


ER-FK

Emergency Remote Field Kit

Catalog Number: _____

Type: _____

Project: _____

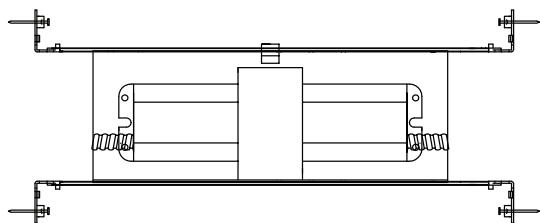

Description

The ER-FK works in conjunction with a Compact Fluorescent AC ballast to convert luminaires to emergency lighting.

Features

- Nickel Cadmium battery.
- 90 minutes of emergency operation.
- Mounting bracket includes BH1 Barhangers.
- Includes threaded body test switch (TBTS)
- Junction box supplied by others.
- UL listed.

CATALOG SYSTEM

SAMPLE CATALOG NUMBER: ER-FK

ER-FK

Emergency Remote Field Kit^{1,2,3,4}

Footnotes:

1. IOTA-I-42-EM-A
2. UL Listed for dry location
3. UL Listed for direct contact with thermal insulation.
4. Remote mounting available up to 3 feet from luminaire.

SPECIFICATIONS

1. **Battery** - High temperature nickel cadmium ballast for 4-pin CFL lamps. 90 minute AC output. Operating temperature 0° to 55°C. Dual voltage 120/277V, 60Hz.

2. **Lamps Operated** - 10-42 watt 4-pin rapid start triple or quad tube CFL lamps.

3. **Mounting** - Mounting Pan constructed of 18GA galvanized steel and includes pre-installed BH1 bar hangers.

4. **Bar Hangers** - Pre-installed Quick-Lok BH1 bar hangers are equipped with heavy duty fluted nails, to allow for t-grid or wood joist applications.

5. **UL Listed** - Dry location and for direct contact with thermal insulation.

6. **Threaded Body Test Switch** - TBTS to be mounted in junction box (provided by others) in the ceiling tile adjacent to the fixture within 18 inches.


1 LAMP

13 watt	350
18 watt	350
26 watt	425
32 watt	600
42 watt	750

LUMEN OUTPUT

*For two lamp operation, consult factory.

DIMENSIONS

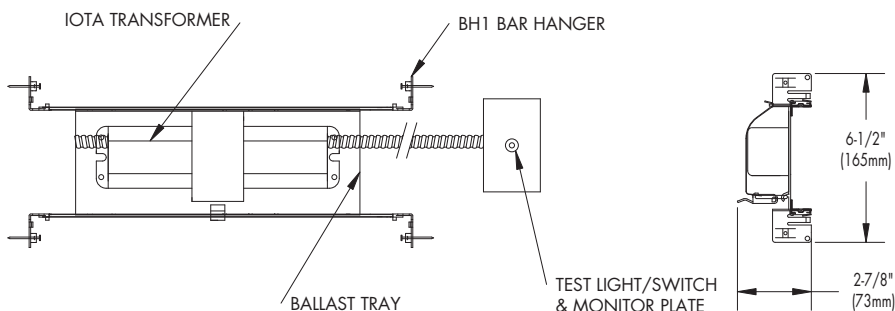

REV. 12/07

Capri Lighting reserves the right to make changes without notice.©2007

RC2-99

CAPRI LIGHTING:
776 South Green St., Tupelo, MS 38804
Phone 662.842.7212 FAX 662.841.5501
www.caprilighting.com

THOMAS LIGHTING CANADA:
189 Bullock Drive, Markham, Ontario, Canada L3P 1W4
Phone 905.294.9570 FAX 800.268.0003
www.thomaslightingcanada.com

capri
LIGHTING