

**SIGNAL LIGHT**

207 SERIES



Vertical Unit Incandescent 53 Watt R-20 Lamp



Traffic control applications.

Separately switched indicator lights.

Injection molded, impact resistant, Lexan® polycarbonate housing and hoods.

Vertical and horizontal units.

3" deep hoods for even illumination and maximum visibility.

Available in either incandescent or LED illumination.

Incandescent uses (2) 53 Watt R-20 traffic lamps.

LED uses (2) 5 Watt LED Light Engines.

Optional 3-position remote lighted indicator switch:

ON / OFF / ON

Standard wall mount included; optional ceiling and post mountings available.

Typical applications include bank and fast food drive-up windows, parking garages, tollbooths, hospitals, and other indoor/outdoor areas anywhere directional control, "stop-go" or "on-off" type functions are indicated.



Horizontal Unit LED Light Engine 5 Watts





# EXIT/DIRECTIONAL SIGNAL LIGHT 207 SERIES

F4.1

ALKCO

TYPE

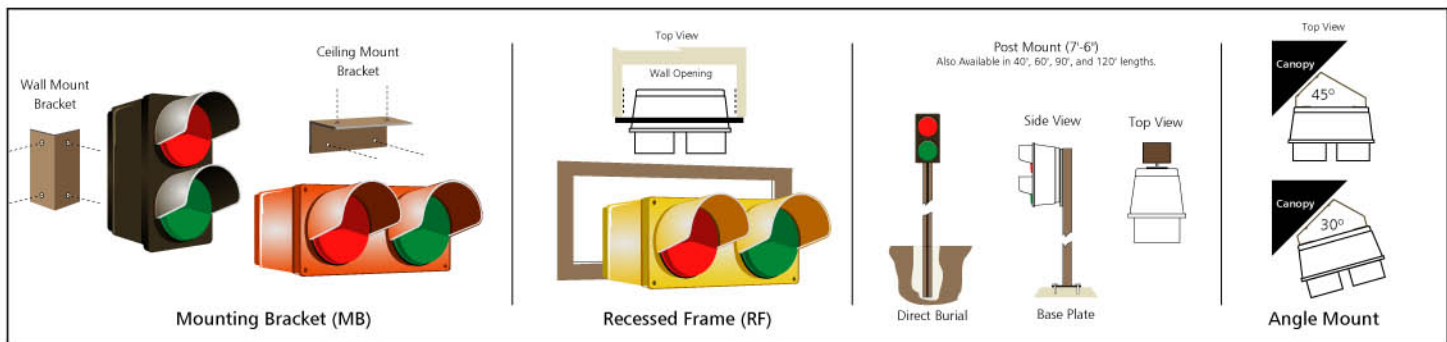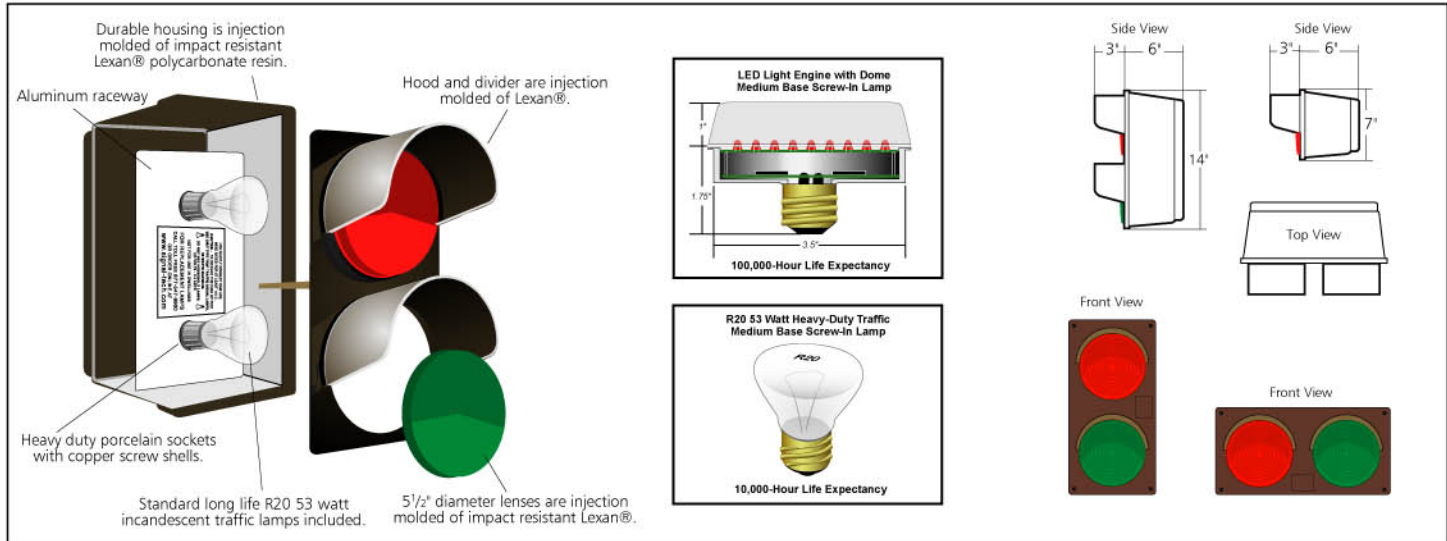

## SPECIFICATIONS

### CONSTRUCTION

Housing and hooded cover are injection molded of high impact Lexan® polycarbonate resin.

### FINISH

Duranodic Bronze or Custom Colors

### LENSES

5 1/2" diameter polycarbonate lenses. Lenses are chemically bonded to cover. Red and Green lenses standard, call factory for special colors.

### ELECTRICAL

Heavy duty porcelain sockets with copper screw shell, 120 VAC standard.

### MOUNTING STYLES (Optional)

Semi-recessed, wall/ceiling bracket mount, post mount, angle canopy mount.

### LAMPS

Two R-20 53 watt long life incandescent traffic lamps included.

### LED LAMPS (Optional)

Two LED Light Engine lamps. Low power consuming (5 watts each), ultra-long life lamps (100,000 hours). Red and Green LED Light Engines standard, call factory for special LED colors.

### INSTALLATION

Four 1/4" mounting holes and one 7/8" diam. knockout for electrical connection.

### LABELS

U.L. Listed for outdoor application, wet location label.



## ORDERING INFORMATION

Catalog Number	Description	L	H	D
207H	Horizontal, Surface mount	14"	7"	9"
207V	Vertical, Surface mount	7"	14"	9"

## OPTIONAL EQUIPMENT (Add as Suffix):

LE-R	(1) Red LED Light Engine
LE-G	(1) Green LED Light Engine
FLS	Flasher

## OPTIONAL MOUNTING (Add as Suffix):

FR207	Aluminum flange for semi-recessed mounting
BRK207	Wall or ceiling mounting bracket
P-207	7'-6" Mounting post (Other sizes available)
AMIV	Angle mount Vertical (Dual angle 30° & 45°)
AMIH	Angle mount Horizontal (Dual angle 30° & 45°)

## OPTIONAL SWITCHING EQUIPMENT

1SW	3-position lighted indicator switch
2SW	2-gang, 3-position lighted indicator switch
3SW	3-gang, 3-position lighted indicator switch
4SW	4-gang, 3-position lighted indicator switch
5SW	5-gang, 3-position lighted indicator switch
6SW	6-gang, 3-position lighted indicator switch