
Page 1 of 1

4 1/2" Aperture Triple Tube CFL Conversion Kit

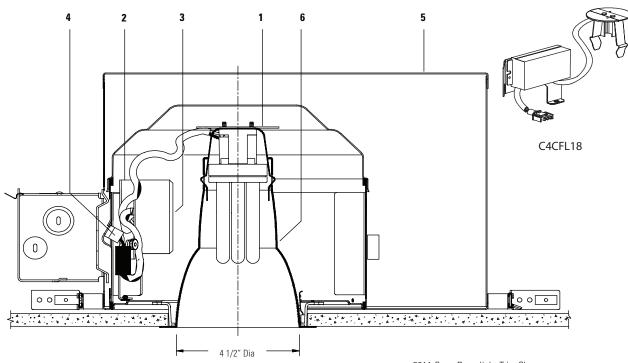

8011 Open Downlight Trim Shown

A complete fluorescent luminaire consists of Fluorescent Conversion Kit, Evolution Incandescent Frame-In Kit & Fluorescent Reflector Trim. Order each separately.

| CFL Conversion Kit | | Frame-In Kit Reflector Trim Series | | |
|--------------------|-------------------|---------------------------------------|----------------------------|------------------------------|
| Catalog No. | Lamp | Compatible Evolution Frame-in Kits | Vertical Open Downlight | Vertical Open Wall Washer |
| C4CFL18 | 1-18W Triple Tube | C4AIC | 8011 | 8011WW |

Features

CFL Conversion Kit: Designed for field conversion of 4 1/2" Evolution incandescent 120V Frame-In kit to energy saving compact fluorescent lamp without additional rewiring, or can be used in new installation. Use compatible Calculite CFL reflector trims.

- 1. Lampholder Assembly: Die-formed lampholder plate and spring snaps onto reflector neck for easy tool-less installation; assures lamps maintain proper optical alignment to reflector. Prewired with #18 ga. AWM leads to ballast.
- 2. Ballast Mounting Bracket: Die-formed steel, 16 ga. galvanized steel; slides onto frame housing for easy attachment. Built-in rubber feet to ensure quiet operation.
- 3. Ballast: 120V, electronic, short circuit and end-of-lamp-life protection THD<10%, Class P, high power factor, No PCBs, quiet operation. Meets FCC part 18 limits for conducted and radiated electromagnetic radiation to eliminate interference with other electronic devices.
- 4. Quick Power Plug: Keyed to accept connector from Frame-In Kit; provides power to ballast.
- 5. Frame-In Kits: Compatible frame is listed above. See separate reflector trim/Frame-In Kit specification sheets for additional information.
- 6. Reflector Trims: Compatible reflector trims are listed above. See separate reflector trim specification sheets for complete catalog number, finishes, and details.

Options & Accessories

2-Wire Dimming Consult factory

Electrical

| Lamp | Input Watts | Input Current | Ballast Factor |
|-------|-------------|---------------|----------------|
| 1-18W | 20 | 0.17A | 1.05 |

Labels

UL listed for damp locations, I.B.E.W.

| Job Information | Туре: |
|-----------------|-------|
| Job Name: | |
| Cat. No.: | |
| | |
| Lamp(s): | |
| Notes: | |
| | |
| | |
| | |

Lightolier a Genlyte Thomas Company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2011 Genlyte Thomas Group LLC (Lightolier Division) • B0711