



Mounting Systems

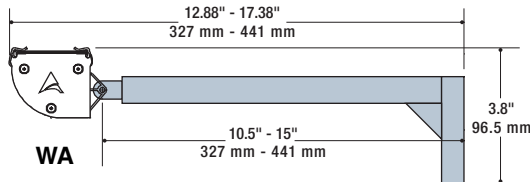

NOTE: The recommended quantity of mounting brackets is illustrated in the following chart:

Fixture length	Quantity of brackets
1' - 4'	2
5' - 8'	3
9' - 10'	4

SPECIFICATIONS:

- Miniature low voltage, linear lighting for wet locations.

Housing:

- Extruded aluminum alloy, 10' (3.0 meter) maximum length.
- Available in satin anodized or powdercoat painted finish.
- Custom paint finish available, consult factory.
- Watertight connector for weatherproof cable (12" cable included).
- High density closed cell foam gasket.

End Caps:

- Stamped 0.18" (.5 mm) thick aluminum end plates with die-formed gasket.

Lens Clasps:

- Extruded aluminum lens clasps permit servicing fixture by removing lens.

Clikstrip (order separately):

- Accepts CLX Series Clikstrip™, 12V or 24V, up to 10 watt festoon and looped lamps. Clikstrip™ ordered separately and assembled into housing at factory.

Lens:

- UV protected clear polycarbonate with UL F1 rating.
- Lens retained to housing by linear extruded aluminum clasps.

Compliances:

- UL/C Wet Location Listed, IP64 Approved for base up or base down positions.

Mounting:

- Choice of rotatable wall mount brackets or telescoping arm brackets. Ordered separately.
- Fixture clips into place and is secured with screws.
- For recommended maximum distance between mounting brackets, see mounting chart.

Louvers:

- Choice of optional cross blade or longitudinal louvers available in 12" (305mm) lengths. Ordered separately.

Reflector:

- Optional #CLM-SR precision extruded parabolic 23° beam spread with polished specular finish. Ordered separately.

Remote Power Supply:

- UL Listed and CSA Certified for use with UL/C approved magnetic or electronic transformers. Refer to Ardee Lighting Transformer Specifications.

Ordering Information

To specify a complete catalog number, choose one item from the selection available in each module.

Example: CLM-05-M-C-BK-1

CLM - ____ - ____ - C - ____ - ____

CLM	-XX	-X	-C	-XX	-X
-----	-----	----	----	-----	----

Series

CLM	Clikstrip wet miniature
-----	-------------------------

Fixture length

CLM	-01 to -10	by the foot
-----	------------	-------------

CLM	-05 to -30	by the meter
-----	------------	--------------

Nom. unit of measure

CLM	-XX	-F	Feet
-----	-----	----	------

CLM	-XX	-M	Meter
-----	-----	----	-------

Lens type

CLM	-XX	-X	-C	Clear polycarbonate
-----	-----	----	----	---------------------

Finish

CLM	-XX	-X	-C	-WH	Powder coat white paint
-----	-----	----	----	-----	-------------------------

CLM	-XX	-X	-C	-BK	Powder coat black paint
-----	-----	----	----	-----	-------------------------

CLM	-XX	-X	-C	-BZ	Powder coat bronze paint
-----	-----	----	----	-----	--------------------------

CLM	-XX	-X	-C	-GR	Powder coat steel gray paint
-----	-----	----	----	-----	------------------------------

CLM	-XX	-X	-C	-SA	Satin aluminum anodized
-----	-----	----	----	-----	-------------------------

CLM	-XX	-X	-C	-CF	Custom finish (specify)
-----	-----	----	----	-----	-------------------------

Power feed location (1 fitting included)

CLM	-XX	-X	-C	-XX	-1	Left endcap
-----	-----	----	----	-----	----	-------------

CLM	-XX	-X	-C	-XX	-2	Left backside*
-----	-----	----	----	-----	----	----------------

CLM	-XX	-X	-C	-XX	-3	Right backside
-----	-----	----	----	-----	----	----------------

CLM	-XX	-X	-C	-XX	-4	Right endcap
-----	-----	----	----	-----	----	--------------

Option

CLM	-XX	-X	-C	-XX	-X	-TP	Tamper-proof housing
-----	-----	----	----	-----	----	-----	----------------------

* Standard powerfeed location will be position #2 (left backside) unless specified otherwise.

Mounting Systems Ordering Information

To specify a complete catalog number, choose one item from the selection available in each module.

Example: CLM-WB-BZ

CLM - ____ - ____

115	-XX	-XX
-----	-----	-----

Series

CLM	Clikstrip wet miniature
-----	-------------------------

Type

CLM	-WB	Wall bracket
-----	-----	--------------

CLM	-WA	Telescoping wall mounting arm
-----	-----	-------------------------------

Color

CLM	-XX	-WH	Powder coat white paint
-----	-----	-----	-------------------------

CLM	-XX	-BK	Powder coat black paint
-----	-----	-----	-------------------------

CLM	-XX	-BZ	Powder coat bronze paint
-----	-----	-----	--------------------------


CLM	-XX	-GR	Powder coat steel gray paint
-----	-----	-----	------------------------------

CLM	-XX	-SA	Satin aluminum anodized
-----	-----	-----	-------------------------


CLM	-XX	-CF	Custom finish (specify)
-----	-----	-----	-------------------------

Optional louvers

Optional crossblade or longitudinal louvers are available in 1' (305mm) increments when specified with CLM Series. They will be fitted at the factory, but can easily be trimmed in the field. Order separately.



VIEW WITH
LONGITUDINAL LOUVER



VIEW WITH
CROSS BLADE LOUVER

Louver Ordering Information

To specify a complete catalog number, choose one item from the selection available in each module.

Example: CLM-CB

CLM - ____

115	-XX
-----	-----

Series

CLM	Clikstrip wet miniature
-----	-------------------------

Type

CLM	-CB	Cross blade louver, matte black finish
-----	-----	--

CLM	-LB	Longitudinal louver, matte black finish
-----	-----	---

Ardee Lighting reserves the right to change product specifications without prior notification.

Powerfeed Supplemental Information

Individual/End fixture powerfeed


- ☐ -1 Left endcap (individual fixture only)
- ☐ -2 Left backside (individual/end fixture)*
- ☐ -3 Right backside (individual/end fixture)
- ☐ -4 Right endcap (individual fixture only)

Select one powerfeed location.

* Standard powerfeed location will be position #2 (left backside) unless specified otherwise.

Notes:

- 12" long, 3-wire, 20 amp power cord supplied when WB ball bracket is specified.
- Consult factory for additional power cord length when ordering WA adjustable bracket or other mounting options.
- Individual fixtures available in lengths **up to 10 ft/3 m**.

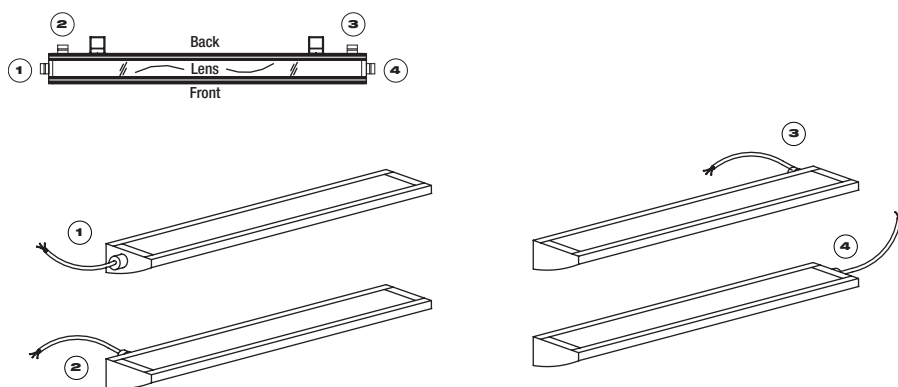

Ardee Lighting reserves the right to change product specifications without prior notification.

ARDEE LIGHTING		
11/15/2006 page 3 of 3	PO Box 1769 • 639 Washburn Switch Rd • Shelby • NC 28151 T 704.482.2811 F 800.275.1544 E ardee@jjishelby.com www.ardeelighting.com	022090