


# Universal Celebrity Wall CWBU Series

Page 1 of 2





Wall Mounted Fluorescent, 7-5/8" Width, 24", 48" Lengths  
Uplight/Downlight or Downlight Only, 1 or 2 Lamp T8

## Features




- Universal luminaire that has uplight/downlight or downlight only capabilities on the same fixture
- Low brightness controlled uplighting/downlighting
- Injection-molded one-piece virgin acrylic downlight refractor (1 side, 2 ends and face)
- Catadioptric side and end wall design (downlight)
- Slim 3-1/16" depth
- Nominal 2' and 4' lengths
- 67.1% efficient (T8 lamps, uplight/downlight)
- 63.0% efficient (T8 lamps, downlight only)
- Invisible steel latches align refractor to housing
- Individual or continuous rows
- For over mirror, over bed, corridor, stairwell and bulletin board applications

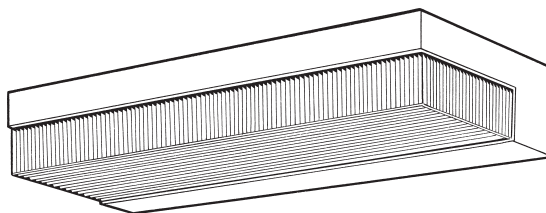

## Dimensions

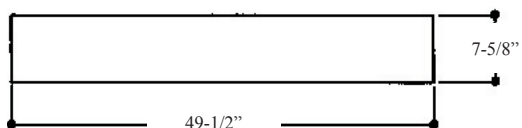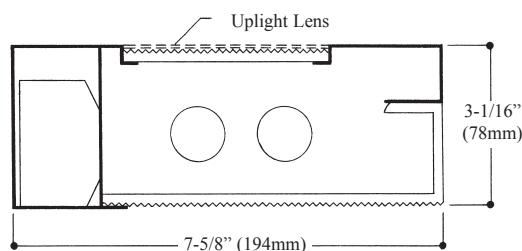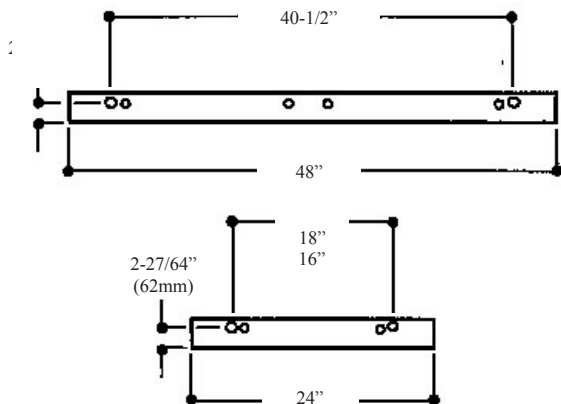

## Features



## Job Information

## Type:

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Volts/Ballast:**

CFI Fluorescent - A Division of Canlyte

www.canlyte.com

Technical Information: (613) 938-6221 • Fax (613) 938-9576


525 Education Road, Cornwall, ON K6H 6C7

We reserve the right to change details of design, materials and finish.

Copyright 2003 Lightolier

Folio U-I20-13-04

CFI FLUORESCENT




# Universal Celebrity Wall CWBU Series

Page 2 of 2

Wall Mounted Fluorescent, 7-5/8" Width, 24", 48" Lengths  
Uplight/Downlight or Downlight Only, 1 or 2 Lamp T8


## Photometry

Model No. CWBU232UNVSO (Uplight/Downlight)

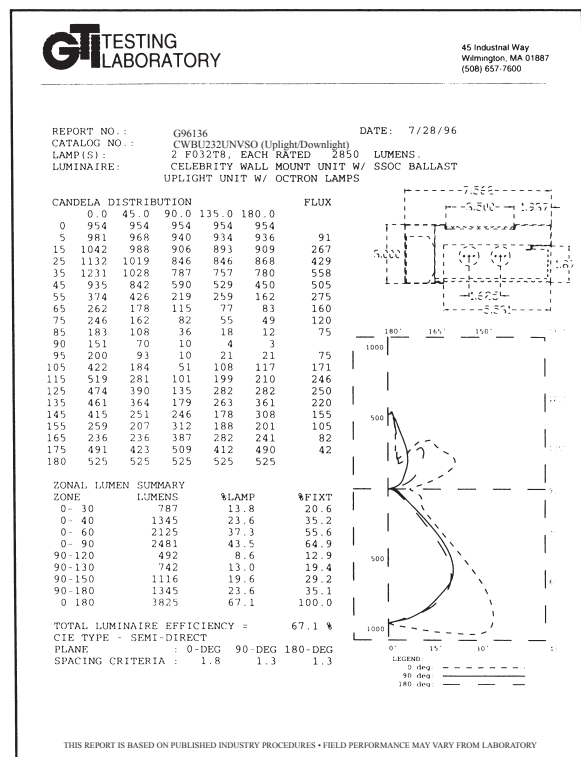

## Photometry

Model No. CWBU232UNVSO (Downlight)

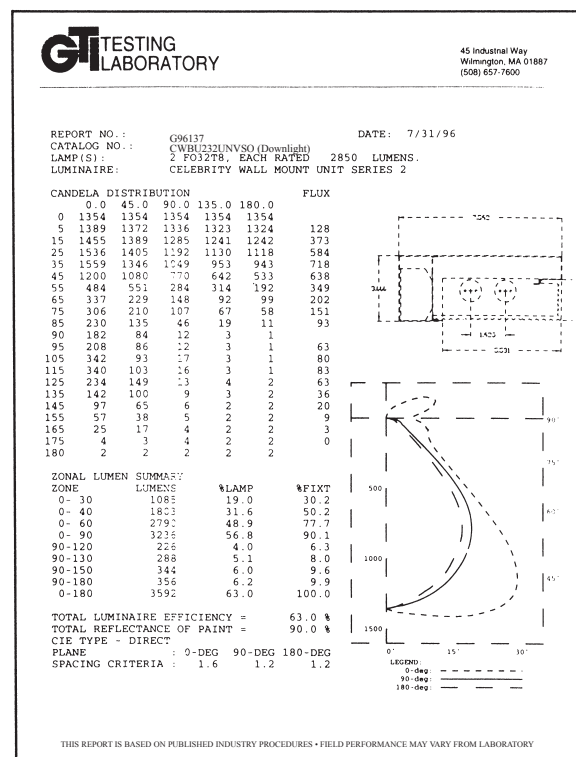

## Ordering Information

Explanation of Catalog Number. Example: CWBU232120SO

<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>
Celebrity Wall Universal Wall Mounted White Body Fluorescent Uplight/Downlight or Downlight Only	Lamp Quantity: 1 = 1 Lamp 2 = 2 Lamp	Lamp Fixture Length: 17=T8, 2' Length 32=T8, 4' Length	Voltage: 120 277 347	Ballast Type: <20THD <10THD 1 & 2 Lamp Elec. (T8) SO* HI* LOL T8 Dimming PS - *Instant Start Standard Other dimming options. Consult factory.	Options: Add appropriate suffix to catalog no, ie: (O)

## Options/Accessories

Radio Interference Filter: 120 or 277 volt, 50 or 60 Hz. One per fixture:  
Suffix: R.

Emergency Power Pack: Factory installed emergency power pack  
includes charger and inverter concealed in fixture channel. Upon loss of  
AC power, operates one lamp at reduce light. Suffix: O.

Electrical Wiring Options: Consult factory.

Note: Consult factory for availability of options for nominal 2' long  
fixtures.

## Specifications

Materials: Chassis parts are die-formed code gauge cold rolled steel.  
Refractor—one-piece virgin acrylic.

Finish: Chassis exterior—white baked acrylic enamel. Cavity—white  
baked acrylic enamel minimum 86% reflectance. Phosphate undercoat-  
ing.

Refractor (downlight): One-piece injection-molded, (full re-entrant vir-  
gin acrylic with Catadioptric side, ends and wall design with diamond  
shap square base male conical prisms on horizontal surface.

## Specifications (continued)

Electrical: Thermally protected class "P" ballast C.B.M. approved, non  
PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90°.  
Labels: I.B.E.W./UL and ULc Listed.

## Job Information

## Type:

CFI Fluorescent - A Division of Canlyte

www.canlyte.com

Technical Information: (613) 938-6221 • Fax (613) 938-9576

525 Education Road, Cornwall, ON K6H 6C7

We reserve the right to change details of design, materials and finish.

Copyright 2003 Lightolier

Folio U-120-13-04

CE FLUORESCENT