


LX Series

STEEL COMBINATION LED EXIT

Page 1 of 2

LX12L1RW2H

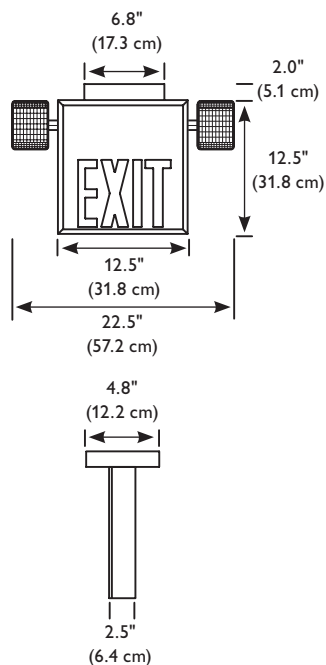

Features

Illumination: Illumination of the exit stencil face is accomplished with either red or green high-output Light Emitting Diodes (LEDs). Hot spots and striations are eliminated by a combination of indirect and direct aiming points covering the exit stencil face. Units are furnished with two 6 VDC, 5.4 W side-mounted lamp heads utilizing a high-intensity tungsten T-5 wedge base lamp.

Housing: Constructed of three-piece, 20 gauge, cold rolled steel. White powder coat finish is standard, black is optional. NFPA-compliant field-selectable chevrons. Universal knockouts located on the backplate allow for wall mounting directly to standard junction boxes. A mounting canopy is provided for top mount applications. Slide-in/slide-out front and back stencils simplify single-to-double face conversions in the field. Side-mounted lamp heads are fully adjustable and are shipped completely assembled.

Operating Temperature

Range:
65°F (19°C) to 85°F (30°C)

Electronics: 120/277 VAC

dual voltage input with surge-protection, solid-state circuitry provides for a reliable charging system. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.

Electrical Specifications:

Red and Green:
0.090 A (120 VAC)
0.039 A (277 VAC)

Code Compliance

UL 924 listed. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

Warranty

Three year full electronics warranty. One year full plus four year prorated lead calcium battery warranty.

Job Information Type:

Job Name:

Cat. No.:

Notes:

PHILIPS
LIGHTOLIER

LX Series

STEEL COMBINATION LED EXIT

Page 2 of 2

Ordering Information

<div>LX</div>						
Series	Battery	# of Faces	Letter Color	Housing Color	Lamp Heads	Factory Installed Options ¹
LX = LX Series Heavy Duty Steel Combination Exit/ Emergency Unit	12L = 12 W Capacity 30L = 30 W Capacity	1 = Single 2 = Double	R = Red G = Green	B = Black W = White	NH = No Heads 1H = One Head 2H = Two Heads	BF = Buzzer/Flasher (emergency units only) BZ = Buzzer (emergency units only) EX = Special Input Transformer (specify voltage and frequency) FA = 24 VDC Fire Alarm Interface FL = Emergency Flasher SW = Special Wording (consult factory)
Accessories (order as a separate item)						
XCKITW = Canopy Kit, White						
XPKITW = Pendant Kit, 12", White Finish						
WG = Wire Guard for Combination Exit/Emergency						

Note

1) Some option combinations may impact UL listing. Consult factory for specifics.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

LX Combo Series September 1, 2011

Specifications are subject to change without notice.

© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information	Type:
------------------------	--------------