

# MJ6 Series


## CHICAGO LED STEEL EXIT

Page 1 of 2


### MJ6E1RW12DEH



Combination Model

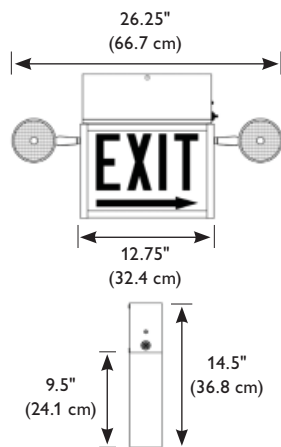

Standard Model

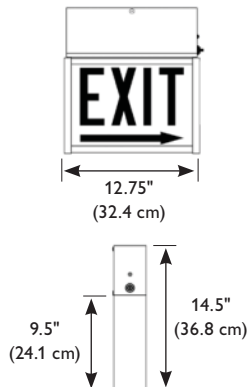

### Features

**Illumination:** Exit face illumination is provided by a special high intensity indirect white LED lighting strips. Letter brightness and illumination uniformity exceed UL requirements. MJ6E-DEH combination models with side mounted lamp heads are provided with 6 V, 12 W halogen bi-pin lamps.

**Housing:** MJ6 Series exits are constructed of heavy-duty steel finished in white baked-on powder paint providing scratch and corrosion resistance. Exit face features 6" letters with 3/4" stroke on translucent glass panels and full length directional arrows to meet City of Chicago visibility requirements. Mounting canopy is standard.

**Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C). 120 minutes of emergency illumination.

**Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.

### Input Power Requirements:

AC Only:

9.6 W (120 VAC)

9.2 W (277 VAC)

Emergency Operation:

10.6 W (120 VAC)

10.2 W (277 VAC)

### Code Compliance

All models are UL listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes. Emergency models are UL 924 listed.

### Warranty

Three year unit warranty (excludes lamps). Three year full plus seven year prorated battery warranty.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

**PHILIPS**  
**LIGHTOLIER**

# MJ6 Series

## CHICAGO LED STEEL EXIT

Page 2 of 2

### Ordering Information

<b>MJ6</b>			<b>RW</b>		
Series	Mode of Operation	# of Faces	Letter Color	Exit Face Designator	Factory Installed Options
<b>MJ6</b> = Chicago Exit	<b>A</b> = AC Only Exit <b>E</b> = Emergency Operation Exit	<b>1</b> = Single Face <b>2</b> = Double Face	<b>RW</b> = Red on White	Single Face Models <b>3</b> = EXIT (No Arrow) <b>6</b> = EXIT (Right Arrow) <b>9</b> = EXIT (Left Arrow) <b>12</b> = EXIT (Double Arrow) <b>2</b> = STAIRS (No Arrow) <b>5</b> = STAIRS (Right Arrow) <b>8</b> = STAIRS (Left Arrow) <b>11</b> = STAIRS (Double Arrow)	<b>DEH</b> = Combination Model w/ Side Mounted Par 36 12 W Halogen Heads <b>SW</b> = Special Wording (consult factory) <b>SX</b> = Self-Diagnostic Circuit (emergency models only) <b>IA</b> = Audible Intermittent Alarm (emergency models only) <b>IV</b> = Visual Intermittent Alarm (emergency models only) <b>FA</b> = Fire Alarm Panel Interface
<b>Accessories (order as a separate item)</b> <b>MJSKW</b> = 18" Stem Mounting Kit (white) <b>MJSKB</b> = 18" Stem Mounting Kit (black) <b>MJPG9</b> = Wire Guard - Wall Mount (AC and emergency models) <b>MJPG10</b> = Wire Guard - Wall Mount (combination models)			Double Face Models <b>18</b> = EXIT (No Arrow) <b>21</b> = EXIT (Right or Left Arrow) <b>24</b> = EXIT (Double Arrow) <b>17</b> = STAIRS (No Arrow) <b>20</b> = STAIRS (Right or Left Arrow) <b>23</b> = STAIRS (Double Arrow)		



Philips Lightolier  
 e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
 t: (508) 679-8131  
 w: [www.lightolier.com](http://www.lightolier.com)

MJ6 Series July 27, 2012

Specifications are subject to change without notice.  
 © Koninklijke Philips Electronics N.V., 2012. All rights reserved.

Job Information Type: