


Translite Systems, Retro 11

Page 1 of 3

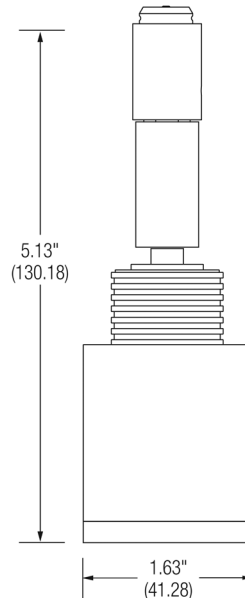


*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

Ordering Information

| Fixture | System | Overall Length | Lamping | Metal Finish |
|----------------------|---|--|---|---|
| REE- Retro 11 | CA4 - Cable 4" CA6 - Cable 6" TR4 - Twin Rail 4" TR6 - Twin Rail 6" BTC - Basis Ceiling BTW - Basis Wall (Max. 16") LT - Liana NS - No System Connector* | ST - Standard 5" 6" - 36" - Specify Length (in 6" increments) (When ordering a non-standard drop length, use whole numbers only - no fractional inches.) | ALR12 - 20w max. MR11 - 35w max. | AL - Satin Aluminum PN - Polished Nickel RB - Rubbed Bronze (Rubbed Bronze is not available for Twin Rail) GB ¹ - Gloss Black WH ¹ - White (¹ Available for BTC, BTW, and NS only) |

| Job Information | Type: |
|---|-------|
| Job Name: Cat. No.: Notes: | |

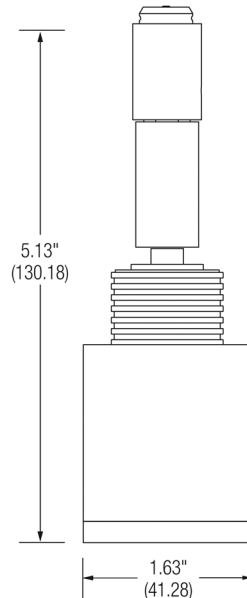

*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

Features

- 1. Description:** Precision machined luminaire with integral single accessory holder.
- 2. System Options:** Retro 11 is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Basis Wall Mount, Liana and low voltage monopoints.
- 3. Lamping:** Phillips Halotone ALR Lamp 20w max. and MR11 35w max.
- 4. Function:** Rotates 360 degrees and pivots 90 degrees at socket. Drop length is not field adjustable.
- 5. Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connector housed in aluminum.

Metal Finishes

- 1. Satin Aluminum**
 - 2. Polished Nickel**
 - 3. Rubbed Bronze**
 - 4. Gloss Black¹**
 - 5. White¹**
- (Rubbed Bronze is not available for Twin Rail)
(¹Available for BTC, BTW, and NS only)

Labels

UL and cUL listed.

| | |
|------------------------|--------------|
| Job Information | Type: |
|------------------------|--------------|

PHILIPS
LIGHTOLIER

Measuring Overall Length

Track System Fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

| | Basis | Cable Twin Rail | Liana | NS |
|------------------------------|-------|--------------------|-------|----|
| System Connector Measurement | .38" | .63" | .94" | 0" |

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.*

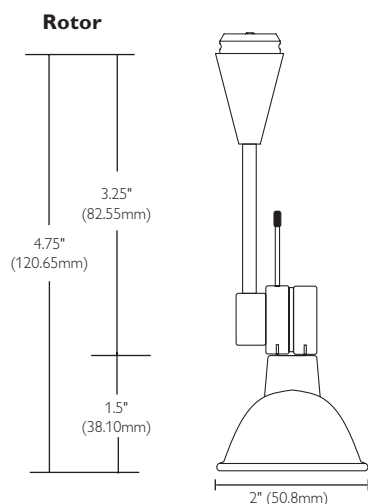

Track System Fixture Example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint Fixture Example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

REE November 14, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information **Type:**