

Simple to use, vandal resistant secure illumination.

RVT CORNER MOUNT RV GUARDSMAN



2', 3' OR 4' RV GUARDSMAN
VANDAL RESISTANT CORNER FLUORESCENT
1, 2 OR 3 LAMP, T8 LINEAR

RV Guardsman provides lighting solutions for maximum, medium and minimum security or high abuse areas. It includes fixtures for surface, recessed or corner wall mounting applications.

Project: _____
Location: _____
Catalog No: _____
Fixture Type: _____
Mfg: _____ Lamps: _____ Qty: _____
Notes: _____

Ordering Guide

Explanation of Catalog Number Example: RVT1CFSVX232120SO

Family	Luminaire Gauge	Luminaire Width	Mounting Style	Door Frame	Lens/Shielding	Lamp Qty in a Luminaire Cross Section	Lamp/ Type	Voltage	Ballast Type	Options
RV	T	1	C	FS						
RV Series	T = Vandal Resistant Security 20 Gauge Housing	1 = Nominal 12"	C = Corner	FS = Vandal Resistant Security 20 Gauge Steel Door Frame	PY = Pattern 12 .187" Nominal Polycarbonate VK = Pattern 12 .140" ACRI-TUF VX = Pattern 12 .125" Polycarbonate	1 = 1 Lamp 2 = 2 Lamps 3 = 3 Lamps	32 = T8 32W 25 = T8 25W 17 = T8 17W	UNV = 120/277V 120 = 120V 277 = 277V 347 = 347V	SO = Elect. T8, 1 or 2 Lamp I.S. 03 = Elect. T8, 3 Lamp I.S. Consult Your Philips Lighting Representative for Other Ballast Options	Consult Your Philips Lighting Representative

RVT CORNER MOUNT RV GUARDSMAN

Features

- Ideal for areas where vandalism is a concern (i.e., schools, locker rooms, corridors, stairwells).
- 20 gauge post painted housing and door frame.
- Door frame is hinged on one side and latched with up to 4 TORX screws.
- Full flush steel hinged lens frame.
- Lenses available in prismatic acrylic and prismatic polycarbonate.
- Snap-in ballast cover.

Specifications

Materials: Chassis parts are 20 gauge cold rolled steel.

Hinging: 20 gauge cold rolled steel with all seams welded and ground smooth, and secured with up to 4 TORX screws with latched and hinged door frame.

Finish: Chassis exterior—white baked polyester enamel. Phosphate undercoating.

Electrical: Rapid start HPF, thermally protected class "P" ballast C.B.M. approved, certified by E.T.L. If K.O. is within 3" of ballast, use wire suitable for at least 90°.



Labels: Listed by CSA.

This product may have a mercury containing lamp. Manage in accord with Disposal Laws. See: www.lamprecycle.org


Options/Accessories

Tamperproof Tools: Ordered separately. TORX Security Screw Driver: Catalog number **OP21864**.

Dimensions

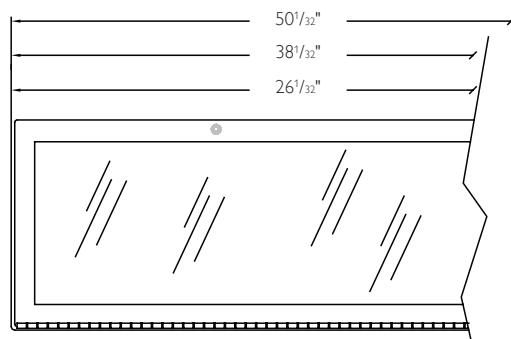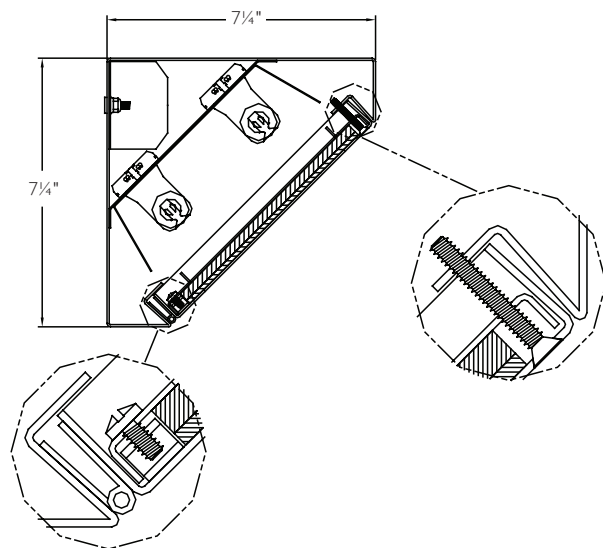

Characteristics



Seamless corner design—no rough edges.

Note: Picture shown with piano hinge. Only available on maximum and medium security models.

RVT CORNER MOUNT RV GUARDSMAN

Performance

Model No. RVX1CXDUS232120SO

Report Number: LSC A912


Catalog Number: RVX1CXDUS232120SO

Lamp: (2) F32T8/TL841

Ballast: Advance REL-2P32-SC

Report is based on 2950 lumens per lamp.

Efficiency: 41.7%

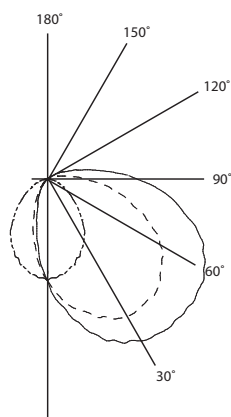

Candela Distribution

Angle	90	67.5	45.0	22.5	Beam	Output Lumens
0	627	627	627	627	627	
5	612	656	715	752	764	35
15	563	706	843	961	976	116
25	488	731	952	1090	1121	206
35	401	692	979	1141	1174	282
45	272	606	962	1128	1184	330
55	170	490	865	1078	1154	345
65	92	340	718	977	1061	325
75	29	207	524	810	891	264
85	0	112	320	568	683	180
90	0	55	223	429	548	
95	0	29	150	327	422	99
105	0	0	64	158	203	44
115	0	0	11	53	96	14
125	0	0	0	0	6	1
135	0	0	0	0	0	0
145	0	0	0	0	0	0
155	0	0	0	0	0	0
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	0

Coefficients of Utilization

Ceiling		80%			50%			30%		
Wall		70	50	30	50	30	10	50	30	10
RCR		Zonal Cavity Method—Effective Floor Cavity Reflectance = 0.20								
Room Cavity Ratio	1	44	41	39	38	36	35	36	34	33
	2	39	36	32	32	30	28	31	29	27
	3	36	31	27	28	26	23	27	24	22
	4	33	27	23	25	22	20	24	21	19
	5	30	24	20	22	19	16	21	18	16
	6	27	21	17	20	16	14	19	16	14
	7	25	19	15	18	14	12	17	14	12
	8	23	17	13	16	13	10	15	12	10
	9	21	15	12	14	11	09	14	11	09
	10	20	14	10	13	10	08	12	10	08

Luminance Data in Candela/Sq. Meter

Average in Deg.	Average 0 Deg.	Average 45 Deg.	Average 90 Deg.
45	3409	7097	7427
55	2627	6682	7353
65	1929	6012	7086
75	993	4930	6457
85	0	3595	5586

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixt
0-30	486	8.25	19.80
0-40	810	13.74	32.96
0-60	1522	25.81	61.94
0-90	2300	39.00	93.58
40-90	1490	25.26	60.62
60-90	777	13.18	31.64
90-180	157	2.67	6.42
0-180	2458	41.67	100.00



© 2013 Koninklijke Philips N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008