


# CT7310

## Capri Track - Line Voltage

Catalog Number: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Project: \_\_\_\_\_

TR2-1

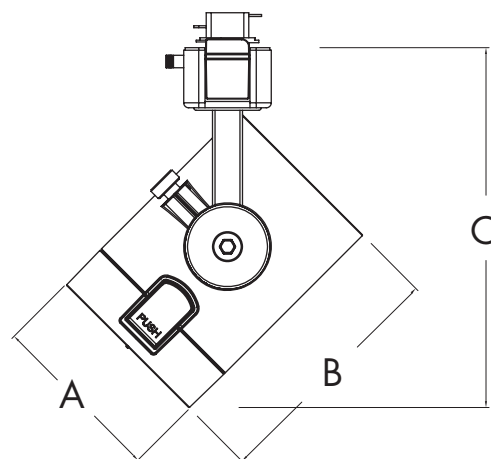

### LEGEND

Diameter: A = 2-3/4" (70mm)  
 Length: B = 3-7/8" (98mm)  
 Max. Height: C = 5-11/16" (145mm)

## PRODUCT DESCRIPTIONS

Die-cast aluminum lamp housing with a mounting stem profile. The CT7310 is designed for use with Philips Lightolier's Capri Track two circuit/ two neutral, 120V/20A track lighting system or monopoint canopy.

## CATALOG SYSTEM & OPTIONS

CATALOG NO.	FINISH	ACCESSORIES (ordered separately)	AVAILABLE LAMP SOURCE
CT7310	W - white BK - black SL - silver	CF40- CF46 see filter/lens chart on reverse side of sheet CL25 - louver	PAR16; GU10 base 50W max

## SPECIFICATIONS

**Lamp Housing** - Die-cast aluminum housing, tilts vertically to 180° and rotates horizontally up to 360°. The housing comes standard with a toolless, front lens ring hinge and latch system for easy access to the lamp and accessories.

**Swiss Movement Aiming System** - The silk screened Swiss movement aiming system "clicks" into place to ensure precise aiming up to 180°. Attached set screw securely locks the lamp housing into the preferred aiming position.

**Captive Media Ring** - The smooth, black captive media ring holds up to three media, a louver and two lenses intact during relamping or maintenance.

**Finishes** - Wet coat finish is available in white (W), black (BK) and silver (SL).

**On/Off Switch** - Integral switch on the track plug housing permits safe interruption of power to the individual luminaire for routine relamping and maintenance.

**Dimming** - Dimming is available on this track system; consult factory for dimming manufacturer compatibility.

**ETL and c/ETL Listed**

## LAMP DATA

### PAR16 HALOGEN LAMPS

	BEAM SPREAD	CBCP	RATED LIFE
<b>50 watt</b> PAR16 spot	10°	3800	3 000

Consult lamp manufacturer for availability and performance data.

<b>50 watt</b> PAR16 flood	27°	1250	3000
----------------------------------	-----	------	------

Consult lamp manufacturer for availability and performance data.


## COLOR FILTERS & LENSES



- CF40** UV Filter, 2-3/16" Dia.
- CF41** Clear Filter, 2-3/16" Dia.
- CF43** Blue Filter, 2-3/16" Dia.
- CF44** Red Filter, 2-3/16" Dia.
- CF45** Green Filter, 2-3/16" Dia.
- CF46** Amber Filter, 2-3/16" Dia.

Note: UV Filters are available in other sizes.  
Consult factory.

## LOUVER



**CL25** Louver, 2-3/16" Dia.



© 2013 Koninklijke Philips N.V. (Royal Philips). All rights reserved.  
Specifications are subject to change without notice.  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

TR2-1 06/13 page 2 of 2

Philips Lighting Company  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008