


# CV7317, CV7318

## Capri Track - Low Voltage

Catalog Number: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Project: \_\_\_\_\_

TR2-5



### LEGEND

Diameter: A = 2-3/4" (70mm)  
 Length: B = 3-7/8" (98mm)  
 Max. Height: C = 6" (152mm)

### PRODUCT DESCRIPTION

Die-cast aluminum lamp housing with an extruded vertical transformer housing. The CV7317, CV7318 is designed for use with Philips Lightolier's Capri Track two circuit/ two neutral, 120V/20A track lighting system or monopoint canopy.

### CATALOG SYSTEM & OPTIONS

CATALOG NO.	FINISH	ACCESSORIES (ordered separately)	AVAILABLE LAMP SOURCES
<b>CV7317</b> <b>CV7318</b>	<b>W</b> - white <b>BK</b> - black <b>SL</b> - silver	<b>CF40- CF46</b> see filter/lens chart on reverse side of sheet  <b>CL25</b> - louver	<b>MR16; Bi-pin base</b> 50W max (CV7317)  <b>MR16; GU7 base</b> 50W max (CV7318)

### SPECIFICATIONS

**Lamp Housing** - Die-cast aluminum housing, tilts vertically to 180° and rotates horizontally up to 360°. The housing comes standard with a toolless, front lens ring hinge and latch system for easy access to the lamp and accessories.

**Transformer/Transformer Housing** - Standard 12V integral electronic transformer is housed in an extruded aluminum housing is vented for heat dissipation.

**Swiss Movement Aiming System** - The silk screened, Swiss movement aiming system "clicks" into place to ensure precise aiming up to 180°. Attached set screw securely locks the lamp housing into the preferred aiming position.

**Captive Media Ring** - The smooth, black captive media ring holds up to three media, a louver and two lenses, intact during relamping or maintenance.

**Safety Lens** - Tempered glass lens meets and exceeds ETL safety standards.

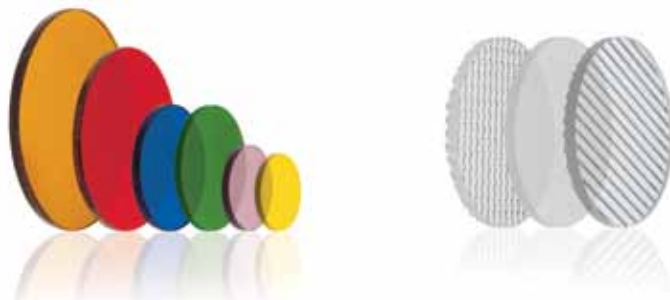
**Finishes** - Wet coat finish is available in white (W), black (BK) and silver (SL).

**On/Off Switch** - Integral switch on the bottom of the transformer housing permits safe interruption of power to the individual luminaire for routine relamping and maintenance.

**ETL and c/ETL Listed**


**MR16 HALOGEN LAMPS**

				horizontal aiming angles								vertical aiming angles									
				0°				30°				30°				45°					
				MH	FC	L	W	MH	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
<b>20W MR16 narrow spot ESX</b>	BEAM Spread 13°	CBCP 6000	Rated Life 5000	6	100	1.4	1.4	5	94	1.5	1.3	2	3.5	113	1.9	.9	3	3.0	141	1.4	1.0
				8	56	1.8	1.8	7	48	2.1	1.8	3	5.2	50	2.8	1.4	5	5.0	51	2.3	1.6
				10	36	2.3	2.3	9	29	2.7	2.4	4	6.9	28	3.8	1.8	7	7.0	26	3.2	2.3
<b>20W MR16 flood BAB</b>	40°	1000	5000	2	58	2.2	2.2	3	38	3.0	2.5	2	3.5	16	9.7	2.9	3	3.0	21	5.0	3.1
				3	33	2.9	2.9	4	21	4.1	3.4	3	5.2	7	14.5	4.4	4	4.0	12	6.7	4.1
				4	21	3.6	3.6	5	14	5.1	4.2	4	6.9	4	19.3	5.8	5	5.0	7	8.4	5.1
<b>50W MR16 narrow spot EXT</b>	14°	9100	4000	8	159	2.0	2.0	7	135	2.3	2.0	3	5.2	142	3.1	1.5	5	5.0	144	2.5	1.7
				12	71	2.9	2.9	10	66	3.3	2.8	4	6.9	80	4.1	2.0	7	7.0	74	3.5	2.4
				16	40	3.8	3.9	13	39	4.3	3.7	5	8.7	51	5.1	2.5	9	9.0	45	4.5	3.1
<b>50W MR16 narrow flood EXZ</b>	27°	3200	4000	6	94	2.9	2.9	5	88	3.3	2.8	2	3.5	106	4.6	1.9	3	3.0	134	3.1	2.0
				8	53	3.8	3.8	7	45	4.6	3.9	3	5.2	47	7.0	2.9	5	5.0	48	5.1	3.4
					10	34	4.8	4.8	9	27	5.9	5.0	4	6.9	27	9.3	3.6	7	7.0	25	7.1
<b>50W MR16 flood EXN</b>	40°	1700	4000	4	116	2.9	2.9	3	134	3.0	2.5	1	1.7	231	4.8	1.5	3	3.0	73	5.0	3.1
				6	51	4.4	4.4	5	48	5.1	4.2	2	3.5	58	9.7	2.9	4	4.0	41	6.7	4.1
				8	29	5.8	5.8	7	25	7.1	5.9	3	5.2	26	14.5	4.4	5	5.0	26	8.4	5.1

**COLOR FILTERS & LENSES**

- CF40** UV Filter, 2-3/16" Dia.  
**CF41** Clear Filter, 2-3/16" Dia.  
**CF43** Blue Filter, 2-3/16" Dia.  
**CF44** Red Filter, 2-3/16" Dia.  
**CF45** Green Filter, 2-3/16" Dia.  
**CF46** Amber Filter, 2-3/16" Dia.

Note: UV Filters are available in other sizes.  
 Consult factory.

**LOUVER**

**CL25** Louver, 2-3/16" Dia.



© 2013 Koninklijke Philips N.V. (Royal Philips). All rights reserved.  
 Specifications are subject to change without notice.  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting Company  
 200 Franklin Square Drive  
 Somerset, NJ 08873  
 Phone: 855-486-2216

Philips Lighting Company  
 281 Hillmount Road  
 Markham ON, Canada L6C 2S3  
 Phone: 800-668-9008