

CATALOG NO. _____




TYPE NO. _____ JOB NAME _____

Mini-Sealtight Industrial Linear Fluorescent



ORDERING INFORMATION

Catalog Number: Example: MST2R321K2Y

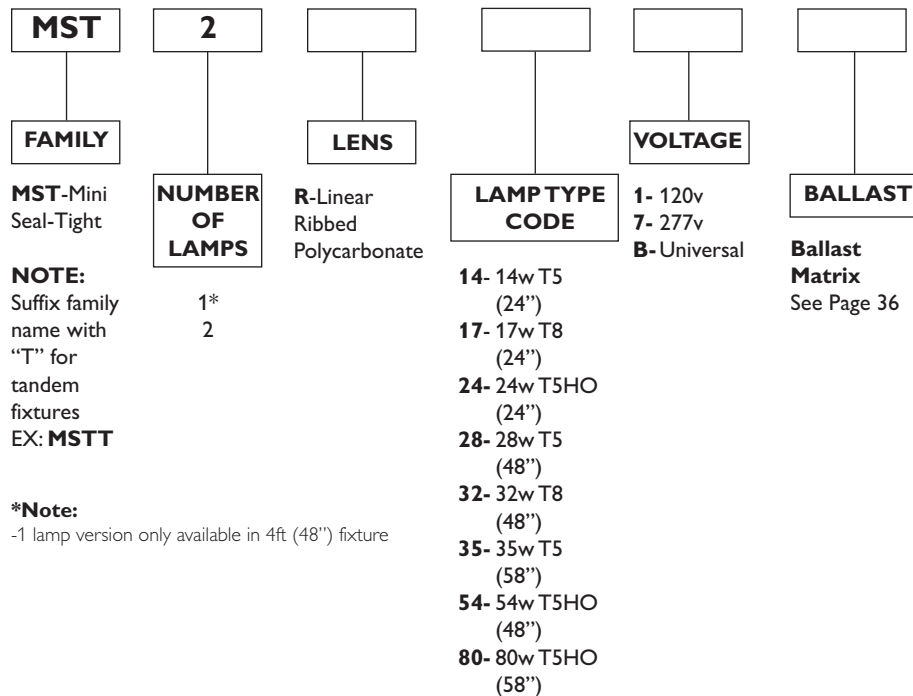

PRODUCT FEATURES

- Mounting brackets included
- Also suitable for damp location
- IP65 rating for ribbed lens and IP67 rating for prismatic lens
- Ballast is retained by gear trays in lieu of channel- reducing weight
- White, one-piece housing is made of 5V-A polycarbonate for added durability and corrosion resistance
- Continuous-poured gasket provides tight seal
- Lense is a polycarbonate linear ribbed pattern
- Polycarbonate latches are standard
- Energy-saving electronic ballasts are standard
- Wet Location UL 1570/cUL C22.2 No.9
- Also suitable for damp locations.
- Optional fluorescent emergency ballast, UL listed
- UL/cUL Listed

PRODUCT AVAILABILITY

NOMINAL SIZE	FAMILY	NUMBER OF LAMPS (per cross section)	LAMP TYPE CODE	LENGTH	WIDTH	HEIGHT
2'	MST	2	14, 17, 24	27"	7-1/4"	4-1/4"
4'	MST	2	28, 32, 54	27"	7-1/4"	4-1/4"

OPTIONS

- C1** - Inline Fuse
C2 - Two Fuses (1 per ballast)
C3 - Slow-Blow Fuse
D1 - Radio Interference Suppressor

