


CATALOG NO. _____




TYPE NO. _____ JOB NAME _____

Sealtight LED Luminaire

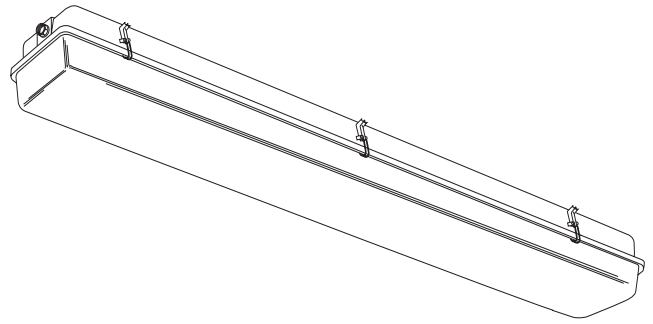

ORDERING INFORMATION

Catalog Number: Example: SLTLED434KDRB

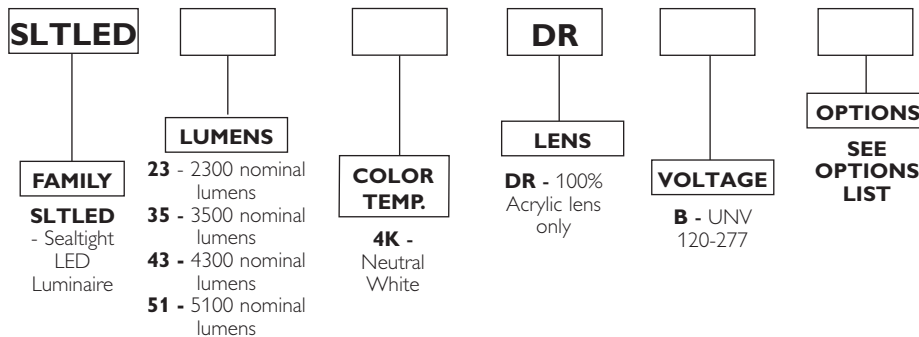

PRODUCT SPECIFICATIONS

- The Sealtight LED is ideal for outdoor as well as indoor installations.
- Can be surface (wall/ceiling) or suspended mounted unless otherwise specified.
- Wet Location-Areas of high humidity, water vapor, rain, incidental water spray, or other non-corrosive or non-flammable liquid.
- Non-conductive, non-corrosive housing.
- Smooth exterior surface for easy cleaning.
- White one piece, molded fiberglass reinforced polyester body. No rusting, no oxidation, and no corrosion.
- Lens formed from crepe pattern high-impact acrylic sheet of .130" nominal thickness.
- Continuous compressible closed cell gasket provides tight seal between plastic enclosure and luminaire body.
- ABS cam action latches.
- Two gasketed threaded (1/2" trade size) wet location hubs installed on ends.
- Mounting brackets available, order separately.
- High efficiency LEDs have 50,000 hour rated life (L70).
- Driver and LED boards are accessible from below. LED boards are individually replaceable if required.
- Combinations are available providing as much as 96 delivered lumens per Watt.
- Lumen packages range from 2,300 to 5,100 lumens, providing flexibility to optimize light levels for a specific application.
- High 80 CRI source provides excellent color rendering.
- Available motion sensor further increases energy savings in areas where occupancy is not continuous.
- IP65 rating standard.
- NSF certified for non food zone installations.
- ETL listed to UL standards.
- Five-year luminaire warranty including LED boards and driver.

ACCESSORIES

- ☐ **TBK** - Stainless Steel Top Bracket Kit (pair of brackets plus hardware)
- ☐ **EBK** - Stainless Steel End Bracket Kit (pair of brackets plus hardware)
- ☐ **WBK** - Stainless Steel Wraparound Bracket Kit (pair of brackets plus hardware)
- ☐ **SSLATCH** - Stainless Steel Latches

OPTIONS




- ☐ **MD360W** - Wet location occupancy sensor, external
- ☐ **SSL** - Stainless steel latch
- ☐ **HN-1** - 6' cord & twist lock plug, 120 Volt*
- ☐ **HN-2** - 6' cord & twist lock plug, 208 Volt*
- ☐ **HN-3** - 6' cord & twist lock plug, 240 Volt*
- ☐ **HN-4** - 6' cord & twist lock plug, 277 Volt*

*Cord & Plug Option= Damp Location ONLY




Sealtight LED Luminaire


Dimensions

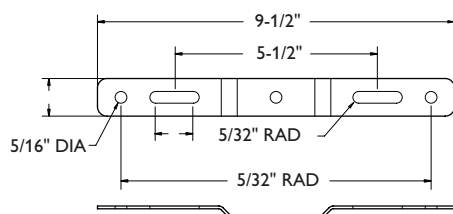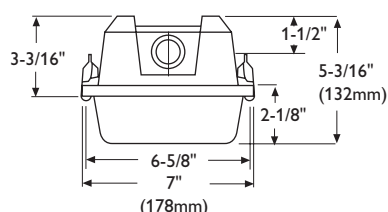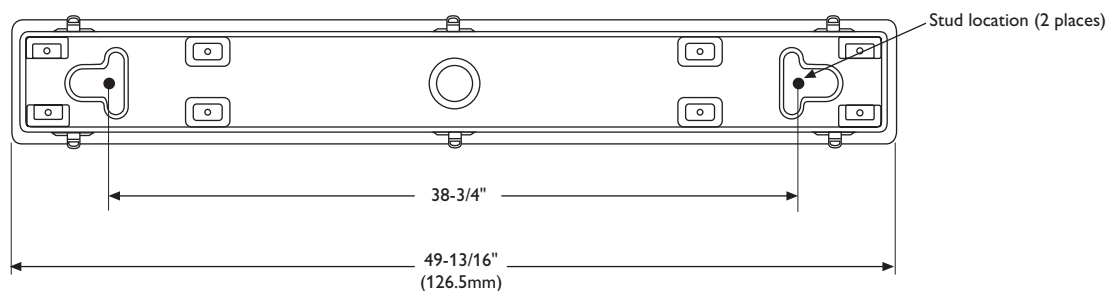


TBK - Top mounting bracket

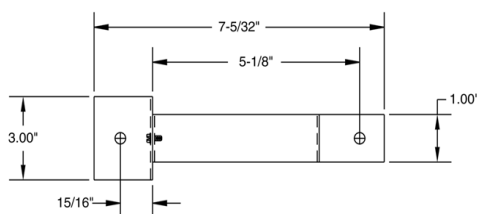

EBK - End mounting bracket



WBK - Wraparound mounting bracket



EBK - End mounting bracket

Sealtight LED Luminaire

Photometry

4' Sealtight LED

Delivered Lumens - 2319

LER - 89

		Candlepower				Light Distribution			Average Luminance																																																																																																																																															
Catalog No.	SLTLED234KDR-8	Angle	End	45	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross																																																																																																																																												
Test No.	LTL23325	0	803	803	803	0-30	628	27.0	45	4192	3318	3082																																																																																																																																												
S/MH	1.2	5	801	801	803	0-40	1024	44.1	55	3727	2790	2782																																																																																																																																												
Lamp Type	LED	15	775	771	784	0-60	1781	76.7	65	3038	2501	2315																																																																																																																																												
Input Watts	26	25	724	726	718	0-90	2279	98.1	75	2287	1784	1563																																																																																																																																												
		35	647	630	627	0-180	2319	100.0	85	1199	788	625																																																																																																																																												
		45	531	519	512	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table><tr><th>pcc</th><th colspan="3">80</th><th colspan="3">70</th><th colspan="3">50</th></tr><tr><th>pw</th><td>70</td><td>50</td><td>30</td><td>70</td><td>50</td><td>30</td><td>50</td><td>30</td><td></td></tr><tr><th>RCR</th><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>110</td><td>110</td><td></td></tr><tr><td>1</td><td>108</td><td>103</td><td>98</td><td>105</td><td>101</td><td>96</td><td>95</td><td>93</td><td></td></tr><tr><td>2</td><td>97</td><td>90</td><td>82</td><td>94</td><td>88</td><td>81</td><td>83</td><td>79</td><td></td></tr><tr><td>3</td><td>90</td><td>79</td><td>70</td><td>86</td><td>77</td><td>69</td><td>73</td><td>67</td><td></td></tr><tr><td>4</td><td>81</td><td>69</td><td>60</td><td>79</td><td>68</td><td>59</td><td>66</td><td>58</td><td></td></tr><tr><td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>51</td><td></td></tr><tr><td>6</td><td>69</td><td>56</td><td>46</td><td>68</td><td>55</td><td>46</td><td>53</td><td>46</td><td></td></tr><tr><td>7</td><td>65</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td><td></td></tr><tr><td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>38</td><td>44</td><td>36</td><td></td></tr><tr><td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>34</td><td></td></tr><tr><td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td><td></td></tr></table>							pcc	80			70			50			pw	70	50	30	70	50	30	50	30		RCR										0	118	118	118	115	115	115	110	110		1	108	103	98	105	101	96	95	93		2	97	90	82	94	88	81	83	79		3	90	79	70	86	77	69	73	67		4	81	69	60	79	68	59	66	58		5	75	61	53	72	60	53	58	51		6	69	56	46	68	55	46	53	46		7	65	51	41	63	50	41	47	40		8	59	46	38	57	46	38	44	36		9	56	42	34	55	41	34	40	34		10	53	39	30	51	39	30	38	30	
pcc	80			70									50																																																																																																																																											
pw	70	50	30	70	50								30	50	30																																																																																																																																									
RCR																																																																																																																																																								
0	118	118	118	115	115								115	110	110																																																																																																																																									
1	108	103	98	105	101								96	95	93																																																																																																																																									
2	97	90	82	94	88								81	83	79																																																																																																																																									
3	90	79	70	86	77								69	73	67																																																																																																																																									
4	81	69	60	79	68								59	66	58																																																																																																																																									
5	75	61	53	72	60								53	58	51																																																																																																																																									
6	69	56	46	68	55								46	53	46																																																																																																																																									
7	65	51	41	63	50	41	47	40																																																																																																																																																
8	59	46	38	57	46	38	44	36																																																																																																																																																
9	56	42	34	55	41	34	40	34																																																																																																																																																
10	53	39	30	51	39	30	38	30																																																																																																																																																
Comparabative yearly lighting energy cost per 1000 lumens - \$2.73 based on 3000 hrs. and \$.08 pwr KWH. Photometric values based on test performed in compliance with LM-79.		75	118	165	164																																																																																																																																																			
		85	26	51	48																																																																																																																																																			
		95	9	15	13																																																																																																																																																			
		105	6	13	10																																																																																																																																																			
		115	2	12	8																																																																																																																																																			
		125	0	9	9																																																																																																																																																			
		135	0	4	8																																																																																																																																																			
		145	0	0	3																																																																																																																																																			
		155	0	0	0																																																																																																																																																			
		165	0	0	0																																																																																																																																																			
		175	0	0	0																																																																																																																																																			

4' Sealtight LED

Delivered Lumens - 3461

LER - 96

		Candlepower				Light Distribution			Average Luminance																																																																																																																																															
Catalog No.	SLTLED354KDR-B	Angle	End	45°	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross																																																																																																																																												
Test No.	LTL23329	0	1201	1201	1201	0-30	929	26.8	45	6298	4918	4752																																																																																																																																												
S/MH	1.2	5	1191	1190	1184	0-40	1520	43.9	55	5635	4220	4130																																																																																																																																												
Lamp Type	LED	15	1153	1153	1149	0-60	2651	76.5	65	4608	3639	3559																																																																																																																																												
Input Watts	36	25	1081	1067	1050	0-90	3393	98.0	75	3422	2832	2418																																																																																																																																												
		35	963	926	933	0-180	3461	100.0	85	1799	1231	942																																																																																																																																												
		45	798	770	789	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table><tr><th>pcc</th><th colspan="3">80</th><th colspan="3">70</th><th colspan="3">50</th></tr><tr><th>pw</th><td>70</td><td>50</td><td>30</td><td>70</td><td>50</td><td>30</td><td>50</td><td>30</td><td></td></tr><tr><th>RCR</th><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>110</td><td>110</td><td></td></tr><tr><td>1</td><td>108</td><td>103</td><td>98</td><td>105</td><td>101</td><td>96</td><td>95</td><td>93</td><td></td></tr><tr><td>2</td><td>97</td><td>90</td><td>82</td><td>94</td><td>88</td><td>81</td><td>83</td><td>79</td><td></td></tr><tr><td>3</td><td>89</td><td>79</td><td>70</td><td>86</td><td>77</td><td>68</td><td>73</td><td>67</td><td></td></tr><tr><td>4</td><td>81</td><td>69</td><td>60</td><td>79</td><td>68</td><td>59</td><td>66</td><td>57</td><td></td></tr><tr><td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>51</td><td></td></tr><tr><td>6</td><td>69</td><td>56</td><td>46</td><td>67</td><td>55</td><td>46</td><td>53</td><td>46</td><td></td></tr><tr><td>7</td><td>64</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td><td></td></tr><tr><td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>38</td><td>44</td><td>36</td><td></td></tr><tr><td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>33</td><td></td></tr><tr><td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td><td></td></tr></table>							pcc	80			70			50			pw	70	50	30	70	50	30	50	30		RCR										0	118	118	118	115	115	115	110	110		1	108	103	98	105	101	96	95	93		2	97	90	82	94	88	81	83	79		3	89	79	70	86	77	68	73	67		4	81	69	60	79	68	59	66	57		5	75	61	53	72	60	53	58	51		6	69	56	46	67	55	46	53	46		7	64	51	41	63	50	41	47	40		8	59	46	38	57	46	38	44	36		9	56	42	34	55	41	34	40	33		10	53	39	30	51	39	30	38	30	
pcc	80			70									50																																																																																																																																											
pw	70	50	30	70	50								30	50	30																																																																																																																																									
RCR																																																																																																																																																								
0	118	118	118	115	115								115	110	110																																																																																																																																									
1	108	103	98	105	101								96	95	93																																																																																																																																									
2	97	90	82	94	88								81	83	79																																																																																																																																									
3	89	79	70	86	77								68	73	67																																																																																																																																									
4	81	69	60	79	68								59	66	57																																																																																																																																									
5	75	61	53	72	60								53	58	51																																																																																																																																									
6	69	56	46	67	55								46	53	46																																																																																																																																									
7	64	51	41	63	50	41	47	40																																																																																																																																																
8	59	46	38	57	46	38	44	36																																																																																																																																																
9	56	42	34	55	41	34	40	33																																																																																																																																																
10	53	39	30	51	39	30	38	30																																																																																																																																																
Comparabative yearly lighting energy cost per 1000 lumens - \$2.73 based on 3000 hrs. and \$.08 pwr KWH. Photometric values based on test performed in compliance with LM-79.		55	589	587	620																																																																																																																																																			
		65	365	427	461																																																																																																																																																			
		75	176	261	254																																																																																																																																																			
		85	40	79	73																																																																																																																																																			
		95	14	25	22																																																																																																																																																			
		105	10	24	17																																																																																																																																																			
		115	3	20	15																																																																																																																																																			
		125	0	11	14																																																																																																																																																			
		135	0	4	9																																																																																																																																																			
		145	0	0	3																																																																																																																																																			
		155	0	0	0																																																																																																																																																			
165	0	0	0																																																																																																																																																					
175	0	0	0																																																																																																																																																					

Sealtight LED Luminaire

Photometry

4' Sealtight LED

Delivered Lumens - 4346

LER - 89

		Candlepower				Light Distribution			Average Luminance																																																																																																																																															
Catalog No.	SLTLED434KDR-B	Angle	End	45°	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross																																																																																																																																												
Test No.	LTL23327	0	1515	1515	1515	0-30	1167	26.8	45	7944	6183	5985																																																																																																																																												
S/MH	1.2	5	1499	1496	1491	0-40	1909	43.9	55	7104	5344	5277																																																																																																																																												
Lamp Type	LED	15	1451	1444	1450	0-60	3336	76.7	65	5811	4617	4468																																																																																																																																												
Input Watts	49	25	1359	1339	1316	0-90	4266	98.1	75	4282	3542	2983																																																																																																																																												
		35	1211	1165	1177	0-180	4346	100.0	85	2216	1470	1084																																																																																																																																												
		45	1006	968	993	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table><tr><th>pcc</th><th colspan="3">80</th><th colspan="3">70</th><th colspan="3">50</th></tr><tr><th>pw</th><td>70</td><td>50</td><td>30</td><td>70</td><td>50</td><td>30</td><td>50</td><td>30</td><td></td></tr><tr><th>RCR</th><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>110</td><td>110</td><td></td></tr><tr><td>1</td><td>108</td><td>103</td><td>98</td><td>105</td><td>101</td><td>96</td><td>95</td><td>93</td><td></td></tr><tr><td>2</td><td>97</td><td>90</td><td>82</td><td>94</td><td>88</td><td>81</td><td>83</td><td>79</td><td></td></tr><tr><td>3</td><td>90</td><td>79</td><td>70</td><td>86</td><td>77</td><td>69</td><td>73</td><td>67</td><td></td></tr><tr><td>4</td><td>81</td><td>69</td><td>60</td><td>79</td><td>68</td><td>59</td><td>66</td><td>57</td><td></td></tr><tr><td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>51</td><td></td></tr><tr><td>6</td><td>69</td><td>56</td><td>46</td><td>68</td><td>55</td><td>46</td><td>53</td><td>46</td><td></td></tr><tr><td>7</td><td>65</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td><td></td></tr><tr><td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>38</td><td>44</td><td>36</td><td></td></tr><tr><td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>33</td><td></td></tr><tr><td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td><td></td></tr></table>							pcc	80			70			50			pw	70	50	30	70	50	30	50	30		RCR										0	118	118	118	115	115	115	110	110		1	108	103	98	105	101	96	95	93		2	97	90	82	94	88	81	83	79		3	90	79	70	86	77	69	73	67		4	81	69	60	79	68	59	66	57		5	75	61	53	72	60	53	58	51		6	69	56	46	68	55	46	53	46		7	65	51	41	63	50	41	47	40		8	59	46	38	57	46	38	44	36		9	56	42	34	55	41	34	40	33		10	53	39	30	51	39	30	38	30	
pcc	80			70									50																																																																																																																																											
pw	70	50	30	70	50								30	50	30																																																																																																																																									
RCR																																																																																																																																																								
0	118	118	118	115	115								115	110	110																																																																																																																																									
1	108	103	98	105	101								96	95	93																																																																																																																																									
2	97	90	82	94	88								81	83	79																																																																																																																																									
3	90	79	70	86	77								69	73	67																																																																																																																																									
4	81	69	60	79	68								59	66	57																																																																																																																																									
5	75	61	53	72	60								53	58	51																																																																																																																																									
6	69	56	46	68	55	46	53	46																																																																																																																																																
7	65	51	41	63	50	41	47	40																																																																																																																																																
8	59	46	38	57	46	38	44	36																																																																																																																																																
9	56	42	34	55	41	34	40	33																																																																																																																																																
10	53	39	30	51	39	30	38	30																																																																																																																																																
		55	742	743	792																																																																																																																																																			
		65	460	542	579																																																																																																																																																			
		75	220	327	314																																																																																																																																																			
		85	49	94	84																																																																																																																																																			
		95	18	29	24																																																																																																																																																			
		105	13	28	20																																																																																																																																																			
		115	4	23	18																																																																																																																																																			
		125	0	13	16																																																																																																																																																			
		135	0	4	11																																																																																																																																																			
		145	0	0	4																																																																																																																																																			
		155	0	0	0																																																																																																																																																			
		165	0	0	0																																																																																																																																																			
		175	0	0	0																																																																																																																																																			
Comparabative yearly lighting energy cost per 1000 lumens - \$2.73 based on 3000 hrs. and \$.08 pwr KWH.																																																																																																																																																								
Photometric values based on test performed in compliance with LM-79.																																																																																																																																																								

4' Sealtight LED

Delivered Lumens - 5121


LER - 87

		Candlepower				Light Distribution			Average Luminance																																																																																																																																															
Catalog No.	SLTLED514KDR-B	Angle	End	45°	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross																																																																																																																																												
Test No.	LTL23331	0	1785	1785	1785	0-30	1376	26.8	45	9310	7277	7038																																																																																																																																												
S/MH	1.2	5	1754	1757	1753	0-40	2249	43.9	55	8317	6239	6147																																																																																																																																												
Lamp Type	LED	15	1708	1701	1704	0-60	3923	76.5	65	6820	5389	5252																																																																																																																																												
Input Watts	59	25	1601	1581	1554	0-90	5021	98.0	75	5047	4186	3572																																																																																																																																												
		35	1426	1372	1383	0-180	5121	100.0	85	2660	1816	1389																																																																																																																																												
		45	1179	1139	1168	Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table><tr><th>pcc</th><th colspan="3">80</th><th colspan="3">70</th><th colspan="3">50</th></tr><tr><th>pw</th><td>70</td><td>50</td><td>30</td><td>70</td><td>50</td><td>30</td><td>50</td><td>30</td><td></td></tr><tr><th>RCR</th><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>110</td><td>110</td><td></td></tr><tr><td>1</td><td>108</td><td>103</td><td>98</td><td>105</td><td>101</td><td>96</td><td>95</td><td>93</td><td></td></tr><tr><td>2</td><td>97</td><td>90</td><td>82</td><td>94</td><td>88</td><td>81</td><td>83</td><td>78</td><td></td></tr><tr><td>3</td><td>89</td><td>79</td><td>70</td><td>86</td><td>77</td><td>68</td><td>73</td><td>67</td><td></td></tr><tr><td>4</td><td>81</td><td>69</td><td>60</td><td>79</td><td>68</td><td>59</td><td>66</td><td>57</td><td></td></tr><tr><td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>51</td><td></td></tr><tr><td>6</td><td>69</td><td>56</td><td>46</td><td>68</td><td>55</td><td>46</td><td>53</td><td>46</td><td></td></tr><tr><td>7</td><td>64</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td><td></td></tr><tr><td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>38</td><td>44</td><td>36</td><td></td></tr><tr><td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>33</td><td></td></tr><tr><td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td><td></td></tr></table>							pcc	80			70			50			pw	70	50	30	70	50	30	50	30		RCR										0	118	118	118	115	115	115	110	110		1	108	103	98	105	101	96	95	93		2	97	90	82	94	88	81	83	78		3	89	79	70	86	77	68	73	67		4	81	69	60	79	68	59	66	57		5	75	61	53	72	60	53	58	51		6	69	56	46	68	55	46	53	46		7	64	51	41	63	50	41	47	40		8	59	46	38	57	46	38	44	36		9	56	42	34	55	41	34	40	33		10	53	39	30	51	39	30	38	30	
pcc	80			70									50																																																																																																																																											
pw	70	50	30	70	50								30	50	30																																																																																																																																									
RCR																																																																																																																																																								
0	118	118	118	115	115								115	110	110																																																																																																																																									
1	108	103	98	105	101								96	95	93																																																																																																																																									
2	97	90	82	94	88								81	83	78																																																																																																																																									
3	89	79	70	86	77								68	73	67																																																																																																																																									
4	81	69	60	79	68								59	66	57																																																																																																																																									
5	75	61	53	72	60								53	58	51																																																																																																																																									
6	69	56	46	68	55	46	53	46																																																																																																																																																
7	64	51	41	63	50	41	47	40																																																																																																																																																
8	59	46	38	57	46	38	44	36																																																																																																																																																
9	56	42	34	55	41	34	40	33																																																																																																																																																
10	53	39	30	51	39	30	38	30																																																																																																																																																
		55	869	868	922																																																																																																																																																			
		65	540	633	680																																																																																																																																																			
		75	259	386	375																																																																																																																																																			
		85	59	117	108																																																																																																																																																			
		95	21	37	32																																																																																																																																																			
Comparabative yearly lighting energy cost per 1000 lumens - \$2.73 based on 3000 hrs. and \$.08 pwr KWH.		105	15	35	25																																																																																																																																																			
		115	5	29	23																																																																																																																																																			
		125	0	17	21																																																																																																																																																			
		135	0	6	14																																																																																																																																																			
		145	0	0	4																																																																																																																																																			
		155	0	0	0																																																																																																																																																			
		165	0	0	0																																																																																																																																																			
		175	0	0	0																																																																																																																																																			
Photometric values based on test performed in compliance with LM-79.																																																																																																																																																								


Sealtight LED Luminaire

Energy data


Model	Initial Delivered Lumens at 25°C Ambient	Input Power	Lumens Per Watt
SLTLED234KDR-B	2,319	26W	89LPW
SLTLED354KDR-B	3,461	36W	96LPW
SLTLED434KDR-B	4,346	49W	89LPW
SLTLED514KDR-B	5,121	59W	87LPW

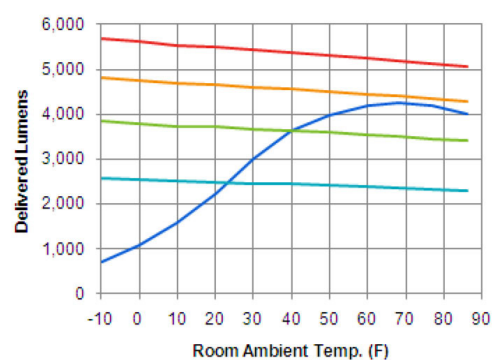

2-LAMPF32T8 SLTLED234KDR-B SLTLED354KDR-B
SLTLED434KDR-B SLTLED514KDR-B

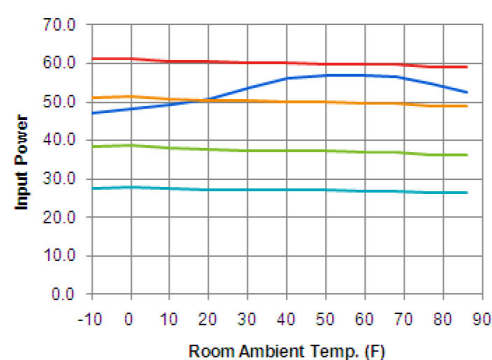

2-LAMPF32T8 SLTLED234KDR-B SLTLED354KDR-B
SLTLED434KDR-B SLTLED514KDR-B

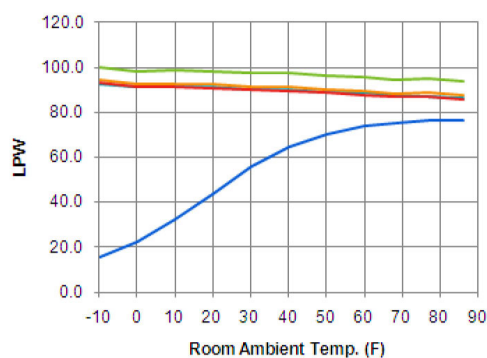

2-LAMPF32T8 SLTLED234KDR-B SLTLED354KDR-B
SLTLED434KDR-B SLTLED514KDR-B