

Specifier's Reference

Project

Type

Model No.

Comments

application

- Highly efficient, highly flexible recessed air handling luminaire with an upscale architectural appearance.
- Excellent visual comfort, ideal for modern high tech offices.
- Other applications include schools and retail environments.
- Controlled high-angle lighting eliminates "cave effect" without creating glare, for uniform lighting and high visual comfort.
- Lumen packages range from 2,400 to 4,000 initial delivered lumens, providing flexibility to optimize light levels for a specific application.
- High CRI source provides excellent color rendering with a CRI of 80.
- LEDs are an excellent source for use with controls since frequent switching does not affect the life of the light source.
- Specific models are available for Grid, Flange, Z-spline/Modular or Screw Slot ceiling systems.
- Designed for air supply/return through side slots in black reveal. See sheet 518-AH for air flow data.

construction/finish

- One piece die-formed embossed steel housing provides added rigidity, resists damage during shipment/handling.
- Black reveal around enclosure provides floating appearance and disguises air slots. White reveal is available.
- Integral T-bar clips are built into luminaire ends for quick and easy installation, no extra parts required.
- K.O. in luminaire ends for thru wiring or conduit entry in shallow plenums.

electrical

- Driver and LED boards are easily accessible from below without tools. LED boards are individually replaceable, if required, via plug-in connectors.
- 0-10V dimming is available for 3,100 lumen or 4,000 lumen models.
- Available emergency option provides 1600 delivered lumens in emergency mode (requires ballast enclosure on top of luminaire).
- Five year standard luminaire warranty including LED boards and driver. Emergency driver and batteries have a three year warranty in models so equipped.
- High efficiency LEDs have a minimum 50,000 hour rated life (L_{70}).
- ETL listed to UL standards, suitable for damp locations.

enclosures

- Captive one-piece enclosure hinges down as an assembly for easy access to internals if needed.
- Guide-post spring loaded latches allow easy opening and closing of the enclosure.
- Rounded acrylic diffusers are available with or without additional overlay to allow emphasis on efficiency or visual comfort depending on specific application requirements.

accessories

- **FKDP22** – Flange conversion kit 2'x2'.
- **FMA22** – 2'x2' "F" mounting frame for NEMA "F" mounting.

Green Choice: 2ATNGA24L840-2-D-UNV

2	AT	N	A	2				
Width 2 – 2'		Distribution N – Standard	Air Function A – Air Supply/Return	Length 2 – 2'			Voltage UNV – Universal Voltage, 120-277 volt 347	
	Family AT – Attune	Ceiling Type G – Grid F – Flange T – Screw Slot Z – Z Spline/Modular	Lumens 24L840 – 2400 delivered lumens, 80 CRI, 4000K 31L840 – 3100 delivered lumens, 80 CRI, 4000K 34L840 – 3400 delivered lumens, 80 CRI, 4000K 40L840 – 4000 delivered lumens, 80 CRI, 4000K	Diffusers D – Diffuse DO – Diffuse w/overlay			Options APC – Air pattern control blades ASC – Snap out air slot covers CM – Canadian Market CC – Custom Color F1 – 3/8" flex, 3 wire 18 gauge F2 – 3/8" flex, 4 wire 18 gauge GLR1 – Fusing, Fast Blow PAF – Housing painted after fabrication WR – White reveal DIM – 0-10V dimming driver (31L840 and 40L840 models only) EMLED16 – Integral emergency battery pack (1600 delivered lumens, requires ballast enclosure on top of luminaire)	

Accessories

- **FKDP22** – Flange conversion kit 2'x2'
- **FMA22** – 2'x2' "F" mounting frame for NEMA "F" mounting




energy data

Model	Initial Delivered Lumens at 25°C Ambient	Input Power	Lumens Per Watt
2ATNGA24L840-2-D	2432	31W	78LPW
2ATNGA24L840-2-DO	1894	31W	61LPW
2ATNGA31L840-2-D	3065	40W	77LPW
2ATNGA31L840-2-DO	2415	40W	60LPW
2ATNGA34L840-2-D	3423	45W	76LPW
2ATNGA34L840-2-DO	2697	46W	59LPW
2ATNGA40L840-2-D	3960	54W	73LPW
2ATNGA40L840-2-DO	3106	58W	54LPW


Fluorescent Configuration	Approx. Total Delivered Lumens	Attune Air LED Equivalent*	Fluorescent Configuration	Approx. Total Delivered Lumens	Attune Air LED Equivalent
2 lamp T8 31U6	3,500	2ATNGA34L840-2-D	2 lamp T8 17W	2,000	2ATNGA24L840-2-D
2 lamp T8 31U1	3,900	2ATNGA40L840-2-D	3 lamp T8 17W	2,850	2ATNGA31L840-2-D
3 lamp T8 31U1	5,500	n/a max. lumens would be 2ATNGA40L840-2-D	4 lamp T8 17W	3,650	2ATNGA34L840-2-D
2 lamp T12 40U6	2,800	2ATNGA31L840-2-D	2 lamp CF40	4,800	n/a, max. lumens would be 2ATNG40L840-2-D
3 lamp T12 40U3	3,800	2ATNGA40L840-2-D	3 lamp CF40	6,900	n/a, max. lumens would be 2ATNG40L840-2-D

*Attune Air LED equivalent will provide similar delivered lumens and light levels. Analysis to determine appropriate light levels for the space is highly recommended.

dimensions

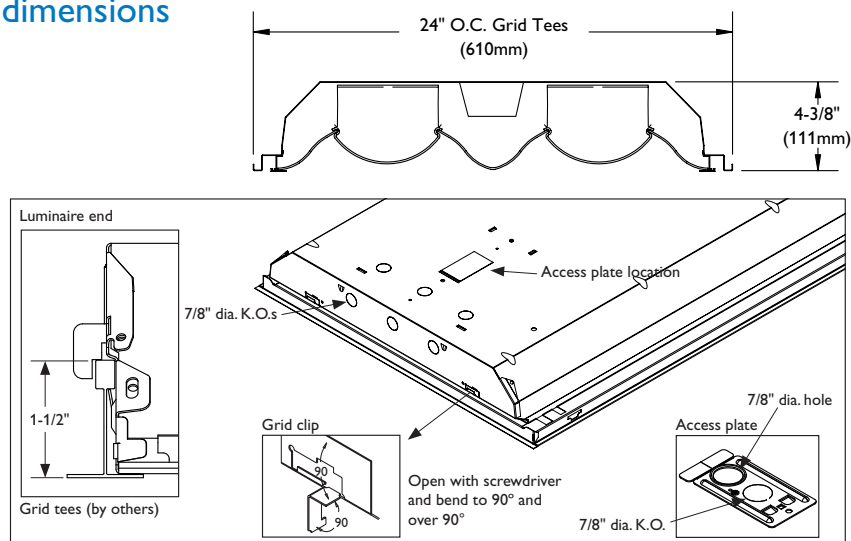

ceiling configuration

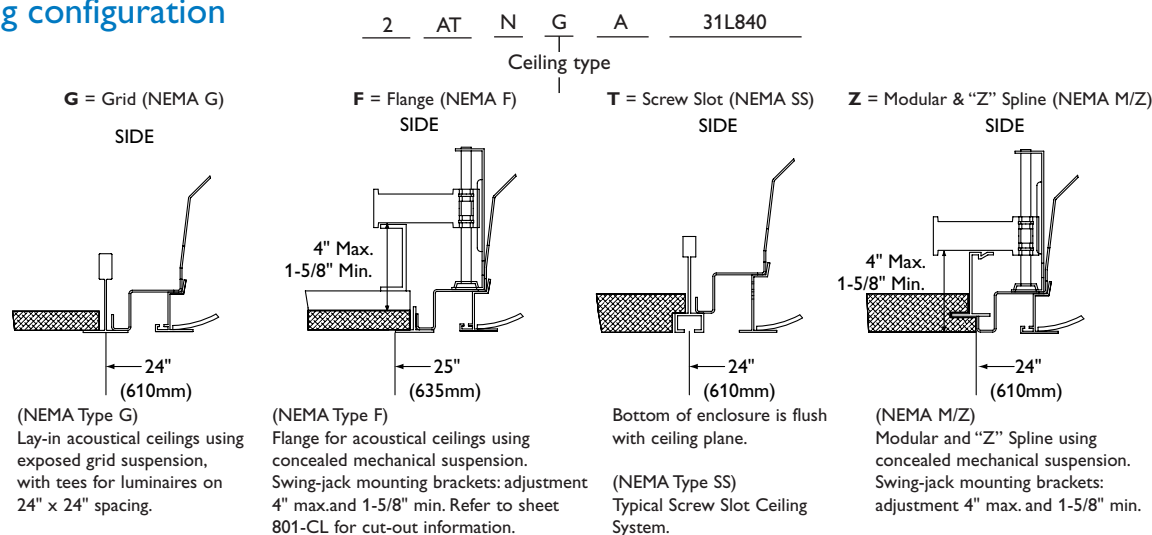

2x2 Attune Air LED, 2400 delivered lumens, diffuse

LER – 78

Catalog No.	2ATNGA24L840-2-D	Candlepower				Light Distribution			Average Luminance							
Test No.	29634D1	Angle	End	45	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross				
S/MH	1.2	0	983	983	983	0-30	751	30.9	45	2479	2771	2887				
Lamp Type	30WLED	5	975	980	982	0-40	1211	49.8	55	2102	2479	2582				
Lumens/Lamp	2432	10	959	965	967	0-60	2043	84.0	65	1706	2062	1954				
Input Watts	31	15	929	940	943	0-90	2433	100.0	75	1241	1443	1253				
		20	888	904	911								85	639	752	639
		25	835	860	869	Coefficients of Utilization										
		30	768	804	820	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)										
		35	701	740	765	pcc	80			70			50			
		40	620	670	698	pw	70	50	30	70	50	30	50	30		
		45	535	598	623	RCR										
		50	454	515	544	0	118	118	118	115	115	115	111	111		
		55	368	434	452	1	110	105	101	107	103	98	98	95		
		60	289	352	345	2	100	93	85	97	91	84	86	81		
		65	220	266	252	3	92	81	73	90	80	72	77	70		
		70	154	181	167	4	83	72	65	81	71	64	68	61		
		75	98	114	99	5	78	66	56	76	64	56	61	55		
		80	54	58	47	6	71	58	51	69	57	50	56	48		
		85	17	20	17	7	67	54	45	65	53	45	51	44		

2x2 Attune Air LED, 3100 delivered lumens, diffuse

LER – 77

Catalog No.	2ATNGA31L840-2-D	Candlepower				Light Distribution			Average Luminance					
Test No.	29633D1	Angle	End	45	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross		
S/MH	1.2	0	1239	1239	1239	0-30	946	30.9	45	3132	3489	3637		
Lamp Type	38WLED	5	1229	1235	1236	0-40	1527	49.8	55	2679	3125	3205		
Lumens/Lamp	3065	10	1209	1218	1217	0-60	2574	84.0	65	2132	2589	2458		
Input Watts	40	15	1173	1184	1188	0-90	3065	100.0	75	1570	1772	1595		
		20	1119	1139	1148				85	865	940	902		
		25	1051	1084	1095	Coefficients of Utilization								
		30	972	1013	1034	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)								
		35	882	937	961	pcc	80			70			50	
		40	784	849	879	pw	70	50	30	70	50	30	50	30
		45	676	753	785	RCR								
		50	573	654	686	0	118	118	118	115	115	115	111	111
		55	469	547	561	1	110	105	101	107	103	98	98	95
		60	368	444	438	2	100	93	85	97	91	84	86	81
		65	275	334	317	3	92	81	73	90	80	72	77	70
		70	195	228	211	4	83	72	65	81	71	64	68	61
		75	124	140	126	5	78	66	56	76	64	56	61	55
		80	68	74	63	6	71	58	51	69	57	50	56	48
		85	23	25	24	7	67	54	45	65	53	45	52	44
						8	61	48	40	60	48	40	46	40
						9	57	45	36	56	45	36	44	36
						10	55	41	34	53	40	34	40	33
Comparative yearly lighting energy cost per 1000 lumens – \$3.12 based on 3000 hrs. and \$.08 pwr KWH.														
The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.														
Photometric values based on test performed in compliance with LM-79.														

2x2 Attune Air LED, 3400 delivered lumens, diffuse

LER – 76

Catalog No.	2ATNGA34L840-2-D	Candlepower				Light Distribution			Average Luminance					
Test No.	29636D1	Angle	End	45	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross		
S/MH	1.2	0	1385	1385	1385	0-30	1057	30.9	45	3526	3874	4078		
Lamp Type	45WLED	5	1374	1380	1382	0-40	1705	49.8	55	2942	3485	3627		
Lumens/Lamp	3423	10	1350	1360	1362	0-60	2874	84.0	65	2365	2900	2714		
Input Watts	45	15	1310	1324	1329	0-90	3423	100.0	75	1772	2064	1848		
		20	1249	1272	1285				85	940	1015	977		
		25	1172	1211	1227	Coefficients of Utilization								
		30	1085	1132	1159	EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)								
		35	981	1043	1074	pcc	80			70			50	
		40	870	944	984	pw	70	50	30	70	50	30	50	30
		45	761	836	880	RCR								
		50	632	725	767	0	118	118	118	115	115	115	111	111
		55	515	610	635	1	110	105	101	107	103	98	98	95
		60	410	495	496	2	100	93	85	97	91	84	86	81
		65	305	374	350	3	92	81	73	90	80	72	77	70
		70	217	256	240	4	83	72	65	81	71	64	68	61
		75	140	163	146	5	78	66	56	76	64	56	61	55
		80	75	84	71	6	71	58	51	69	57	50	56	48
		85	25	27	26	7	67	54	45	65	53	45	51	44
						8	61	48	40	60	48	40	46	40
						9	57	45	36	56	45	36	44	36
						10	55	41	34	53	40	34	40	33
Comparative yearly lighting energy cost per 1000 lumens – \$3.16 based on 3000 hrs. and \$.08 pwr KWH.														
The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.														
Photometric values based on test performed in compliance with LM-79.														

photometry

2x2 Attune Air LED, 4000 delivered lumens, diffuse

LER – 73

Catalog No.		Candlepower				Light Distribution			Average Luminance			
Test No.		Angle	End	45	Cross	Degrees	Lumens	% Luminaire	Angle	End	45°	Cross
2ATNGA40L840-2-D	29635D1	0	1603	1603	1603	0-30	1224	30.9	45	4022	4481	4740
S/MH	1.2	5	1590	1598	1601	0-40	1974	49.8	55	3439	4010	4210
Lamp Type	53WLED	10	1562	1573	1579	0-60	3324	83.9	65	2783	3342	3171
Lumens/Lamp	3960	15	1514	1533	1539	0-90	3960	100.0	75	2013	2367	2051
Input Watts	54	20	1444	1472	1487				85	1128	1128	1090
		25	1357	1398	1420							
		30	1254	1304	1339							
		35	1136	1206	1247							
		40	1014	1087	1140							
		45	868	967	1023							
		50	735	837	888							
		55	602	702	737							
		60	469	566	573							
		65	359	431	409							
		70	253	299	272							
		75	159	187	162							
		80	89	99	81							
		85	30	30	29							

Coefficients of Utilization												
EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)												
pcc	80				70				50			
pw	70	50	30		70	50	30		70	50	30	
RCR												
0	118	118	118		115	115	115		111	111		
1	110	105	101		107	103	98		98	95		
2	100	93	85		97	91	84		86	81		
3	92	81	73		90	80	72		77	70		
4	83	72	65		81	71	64		68	61		
5	78	66	56		76	64	56		61	55		
6	71	58	51		69	57	50		56	48		
7	67	54	45		65	53	45		52	44		
8	61	48	40		60	48	40		46	40		
9	57	45	36		56	45	36		44	36		
10	55	41	34		53	40	34		40	33		

Comparative yearly lighting energy cost per 1000 lumens – **\$3.29** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Photometric values based on test performed in compliance with LM-79.

Use the following photometric tests for applications with overlays:

Test Number	Catalog Number
29651D1	2ATNGA24L840-2-DO
29644D1	2ATNGA31L840-2-DO
29645D1	2ATNGA34L840-2-DO
29646D1	2ATNGA40L840-2-DO



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
 Specifications are subject to change without notice.
www.philips.com/luminaires

0018-AR 04/13

Philips Lighting Company
 200 Franklin Square Drive
 Somerset, NJ 08873
 Phone: 855-486-2216

Philips Lighting Company
 281 Hillmount Road
 Markham ON, Canada L6C 2S3
 Phone: 800-668-9008