

2 or 3 Lamp
T8, T5, T5HO, or CF TT5

APPLICATION

- Architectural recessed direct/indirect lighting for glare free illumination.
- Combines a low profile reflector with a sleek basket shape for a modern appearance.
- Shallow housing requires only 3-5/8" of plenum space, great for shallow plenum applications.
- Models with emergency ballast or multiple ballasts require 5-1/4" of plenum space.
- Basket extends less than 1-1/2" below the ceiling plane for CF/T5 models and less than 2-1/2" below the ceiling for T8 models.
- Provides soft, uniform lighting without hot spots or dark areas.
- Housing edge design locates the bottom of the reflector flush with the ceiling plane in standard grid (NEMA G) or screw slot (NEMA SS) applications.
- NOT suitable for flush mounting in narrow face grid (NEMA NFG) applications.
- For applications where plenum depth is limited.
- T5/T5HO and CF models suitable for row mounting.
- T8 models not suitable for row mounting.

CONSTRUCTION/FINISH

- Top reflector and end panels are formed together with no gaps.
- No visible welding, screws, latches, springs, hooks, rivets or plastic supports.
- Reflector features soft, high reflectance matte white finish that is applied after fabrication.
- Easy ballast access through lamp compartment.
- Optional hold down clips available. (Order separately: cat # AVHD)

ELECTRICAL

- Class P, HPF ballasts comply with © Federal Ballast Law (Public Law 100-357,1988).
- UL listed for damp locations. C.S.A. certified optional.
- Self-contained fluorescent emergency power pack can be incorporated in some models, UL listed for dry locations.

ENCLOSURES

- Micro-perforated mesh lamp shield provides soft awareness of light source.
- Swing down lamp shield for easy relamping.
- Soft white overlay on inside of micro-perforated mesh conceals lamp image and balances reflected and direct light.

CATALOG NUMBER

2	AVD	G			PMW		
WIDTH 2 - 2'		CEILING TYPE G - Grid		LAMP TYPE/WATTAGE 14 - 14wT5 (22") 17 - 17wT8 (24") 24HO - 24wT5HO (22") CF40 - 40wTT5 (24") CF50 - 50wTT5 (24") CF55 - 55wTT5 (24")	VOLTAGE 120 277 347 UNV - Universal voltage, 120-277 volt		
FIXTURE FAMILY AVD - Ariosso Mid-Depth Semi-Recessed		NO. OF LAMPS 2 3 (T5/T5HO only)		SHIELDING PMW - Perforated Metal with White Overlay			

OPTIONS

CM - Canadian Market
1/2 - One 2-lamp ballast (electronic or non-standard)
1/21 - 2-lamp & 1-lamp ballasts (electronic or non-standard)
EB - Electronic ballast, <20% THD
EB10I - CF40 Electronic ballast, instant start, <10% THD
EB10R - Electronic ballast, program rapid start, <10% THD
EBD - Electronic dimming ballast
E1 - DEB-1 emerg. ballast, T8 lamps, 350-450 lumens
E7 - DEB-7 emerg. ballast, T8 lamps, 600-700 lumens
E5 - DEB-5 emerg. ballast, T8 lamps 1100-1400 lumens
E7LP - DEB-7LP emerg. ballast T5/T5HO, 430-700 lumens
E6 - DEB-6LP emerg. ballast, T5/T5HO lamps, 750-1325 lumens
F1 - Installed flex, 3/8" diameter, 18 gauge, 3 wire, 6'
F2 - Installed flex, 3/8" diameter, 18 gauge, 4 wire, 6'
GLR# - Fusing, fast blow (# = number of ballasts)
LPT835 - Installed lamps, 80+ CRI, 3500K




Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

JOB INFORMATION

ARIOSO MID-DEPTH SEMI-RECESSED 2' x 2'

0407-AR

DIMENSIONS

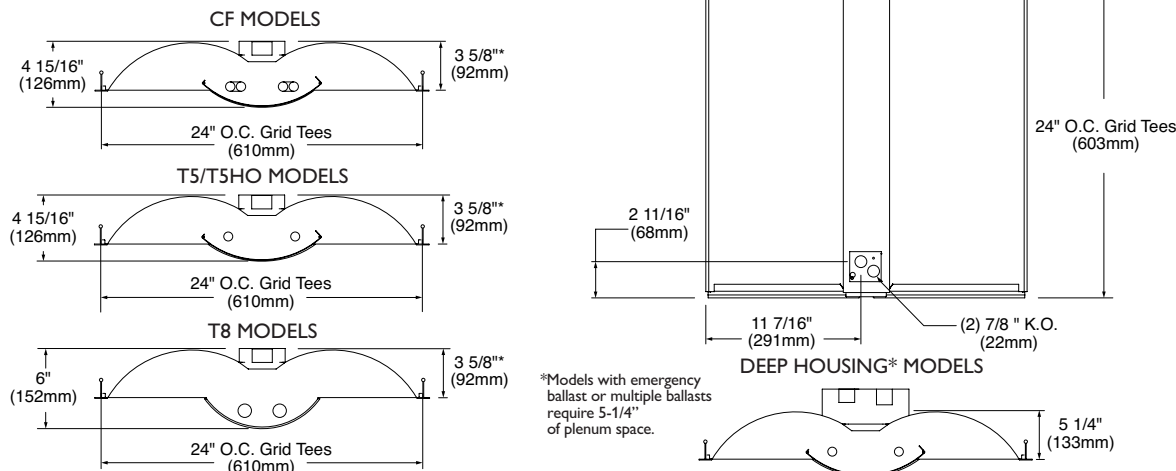

PHOTOMETRIC DATA

CATALOG # 2AVDG2CF40-PMW-1/2-EB LAMPS = 40wTTS INPUT WATTS = 70
TEST #27590 S/MH= 1.3 BALLAST = ELECTRONIC BALLAST FACTOR = .88

LER = 52

COMPARATIVE YEARLY LIGHTING ENERGY COST PER 1000 LUMENS = \$4.62 BASED ON 3000 HRS. AND \$.08 PER KWH.

FIXTURE EFFICIENCY= 65.6%

CANDLEPOWER				
Angle	End	45	Cross	
0	1364	1364	1364	
5	1362	1355	1356	
10	1340	1338	1343	
15	1306	1309	1323	
20	1258	1272	1293	
25	1200	1224	1256	
30	1130	1169	1210	
35	1046	1099	1154	
40	955	1026	1097	
45	856	947	1031	
50	748	861	959	
55	630	772	879	
60	512	678	787	
65	396	577	676	
70	293	466	561	
75	200	345	414	
80	117	211	174	
85	47	62	82	

MAINTAINED ILLUMINATION TABLE- Square Feet/ Fixture*						
80-50-20 Reflectances (Ceiling-Wall-Floor) - LLF = 0.75 3150 Lumens/Lamp very clean - Room width divided by room height = 5 or more, 2 or 1						
Fixture Size & # of Lamps	Room Width Room Height =	Approx. Area (sq. ft.) per Fixture				
		10 ft-c	30 ft-c	50 ft-c	70 ft-c	100 ft-c
2' X 2' 2 Lamp CF40	5 2 1	— 106 51	64 43 31	46 30 —	32 — —	—

*Observe Fixture S/MH Requirements for Specific Applications

AVERAGE LUMINANCE CD/SQ.M WITH 3150 LUMEN LAMPS				
ANGLE	END	45°	CROSS	
45	3258	3604	3924	
55	2956	3622	4124	
65	2521	3674	4304	
75	2079	3587	4304	
85	1451	1914	2532	

TYPICAL V.C.P.'s				
Room Size	Mounting Height			
	Lengthwise	Crosswise		
	8.5	10	8.5	10
30x30	44	48	37	41
40x40	42	44	37	38
60x30	46	49	42	45
60x60	43	42	37	38
100x100	45	44	39	39

COEFFICIENT OF UTILIZATION												
pfc pcc pw RCR	20				70				50			
	80	70	50	30	70	50	30		50	30		
0	78	78	78		76	76	76		72	72		
1	70	68	65		68	66	64		63	60		
2	64	58	54		63	56	53		55	52		
3	57	51	46		56	50	45		47	44		
4	53	45	39		52	44	39		42	38		
5	48	40	34		47	40	34		38	33		
6	45	35	29		44	35	29		34	28		
7	41	33	27		40	32	27		30	26		
8	39	29	23		38	28	23		28	23		
9	35	27	22		34	27	22		26	20		
10	34	25	20		33	25	20		23	20		

LIGHT DISTRIBUTION			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	1064	16.9	25.7
0-40	1753	27.8	42.4
0-60	3162	50.2	76.5
0-90	4134	65.6	100.0

LLF = .75 LLF = LIGHT LOSS FACTOR LLF = LDD X LLD X BF LDD = VERY CLEAN 0.94 CLEAN 0.90
LLD = 0.90 @ 40% RATED LAMP LIFE BF = .88 ELECTRONIC BALLAST & 40wTTS LAMP (RELAMP AT 70% LAMP LIFE)

PHOTOMETRIC DATA

CATALOG # 2AVDG317-PMW-1/3-EB LAMPS = F17T8 INPUT WATTS = 47
TEST #27895 S/MH= 1.3 BALLAST = ELECTRONIC BALLAST FACTOR = .93

LER = 53

COMPARATIVE YEARLY LIGHTING ENERGY COST PER 1000 LUMENS = \$4.53 BASED ON 3000 HRS. AND \$.08 PER KWH.

FIXTURE EFFICIENCY= 67.2%

CANDLEPOWER				
Angle	End	45	Cross	
0	875	875	875	
5	869	871	871	
10	856	861	864	
15	833	843	850	
20	804	817	831	
25	765	785	806	
30	720	749	780	
35	665	707	748	
40	609	662	712	
45	545	611	672	
50	471	557	621	
55	396	498	564	
60	320	435	514	
65	247	368	457	
70	182	307	380	
75	124	237	256	
80	70	131	124	
85	27	54	71	

MAINTAINED ILLUMINATION TABLE- Square Feet/ Fixture*						
80-50-20 Reflectances (Ceiling-Wall-Floor) - LLF = 0.81 1325 Lumens/Lamp very clean - Room width divided by room height = 5 or more, 2 or 1						
Fixture Size & # of Lamps	Room Width Room Height =	Approx. Area (sq. ft.) per Fixture				
		10 ft-c	30 ft-c	50 ft-c	70 ft-c	100 ft-c
2' X 2' 3 Lamp T8	5 2 1	— 149 108	75 50 36	45 — —	32 — —	—

*Observe Fixture S/MH Requirements for Specific Applications

AVERAGE LUMINANCE CD/SQ.M WITH 1325 LUMEN LAMPS				
ANGLE	END	45°	CROSS	
45	1878	2027	2316	
55	1617	1930	2303	
65	1286	1781	2379	
75	928	1590	1917	
85	381	621	1001	

TYPICAL V.C.P.'s				
Room Size	Mounting Height			
	Lengthwise	Crosswise		
	8.5	10	8.5	10
30x30	58	61	53	56
40x40	57	58	54	55
60x30	61	63	58	60
60x60	57	57	54	54
100x100	60	59	56	56

COEFFICIENT OF UTILIZATION													
pfc	20					70					50		
pcc	80	70	50	30		70	50	30		50	30		
pw	70	50	30			70	50	30		50	30		
RCR													
0	80	80	80			78	78	78		75	75		
1	72	68	66			70	68	65		65	63		
2	66	59	55			64	58	54		56	53		
3	59	52	46			57	51	46		48	45		
4	55	46	40			53	45	40		44	39		
5	50	40	34			48	40	34		39	34		
6	46	36	30			45	35	30		34	29		
7	42	34	27			41	33	27		32	27		
8	40	30	25			39	29	25		28	23		
9	36	28	22			35	28	22		27	22		
10	34	26	20			34	25	20		25	20		

LIGHT DISTRIBUTION			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	683	17.2	25.6
0-40	1126	28.3	42.1
0-60	2032	51.1	76.0
0-90	2671	67.2	100.0

LLF = .81 LLF = LIGHT LOSS FACTOR LLF = LDD X LLD X BF LDD = VERY CLEAN 0.94 CLEAN 0.90
LLD = 0.93 @ 40% RATED LAMP LIFE BF = .93 ELECTRONIC BALLAST & T8 LAMP (RELAMP AT 70% LAMP LIFE)



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008