

1', 2', or 4'  
2 or 4 Lamp  
T5, T5HO, T8, or CF TT5  
Wall/Ceiling

**APPLICATION**

- Architectural surface mounted luminaire for direct/indirect lighting for glare-free illumination.
- Can be wall or ceiling mounted.
- One-piece body for easy installation.
- Ideal for lighting corridors, hallways, or for adding architectural detail to bare walls.
- 4" deep, meets ADA when wall mounted.

**CONSTRUCTION/FINISH**

- No visible welding, screws, latches, springs, hooks, rivets or plastic supports.
- Soft white baked enamel finish.
- Easy ballast access through removable back reflector.
- Can be mounted to 4" octagonal junction box or surface mounted.


**ELECTRICAL**

- Not suitable for through wiring.
- Class P, HPF ballasts comply with © Federal Ballast Law (Public Law 100-357,1988).
- UL listed for damp locations. C.S.A. certified optional.
- Self-contained fluorescent emergency power pack can be incorporated.

**ENCLOSURES**

- Micro-perforated mesh lamp shield provides soft awareness of light source.
- Swing out lamp shield for easy relamping.
- Soft white overlay on inside of micro-perforated mesh conceals lamp image and balances reflected and direct light.

**CATALOG NUMBER**

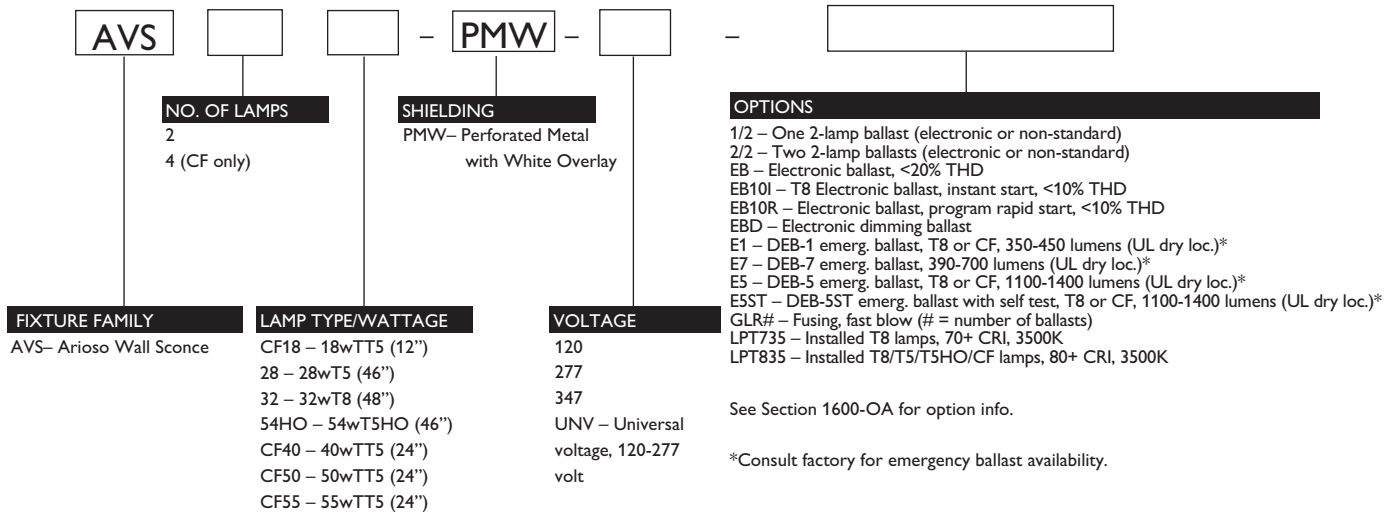

Size	Lamps/ Cross Section	Lamps/ Luminaire	Lamp Type
1'	2	2	CF18
2'	2	2	CF40, CF50, CF55
4'	2	2	28, 32, 54HO
	2	4	CF40, CF50, CF55


**Hg** Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)

**JOB INFORMATION**

# ARIOSO SURFACE SCONCE

0465-AR

## DIMENSIONS

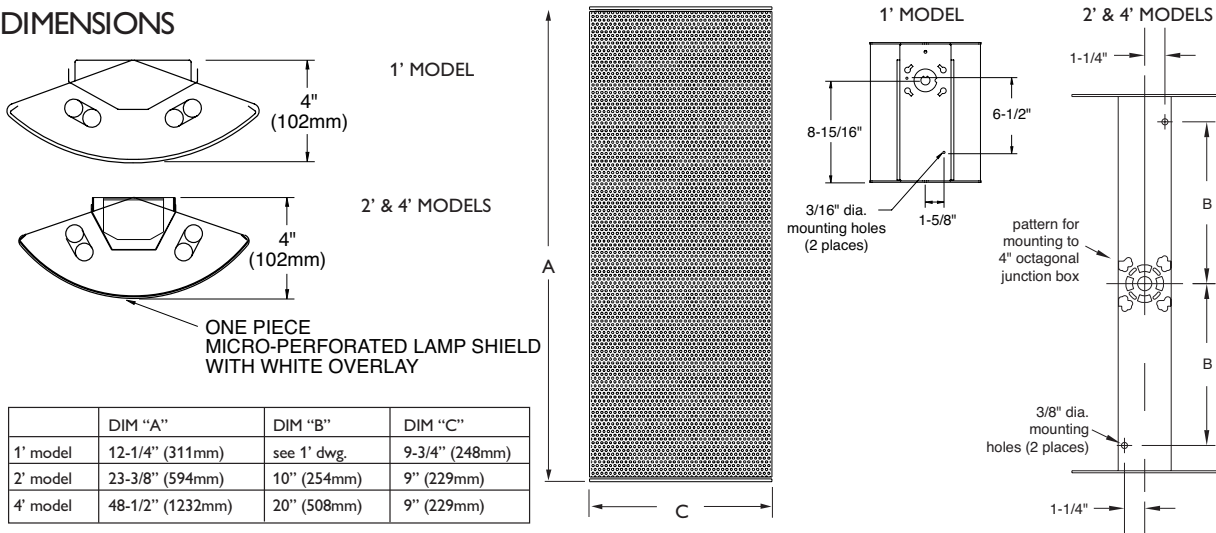

## PHOTOMETRIC DATA

CATALOG # AVS2CF40-PMW-1/2-EB  
TEST #21342

LAMPS = 40wTTS  
BALLAST = ELECTRONIC BALLAST FACTOR = .88

INPUT WATTS = 70

LER = 65

COMPARATIVE YEARLY LIGHTING ENERGY COST PER 1000 LUMENS = \$3.69 BASED ON 3000 HRS. AND \$.08 PER KWH.

FIXTURE EFFICIENCY = 81.5%

CANDLEPOWER			
Angle	End	45	Cross
0	323	323	323
5	299	280	270
15	289	179	178
25	262	188	219
35	221	205	277
45	170	227	344
55	116	247	411
65	64	268	471
75	18	286	514
85	3	296	538
95	0	290	535
105	18	290	525
115	59	282	495
125	98	265	443
135	141	246	381
145	179	219	308
155	210	200	243
165	236	185	197
175	252	157	185

AVERAGE LUMINANCE CD/SQ.M WITH 3150 LUMEN LAMPS			
ANGLE	END	45°	CROSS
45	2740	2474	2563
55	2057	2823	1898
65	1306	3189	1142
75	448	3537	324
85	100	3883	0

COEFFICIENT OF UTILIZATION						
pfc	20		70		50	
	70	50	30	70	50	30
pcc						
pw						
RCR						
0	88	88	88	81	81	68
1	76	70	66	69	65	54
2	68	59	53	61	55	45
3	60	51	44	56	46	39
4	55	45	36	50	40	34
5	51	40	32	46	35	29
6	46	34	28	41	32	26
7	42	32	23	39	28	23
8	40	28	20	35	26	20
9	36	26	19	34	23	17
10	34	23	17	30	22	16

LIGHT DISTRIBUTION			
DEGREES LUMENS	% LAMP	% FIXTURE	
0-30	320	5.1	6.2
0-40	575	9.1	11.2
0-60	1253	19.9	24.4
0-90	2675	42.5	52.1
90-180	2458	39.0	47.9
0-180	5134	81.5	100.0

## PHOTOMETRIC DATA

CATALOG # AVS232-PMW-1/2-EB  
TEST #23838

LAMPS = F32T8  
BALLAST = ELECTRONIC BALLAST FACTOR = .88

INPUT WATTS = 59

LER = 50

COMPARATIVE YEARLY LIGHTING ENERGY COST PER 1000 LUMENS = \$4.80 BASED ON 3000 HRS. AND \$.08 PER KWH.

FIXTURE EFFICIENCY = 59.1%

CANDLEPOWER			
Angle	End	45	Cross
0	126	126	126
5	126	131	131
15	121	141	165
25	107	150	209
35	89	158	269
45	71	176	337
55	51	190	396
65	32	203	447
75	20	212	480
85	12	212	489
95	13	206	480
105	28	185	448
115	34	163	409
125	46	147	353
135	62	133	282
145	78	125	214
155	89	119	169
165	99	111	131
175	105	103	100

AVERAGE LUMINANCE CD/SQ.M WITH 2850 LUMEN LAMPS			
ANGLE	END	45°	CROSS
45	1399	13266	1621
55	1501	18691	1436
65	1603	27240	1223
75	1683	44978	1248
85	1728	130603	2223

COEFFICIENT OF UTILIZATION						
pfc	20		70		50	
	70	50	30	70	50	30
pcc						
pw						
RCR						
0	64	64	64	58	58	51
1	55	51	46	51	46	39
2	48	42	38	45	39	33
3	44	35	30	40	33	28
4	39	32	26	35	28	23
5	35	28	22	33	25	20
6	33	23	19	29	22	17
7	29	22	16	28	20	14
8	28	20	14	26	17	11
9	26	17	13	23	16	11
10	23	16	11	22	14	11

LIGHT DISTRIBUTION			
DEGREES LUMENS	% LAMP	% FIXTURE	
0-30	139	2.4	4.1
0-40	280	4.9	8.3
0-60	770	13.5	22.9
0-90	1840	32.3	54.6
90-180	1529	26.8	45.4
0-180	3369	59.1	100.0



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.  
Specifications are subject to change without notice.  
www.philips.com/luminaires

Philips Lighting Company  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008