
JOB NAME		

# **BIS-RLM SERIES - ELENA**

50-175 watt Metal Halide 35-150 watt High Pressure Sodium 26-60 watt Compact Fluorescent

18 watt LED


The RLM Series offers unique designs and old standards to enhance the aesthetic appeal of restaurants, retail stores, businesses, and other areas where decorative reflector units are desired.



#### ORDERING MATRIX

**TYPE** 

SAMPLE CATALOG NUMBER: BIS175MXX-ELE-GEO-AL

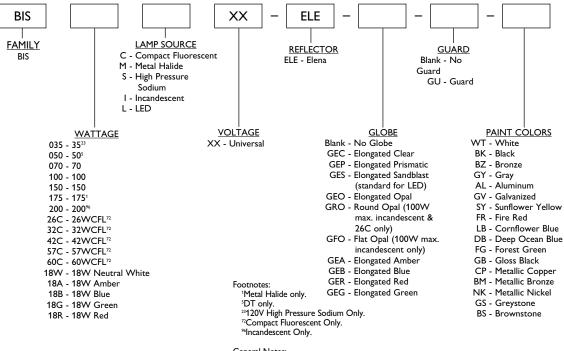

### ACCESSORIES (order separately)

For additional descriptions of accessories, refer to sheet numbers DC-47900 and DC-47910.

## General Notes:


All options are factory installed.

Medium base lamp only.
GX24q lamp base for 26-57W compact fluorescent.
2G8 lamp base for 60W compact fluorescent.

All accessories are field installed.

Warning: Refer to and follow the lamp manufacturer's warnings and instructions.


## **DIMENSIONS**



© 2013 Koninklijke Philips Electronics N.V. All rights reserved. Specifications are subject to change without notice.




#### **PHOTOMETRICS**



BIS100IXX-ELE-GEP TEST NUMBER: 26246 LAMP: 100W A19 LUMENS: 1,680


MOUNTING HEIGHT: 12 FEET



BIS175MXX-ELE-GEP TEST NUMBER: 26249 LAMP: 175W MH, COATED


LUMENS: 15,000

MOUNTING HEIGHT: 12 FEET



BIS42CCXX-ELE-GEP TEST NUMBER: 26293 LAMP: 42W CFL LUMENS: 3,200

MOUNTING HEIGHT: 12 FEET





BIS18WLXX-ELE-GES TEST NUMBER: 27584


LAMP: 18W LED NEUTRAL WHITE


LUMENS: 700

MOUNTING HEIGHT: 12 FEET










UNITS SHOWN IN TERMS OF MOUNTING HEIGHT INITIAL FOOTCANDLES SHOWN

## PRODUCT FEATURES

UL 1598 Listed for wet location and 25°C ambient for all lamp wattages listed.

- 1. 1/2" NPT threaded hub for easy, positive mounting.
- 2. Die cast aluminum pendant mount assembly with polyester powder finish.
- 3. Spun aluminum reflector assembly with polyester powder finish.
- 4. Optional heat and shock resistant glass optical.
- 5. Optional die cast aluminum guard with polyester powder finish. (Not shown)

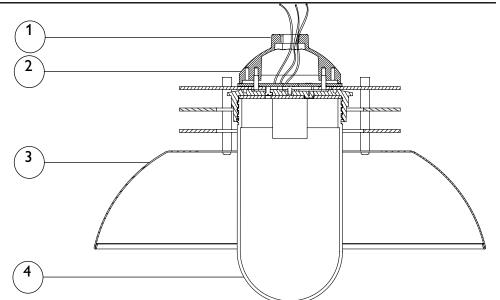

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Conta



contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www. lamprecycle.org



@ 2013 Koninklijke Philips Electronics N.V. All rights reserved. Specifications are subject to change without notice.

DC-47010 03/13

Philips Lighting Company 200 Franklin Square Drive Somerset, NJ 08873 Phone: 855-486-2216

www.philips.com/luminaires

Philips Lighting Company 281 Hillmount Road Markham ON, Canada L6C 2S3 Phone: 800-668-9008

www.philips.com/luminaires