

PHILIPS Stonco

Special Purpose

Defiant II

Vandal resistant
15" round, CFL



Project: _____
Location: _____
Cat.No: _____
Type: _____
Quantity: _____
Notes: _____

Philips Stonco Defiant II vandal resistant wall mount is a specification grade luminaire designed for durability and performance to withstand today's toughest environments. It is ideal for schools, parking garages, office complexes, or any application prone to vandalism.

Ordering guide

Example: DFII-FP-CL-232TRT-E-UNV-BK

Series	Mounting Plate	Lens	Lamps ²		Front Accents	Voltage	Finish	Options
<div>DFII</div> -	<div></div> -	<div></div> -	<div></div> -		<div></div> -	<div></div> -	<div></div> -	<div></div>
DFII Decorative Wall Mount	FP Flat Plate DBR¹ Deep back box, recessed	CL Clear WO White opal	<u>Flat Plate or Deep Box</u> 13Q 1-13W Quad 213Q 2-13W Quad 26Q 1-26W Quad 226Q 2-26W Quad 26TRT 1-26W Triple Tube 32TRT 1-32W Triple Tube 42TRT 1-42W Triple Tube 57TRT 1-57W Triple Tube 226TRT 2-26W Triple Tube 232TRT 2-32W Triple Tube 242TRT 2-42W Triple Tube	<u>Deep Box Only</u> 257TRT 2-57W Triple Tube 326Q 3-26W Quad 326TRT 3-26W Triple Tube 332TRT 3-32W Triple Tube 342TRT 3-42W Triple Tube	O Open E Eyelid C Cross ES Eyelid slots	UNV 120-277V	BK Black BZ Dark Bronze WT White	EMG³ Emergency ballast GLR Fusing LP Lamp included

1. DBR housing not suitable for concrete-pour applications
2. 13W lamp is G24Q. All other CFL lamps are GX24Q base.
3. Specify voltage



DFII Defiant II vandal resistant wall mount

15" round, CFL

Standards

- ETL (US/Canada) Wet Location.
- ADA compliant.

Construction/Finish

- Marine grade die cast aluminum shallow backplate or semi-recessed housing.
- One piece injection molded, UV-stabilized polycarbonate guards with color molded throughout are available in four styles: Open, Cross, Eyelid, and Slotted Eyelid. Guards are permanently mounted to fixture.
- UV-stabilized, polycarbonate locking ring holds lens to back mounting plate or deep box. Locking ring has keyed slots for correct alignment.
- Symmetric white reflector.
- Stainless steel center-pin reject Allen Head fasteners standard.
- Housing finish is textured black polyester powder coat standard. White and Dark Bronze also available

Lens

- UV-stabilized, polycarbonate injection molded lens, 0.180" minimum thickness available in clear or translucent white, both with radial prisms to provide superior illumination.



Electrical

- Ballast is high reactance, high power factor, with starting temperature of -20°F (-30°C) for metal halide, and -40°F for high pressure sodium.

Installation

- Luminaire may be wall mounted. Units up to 2-32W can be ceiling mounted. Four point mounting must be used for maximum vandal resistance.

Dimensions

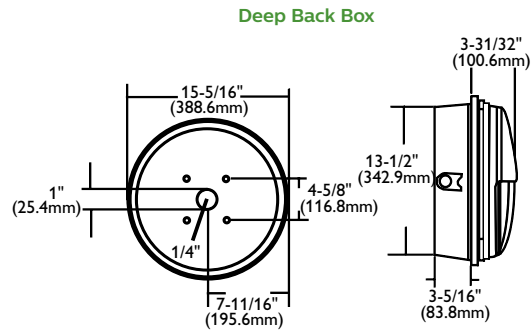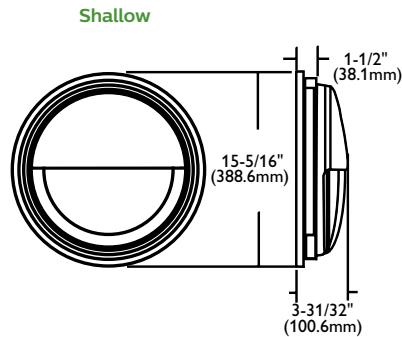

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

