standards

- ETL (US/Canada) Wet location rated luminaires
- IP65 rated.

construction/finish

- Pressure diecast marine grade aluminum housing with side and rear conduit entry drill out locations.
- Specular aluminum reflector.
- Injection molded UV stabilized impact-resistant polycolycabonate lens with precision engineered clear linear prism.
- Painted top surface with clear area provided for photocell.
- · Concealed and removable hinge.
- · Black finish.

VRD-4010

Decorative

DF Series42W Triple Tube, 70-100W UVS,
70-100W HPS and MH





Specifier's Reference


Project

Туре

Model No.

Comments

Green Choice: DF42TRT-UNV

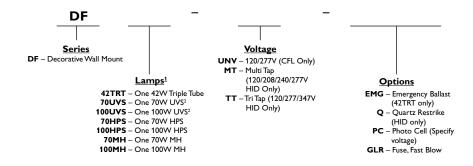

Footnotes


¹Lamps supplied by others. ²UVS is Ultra-Violet Sheild which is special coating on lamp to block UV rays.

General Notes

Consult factory for additional configurations. HID lamps are ED17 and medium base.

dimensions







Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "HG". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org



© 2013 Koninklijke Philips Electronics N.V. All rights reserved. Specifications are subject to change without notice. www.philips.com/luminaires

Philips Lighting Company 200 Franklin Square Drive Somerset, NJ 08873 Phone: 855-486-2216 Philips Lighting Company 281 Hillmount Road Markham ON, Canada L6C 2S3 Phone: 800-668-9008