

Type No. _____

Catalog No. _____

Job. Name _____

ELG CosmoPolis / MasterColor Elite

HID Series

Element Enclosed Glass High Bay, 60-315 watt

APPLICATIONS

- Applications include large and small retail facilities, lobbies, conference rooms, auditoriums and other commercial and light industrial spaces.

CONSTRUCTION

- Cylindrical ballast housing features a tool-less wiring access door for simple installation and maintenance. Single baffle is standard. Dual or Tri-Baffle option may be specified. Ballast housing has an Ultra-Clad polyester powder coating, electrostatically applied and oven cured. Standard colors and five new metallic finishes available. Custom RAL colors may be specified. Custom designed multi-color luminaire may be specified.

OPTICS

- The prismatic reflector of borosilicate glass adds an uplight component to give fill light on ceiling surfaces, improving the quality of the lighting environment. The ELG CosmoPolis / MasterColor Elite series is available as an enclosed unit in Narrow or Wide distribution. Clear or diffuse tempered glass lens.

ELECTRICAL



- The BL option provides Bi-Level (Hi / Low) dimming to 50% power. The AD option provides Analog (full range) dimming to 50% power. Both ballasts include built-in end of life, 60,000 hour life and overheating protections as well as open and short circuit lamp protections. CosmoPolis (60W / 90W / 140W) systems are suitable for operation in an ambient temperature range of -20°C (-4°F) to 40°C (104°F). MasterColor Elite (210W / 315W) systems are suitable for operation in an ambient temperature range of -30°C (-22°F) to 40°C (104°F). The digitally microprocessor-controlled ignitor in the CosmoPolis and MasterColor Elite ballast gear virtually eliminates lamp electrode wear and arctube wall blackening.

MOUNTING

- Standard pendant mounting features a cast aluminum nut and hub to provide quick, positive mounting to 3/4" NPT or NPSM conduit.

WARRANTY/LISTINGS

- Standard 5 Year Limited Warranty. UL/cUL Listed luminaire, UL 1598, rated, suitable for damp locations. The quality systems of this facility have been Registered by UL to the ISO 9000 Series Standards.

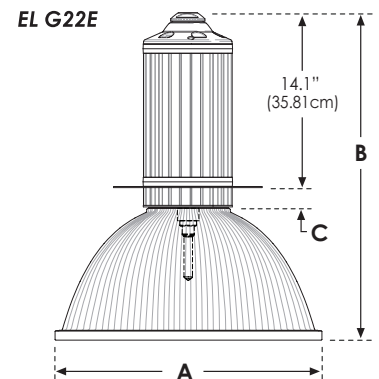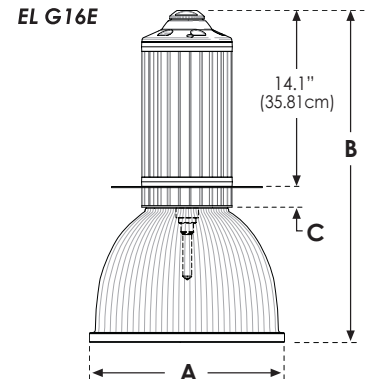

| | A | B | C |
|-------------|-------------------|-------------------|-----------------|
| EL G16WE/WD | 15.5" (39.4cm) | 26.5" (67.3cm) | 1.6" (4.1cm) |
| EL G16NE/ND | 15.5" (39.4cm) | 27.9" (70.9cm) | 3.1" (7.9cm) |
| EL G22WE/WD | 21.6" (54.9cm) | 26.5" (67.3cm) | 1.6" (4.1cm) |
| EL G22NE/ND | 21.6" (54.9cm) | 28.0" (71.1cm) | 3.1" (7.9cm) |

See Page 2 for Ordering Information

ELG CosmoPolis / MasterColor Elite HID Series


Element Enclosed Glass High Bay, 60-315 watt

Element Glass High Bay
16" enclosed, clear lens,
standard single baffle



Notes

- 1) Philips CosmoPolis lighting system:
60W, 90W or 140W lamp with Advance
CosmoPolis ballast.
- 2) Philips MasterColor Elite lighting
system: 210W or 315W lamp with
Advance e-Vision ballast.
- 3) Photometry available online.
IES file names reflect catalog logic.
- 4) 60W-140W CosmoPolis lamps:
Single ended tubular (T6 clear) white
with a PGZ12 lamp base and holder.
Color Rendering: CRI = 70.
Color Temperature: CCT = 2800K.
210-315W CDM Elite MW lamps:
(T9 clear) with a PGZ18 lamp base
and socket.
Color Rendering: CRI = 90.
Color Temperature: CCT = 3000K.

| Series/Source-Wattage | Optics | E ballast Voltage - Optional Dimming | |
|---|--|---|--|
| Pulse Start Metal Halide CosmoPolis system ⁽¹⁾ <input type="checkbox"/> ELP-60 60W CosmoPolis <input type="checkbox"/> ELP-90 90W CosmoPolis <input type="checkbox"/> ELP-140 140W CosmoPolis MasterColor Elite system ⁽²⁾ <input type="checkbox"/> ELP-210 210W MasterColor Elite <input type="checkbox"/> ELP-315 315W MasterColor Elite  | Reflector / Distribution / Lens <input type="checkbox"/> G16NE 16" Glass reflector, Narrow distribution, Clear lens <input type="checkbox"/> G16ND 16" Glass reflector, Narrow distribution, Diffuse lens <input type="checkbox"/> G16WE 16" Glass reflector, Wide distribution, Clear lens <input type="checkbox"/> G16WD 16" Glass reflector, Wide distribution, Diffuse lens <input type="checkbox"/> G22NE 22" Glass reflector, Narrow distribution, Clear lens <input type="checkbox"/> G22ND 22" Glass reflector, Narrow distribution, Diffuse lens <input type="checkbox"/> G22WE 22" Glass reflector, Wide distribution, Clear lens <input type="checkbox"/> G22WD 22" Glass reflector, Wide distribution, Diffuse lens | <input type="checkbox"/> 208E <input type="checkbox"/> 240E <input type="checkbox"/> 277E 60 / 90 / 140W Advance CosmoPolis system ballast (wattage specific) 210 / 315W Advance e-Vision system ballast (for 210 and 315 watt systems) | |
| | | Optional Dimming Ballast: <i>Available for 210W and 315W units only.</i> <i>Requires 0-10V low voltage wiring.</i> <i>Leave blank to specify standard non-dimming ballast.</i> <input type="checkbox"/> BL Bi-Level (Hi / Low) dimming to 50% power <input type="checkbox"/> AD Analog (full range 0-50) dimming to 50% power | |

Distribution Guide and Ballast Data ⁽³⁾

| Wattage | Available Optics | Lamp / Socket ⁽⁴⁾ | Ballast | Initial Lamp Lumens | Lumens per Watt | Rated Life (hrs) | Line Current 208 / 240 / 277 | Line Watts |
|----------------------------|------------------|--|---------------|---------------------|-----------------|------------------|------------------------------|------------|
| with Clear or Diffuse Lens | | | | | | | | |
| PSMH 60 | G16N/W G22N/W | CPO-TW 60W/728 PGZ12 socket | ICW60NLS | 6,850 | 114 | 18,000 | 0.32 / 0.28 / 0.24 | 67 |
| PSMH 90 | G16N/W G22N/W | CPO-TW 90W/728 PGZ12 socket | ICW90MLS | 10,450 | 116 | 20,000 | 0.47 / 0.41 / 0.35 | 99 |
| PSMH 140 | G16N/W G22N/W | CPO-TW 140W/728 PGZ12 socket | ICW140MLS | 16,500 | 118 | 20,000 | 0.75 / 0.67 / 0.57 | 153 |
| PSMH 210 | G16N/W G22N/W | CDM Elite MW 210/T9/930/U/E PGZ18 socket | IZMH210315RLF | 24,150 | 115 | 20,000 | 1.20 / 1.00 / 0.82 | 229 |
| PSMH 315 | G16N/W G22N/W | CDM Elite MW 315/T9/930/U/E PGZ18 socket | IZMH210315RLF | 37,800 | 120 | 20,000 | 1.80 / 1.54 / 1.30 | 343 |

© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

PT#: SP010A0513

ELG CosmoPolis /MasterColor Elite HID Series

Element Enclosed Glass High Bay, 60-315 watt

Finish options

Standard colors



- ☐ **WHT**
Smooth White
(Default ballast
finish if color is not
specified.)




- ☐ **TWHT**
Textured
White



- ☐ **TBK**
Textured
Black



- ☐ **TSA**
Textured
Satin
Aluminum



- ☐ **TGR**
Textured
Gray



- ☐ **TDB**
Textured
Dark
Bronze

- ☐ **TGN**
Textured
Green

Decorator colors



- ☐ **PRL**
Pearl
Metallic



- ☐ **PWT**
Pewter
Metallic



- ☐ **CRL**
Charcoal
Metallic



- ☐ **BGE**
Beige
Metallic



- ☐ **TER**
Terra
Metallic

**RAL color may also
be specified.**

- ☐ **RAL(X)**
X = Custom RAL
color number
Consult factory


Custom Multi-color Luminaire

Defined by Custom Submittal Drawing
available on website Consult factory for
assistance.

- ☐ **MC(XXX)** = Custom Multi-Color

Simple two-color Element Custom
Multi-Color Luminaire Example:

Decorator colors Terra Metallic and Beige
Metallic are shown.

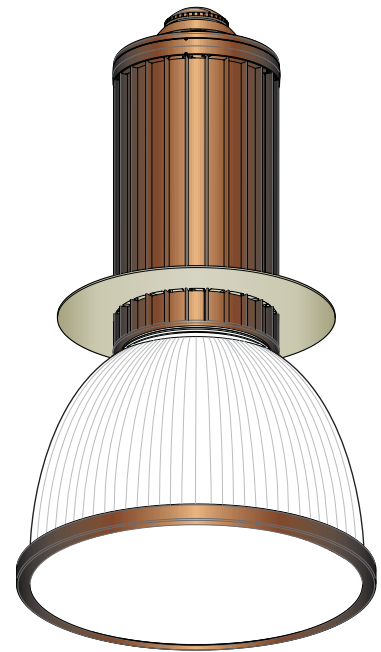

First, specify overall custom ballast color.

Lens trim color on enclosed units is
typically the same as ballast color, but
may be specified to match baffle if
desired.

Second, specify contrasting baffle color.

Single Baffle is standard.

The baffles in a Dual Baffle or Tri-Baffle
option are typically specified as the same
contrasting color on a Custom Multi-Color
unit.

However, any combination of colors may
be specified as defined by the Custom
Submittal Drawing.




ELG CosmoPolis /MasterColor Elite HID Series

Element Enclosed Glass High Bay, 60-315 watt

Options (Factory Installed)

Decorative Baffle Options

- ☐ **BD**
Dual Baffle
- ☐ **BT**
Tri-Baffle



Note:
Single Baffle is standard.

Decorative Suspended Cable Mounting For Non-Dimming units

- ☐ **CC(X)**
Suspended Cable Mount Luminaire with single Coil Cord
 - ☐ **CS(X)**
Suspended Cable Mount Luminaire with single Straight Cord
- (X) = Cord length in feet: 3, 6 or 8

Note: LQ1 is not available with CC or CS option.

For Dimming units

When Element luminaires with dimming capabilities are specified with a suspended cable mount option, the use of both the straight and coil cords is required. A central straight cable carries the low voltage dimming leads to the ballast and a coil cord supplies ballast and lamp power. Upper mounting plate detail at right shows the luminaire suspension cables and the straight and coil cord combination.





Decorative Suspended Cable Mount Lower Lens

| Lens size dependent on optics. | Optics | Lens Diameter | Hole Diameter |
|--------------------------------------|------------------|-----------------|-----------------|
| | Nominal Diameter | | |
| | 19" and below | 24.0" (60.96cm) | 9.5" (24.13cm) |
| | 22" and above | 32.0" (81.28cm) | 13.5" (34.29cm) |

Note:
The suspended lens option is shown with Metal over Glass optics (ELMG).

Solid Suspended Glass Lens:

- ☐ **L1C**
Solid suspended Clear glass lens
- ☐ **L1D**
Solid suspended Diffuse glass lens

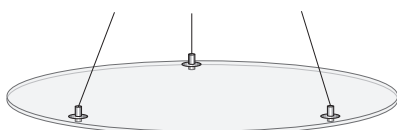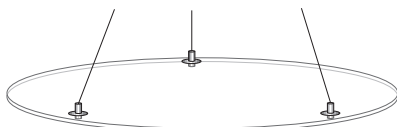

detail:
lens
suspend
fitting and
cable
connection
at baffle





detail:
lens
suspend
fitting and
cable
connection
at lens



Suspended Lens with center opening:

- ☐ **L2C**
Suspended Clear glass lens with center opening
- ☐ **L2D**
Suspended Diffuse glass lens with center opening

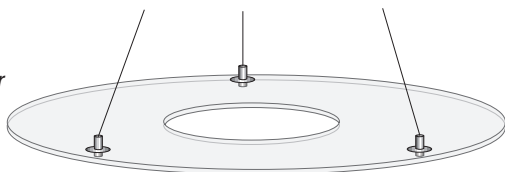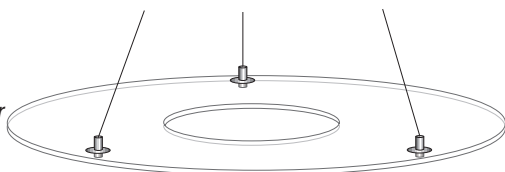

Silkscreened Clear Suspended Lens:

- ☐ **L1S** Silkscreened clear glass lens
- ☐ **L2S** Silkscreened clear glass lens with center opening

Consult factory.



May be specified by ink color, dot pattern, or by client determined logo art or design.

ELG CosmoPolis / MasterColor Elite HID Series

Element Enclosed Glass High Bay, 60-315 watt

Decorative Remote Ballast Mounting

Note: Dimming or Non-Dimming units with LQ1 option require both a central straight cord as well as a coil cord.

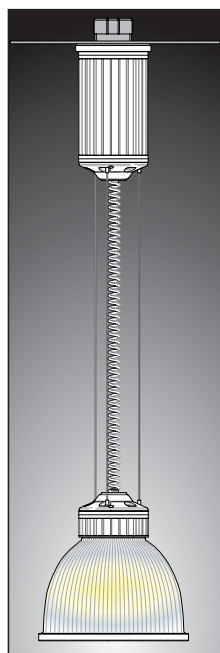

dimming or non-dimming without LQ1

- ☐ **RC(X)**
Remote Ballast, Suspended Cable Mount Luminaire with single Coil Cord

(X) = Cord length in feet: 3, 6 or 8 (max)



dimming or non-dimming without LQ1

- ☐ **RS(X)**
Remote Ballast, Suspended Cable Mount Luminaire with single Straight Cord

(X) = Cord length in feet: 3, 6 or 8 (max)



dimming or non-dimming with CSR or LQ1

- ☐ **RP(X)**
Remote Ballast, Pendant Mount Luminaire mounted to 3/4\"/>

(X) = Pendant length in feet: 3, 6 or 8

Auxiliary / Emergency Lighting

- ☐ **CSR** Hot Quartz Restrike using Current Sensing Relay (Extinguishes auxiliary lamp when main arc strikes.)
- ☐ **LQ1** Separately Wired (120V) Hot / Cold Quartz Restrike
Externally controlled emergency lighting from a separate power source. To ensure integrity of the emergency lighting system, LQ1 leads should be hardwired. Suitability of specifying emergency lighting (LQ1) with (5-wire) cord and plug is the determination of the user.
LQ1 is not available with single cord CC or CS option.

LiteMatic Operation



Normal Start:
Main and Quartz lamps both energized.



Main Lamp Reaches Approximately 40% of Rated Output:
Quartz lamp automatically extinguishes (combined lamp currents never exceed that of main lamp at 100% output).



When Arc Extinguished:
Auxiliary quartz lamp automatically energized when power is restored.



Main Lamp Reaches 40% of Rated Output:
Quartz lamp automatically extinguishes

Ballast Fusing

- ☐ **F1** Single Fuse, 277V


- ☐ **F2** Double Fuse, 208 / 240V

Alternate Mounting

- ☐ **HCP-(X)C-L(Y)20P** Hook, Cord and Plug, 3-Wire
(X) = Cord length in feet: 3, 6 or 10
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V
- ☐ **HCP-(X)C-L2320P** Hook, Cord and Plug, 5-Wire
(X) = Cord length in feet: 3, 6 or 10
- ☐ **H4-HCP-L(Y)20P** Pendant Power Hook, 3-Wire (300V) with HCP
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V
- ☐ **H4-HCP-L2320P** Pendant Power Hook, 5-Wire (600V) with HCP
- ☐ **LCP-(X)C-L(Y)20P** Loop, Cord and Plug, 3-Wire
(X) = Cord length in feet: 3, 6 or 10
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V
- ☐ **LCP-(X)C-L2320P** Loop, Cord and Plug, 5-Wire
(X) = Cord length in feet: 3, 6 or 10
- ☐ **H5-LCP-L(Y)20P** Power Hook, 3-Wire (300V) with LCP
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V
- ☐ **H5-LCP-L2320P** Power Hook, 5-Wire (600V) with LCP


Unit is pre-wired with 3-conductor rubber jacketed cable and heavy duty (16/3) NEMA twist-lock plug, along with die-cast hook with locking screw. 20A standard.

When specified with LQ1, unit is pre-wired with 5-conductor rubber jacketed cable and heavy duty (16/5) NEMA twist-lock plug (L2320P), along with die-cast hook with locking screw. 20A standard.




Pendant Mounted Power Hook with NEMA receptacle. Unit is pre-wired with Hook, Cord and Plug.

When specified with LQ1, Pendant Mounted Power Hook has an L2320R NEMA receptacle.




Unit is pre-wired with 3-conductor rubber jacketed cable and heavy duty (16/3) NEMA twist-lock plug, with die-cast loop. 20A standard.

When specified with LQ1, unit is pre-wired with 5-conductor rubber jacketed cable and heavy duty (16/5) NEMA twist-lock plug (L2320P), with die-cast loop. 20A standard.



Power Hook with thru-wire provision contains a NEMA receptacle. Unit is prewired with Loop, Cord and Plug.

When specified with LQ1, 5-Wire version is required.



Ballast Safety Cable Not available on units with suspended cable option or remote ballast option.

- ☐ **SC3** 3' Safety Cable

- ☐ **SC6** 6' Safety Cable

- ☐ **SC10** 10' Safety Cable

ELG CosmoPolis / MasterColor Elite HID Series

Element Enclosed Glass High Bay, 60-315 watt

Accessories (Field Installed - Shipped Separately)

Ballast Fusing

☐ **F1-Kit** Single Fuse, 277V


☐ **F2-Kit** Double Fuse, 208 / 240V

Alternate Mounting

- ☐ **HCP-(X)C-L(Y)20P** Hook, Cord and Plug, 3-Wire
(X) = Cord length in feet: 3, 6 or 10
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V
- ☐ **HCP-(X)C-L2320P** Hook, Cord and Plug, 5-Wire
(X) = Cord length in feet: 3, 6 or 10

3-conductor rubber jacketed cable and heavy duty (16/3) NEMA twist-lock plug as specified, with die-cast hook with locking screw. 20A standard.

When specified for unit equipped with LQ1, 5-conductor rubber jacketed cable is required, which is wired to a heavy duty (16/5) NEMA twist-lock plug (L2320P), with die-cast hook with locking screw. 20A standard.



☐ **H4** Pendant Power Hook, 3-Wire

Pendant Mounted Power Hook with NEMA receptacle as specified. Used with corresponding Hook, Cord and Plug.

When specified for unit equipped with LQ1, 5-wire version is required.




☐ **H4-5W** Pendant Power Hook, 5-Wire

☐ **LCP-(X)C-L(Y)20P** Loop, Cord and Plug, 3-Wire
(X) = Cord length in feet: 3, 6 or 10
(Y) = 3-Wire NEMA voltage code: 6=208/240V, 7=277V

3-conductor rubber jacketed cable and heavy duty (16/3) NEMA twist-lock plug as specified, with die-cast loop. 20A standard.

When specified for unit equipped with LQ1, 5-conductor rubber jacketed cable is required, which is wired to a heavy duty (16/5) NEMA twist-lock plug (L2320P), with die-cast loop. 20A standard.



☐ **LCP-(X)C-L2320P** Loop, Cord and Plug, 5-Wire
(X) = Cord length in feet: 3, 6 or 10

☐ **H5** Power Hook with thru-wire provision, 3-Wire

Power Hook with thru-wire provision contains a NEMA receptacle. Used with corresponding Loop, Cord and Plug.

When specified for unit equipped with LQ1, 5-Wire version is required.



☐ **H5-5W** Power Hook with thru-wire provision, 5-Wire

Mounting Extras

☐ **HM**

Hook Male



☐ **LM**

Loop Male



☐ **JA75** Joint Aligner

50 lb. maximum allowed.



☐ **SH75** Swivel Hanger


50 lb. maximum allowed if hung from junction box.



Wireguard

☐ **WG-XX** Wireguard (X) = Optics diameter in inches: 16 or 22

For maximum endurance in active environments, the lens may be protected with a wireguard. **Not available with decorative suspended cable mount lower lens options (L1C, L1D, L1S, L2C, L2D, L2S).**



Notes



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

PT#: SP010A0513

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008