

Type No. _____

Catalog No. _____

Job. Name _____

Revolution Series

R1 Architectural High-Bay Luminaire

APPLICATIONS

- Mid-range wattages and smaller fixtures are designed to be hung lower to highlight and accent
- Applications include offices, public buildings, high-end boutiques and shops, supermarkets, retail and big box stores

CONSTRUCTION

- Die cast aluminum ballast housing
- Standard finish Duraplex II aluminum electrostatic powder coat
- Mercury and lead free design and ROHS compliant electronics
- Optional colors available

ELECTRICAL

- Energy efficient, electronic pulse start MH ballast
- High power factor, electronic compact fluorescent ballasts available in 1 lamp configuration
- HID Lampholder to be G8.5 base for T4 CMH lamps
- G12 base for T6 CMH lamps
- Compact fluorescent lamps to be GX24q

OPTICS

- Injection molded clear acrylic prismatic reflector
- Injection molded frosted acrylic prismatic reflector
- Formed aluminum reflector brightened for performance
- Enclosed model choices include laminated frosted glass lens & decorative cast aluminum blades, clear flat acrylic lens or frosted flat acrylic lens

MOUNTING

- Mounting choices include 1/2" NPS pendant (standard) (stem by others)
- Decorative hook with cord (optional)
- Aircraft cable with coiled or straight cord (optional)

WARRANTY/LISTINGS


- CSA approved for damp locations
- Published one year limited warranty

Ordering Guide Example: R1G09O132HFSDWL-8

R	1	G	09	O	132	HF	SD	W	L	—	8

Series	Size	Material	Reflector Diameter	Lens	Lamp Wattage	Source/Ballast Type	Mounting	Finish	Options	Voltage
R = Revolution	1 = Mini	H =Spun Aluminum	09 =9"	O =Open ²	126 =(1) 26 132 =(1) 32	HF	SD =Standard 1/2" Hub	B =Flat Black	L =Lamped	6 =120/277 8 =120-277
		G =Clear Acrylic		G =Flat Glass with Blades	020 =20 watt T4 ² 030 =30 watt T4 ² 070 =70 watt T4 ²	E4 =Electronic T4	C4 =4' Coiled Cord C0 =10' Coiled Cord	W =Flat White	X =Line Item Lamp	
		W =Opal Acrylic		C =Flat Clear Acrylic	039 =39 watt T6 ² 070 =70 watt T6 ²	E6 =Electronic T6	S6 =6' Straight Cord 3DC =Decorative Hook with 3' cord 3DCP =Decorative Hook with 3' cord with plug ¹	A =Aluminum	FS =In-Line Fusing (120-277v)	

¹ Specify voltage when requesting this option ² WARNING: T4 and T6 lamps must include lens and are suitable for enclosed luminaires only

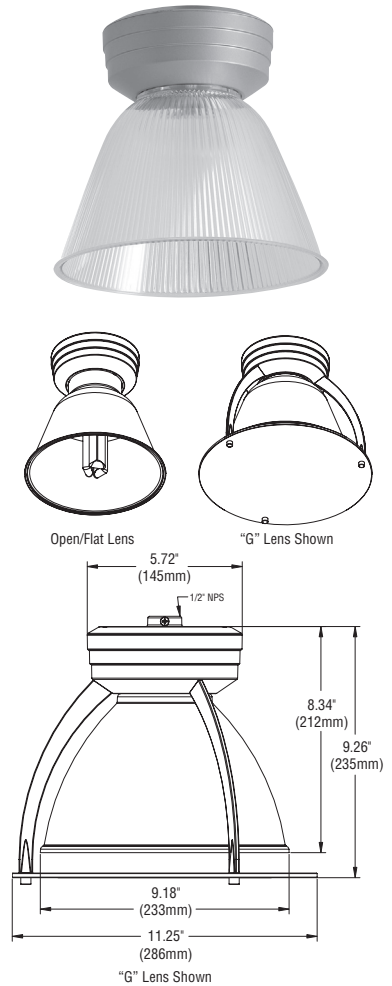

Exceline

1611 Clovis R. Barker Road • San Marcos, TX 78666
800.545.1326 • 512.392.5821 • Fax: 512.753.1122 • www.exceline.com
PT#: EXSP0148A0812

Product information is subject to change without notice

PHILIPS