

Type No. _____

Catalog No. _____

Job. Name _____

Kaleidoshade

Vaportite Decorative Series Space Age Shade (Remote Ballast Only)

APPLICATIONS

- Restaurants, Taverns or Nightclubs, Food Courts, Atriums or Plazas, Malls, Retail Outlets, Stores, Athletic Clubs and Facilities, Theatres, Arenas, Stadiums, Amusement Parks.

CONSTRUCTION

- Spun aluminum decorative shade.
- Heat and shock resistant, prismatic glass optical chamber with neoprene gasketing.
- Corrosion resistant Duraplex II white polyester powder coated finish standard.
- Optional designer finishes available. (Consult factory)
- Shades painted both sides unless ordered otherwise.

OPTICS

- Low glare clear prismatic glass globe standard.

ELECTRICAL

- All ballasts are remote mounted Fcan only (HF provided with UL Listed enclosure).
- Porcelain spring-loaded 4KV pulse rated socket-medium base.
- Compact Fluorescent ballasts are electronic HPF >95%, <10% THD.
- PLT four pin base GX24q-3(26/32W), GX24q-4(42W).
- Starting temperature: LX(HPS)-40°F/-40°C, PMA(PS) -20°F/-30°C, HF(PLT)0°F/-18°C.
- Consult factory for lamp to ballast distances.
- All metal halide fixtures are pulse start.

MOUNTING

- Requires 1/2" threaded conduit/stem.
- Die-cast aluminum guard turns and locks into place.
- Tamper-proof stainless steel screws lock guard to housing.

WARRANTY/LISTINGS

- UL 1598 listed for wet locations.
- Published one year limited warranty.

Ordering Guide Example: RSA100MALCGC-6

RSA	100	MA	L	CG	C	—	6
Prefix	Wattage	Source	Lamp	Globe	Cage	Options	Voltage
RSA	70 (ED17) ¹	MA	L	AG=Amber ⁵	C		1=120
	100 (ED17) ¹			BG=Blue ⁵			4=277
	150 (ED17) ⁶	PMA		CG=Clear			6=120/277
	35 (ED17)	NLX ²		G=Clear Prismatic			8=120-277
	50 (ED17)	NLX ² or LX ³		GG=Green ⁵			
	70 (ED17)	NLX ² or LX ³		LG=Lexan			
	100 (ED17)	LX ³		OG=Opal ⁵			
	150 (ED17)	LX ³		RG=Ruby ⁵			
	26 (PLT)	HF ^{4,7}					
	32 (PLT)						
	42 (PLT)						
	100 (A)	IN ⁴					
	200 (A)						

¹ Voltage is 6(120/277)HX/HPF.

² Normal Power Factor. Voltage is 1(120).



³ Voltage is 6(120/277).

⁴ Voltage is 1(120).

⁵ 100W HID maximum on all colored globes.


⁶ Outdoor use only (150w).

⁷ 42W maximum on all colored globes.



Kaleidoshade

Vaportite Decorative Series Space Age Shade (Remote Ballast Only)

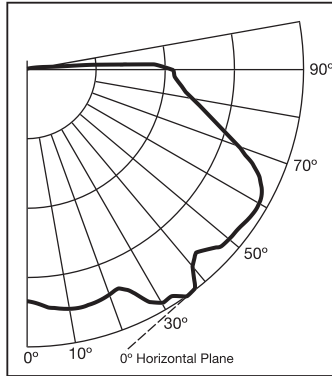

RSA200 SHADE

RLP150PMALGC-8 LUMENS: 15,000

LAMP: 150W, Clear, EFFICIENCY:
64%

Type No. _____

Catalog No. _____

Job. Name _____

Kaleidoshade

Field-Installed Mounting Accessories (All Kaleidoshade Units are Remote Ballast)


Kaleidoshade Accessories

Accessories are field installed. Order as separate part number.

Decorative Wall And Pole Mount Arms For Remote Ballast Units.


RBGNH

Wall mount gooseneck arm with maximum rise.




RBGNH1

Wall mount gooseneck arm with medium rise.




RBGNH2

Wall mount gooseneck arm with no rise.




RBGNV

Wall mount gooseneck arm with vertical rise.



RBPT3


Post top arm for mounting to 3 1/2" tenon.



*Incandescent only

RBPT7

Post top arm for mounting to 2 3/8" tenon.



*Incandescent only

Straight Arms (Ceiling Mount)

1/2 - 14 Stem 12XX = 12" stem



1/2 - 14 Stem 24XX = 24" stem

1/2 - 14 Stem 36XX = 36" stem


1/2 - 14 Stem 48XX = 48" stem

RSWC1/2XX = 1/2" Threaded Ball Swivel with Canopy
(XX = color code)

Mounting Details



Wallplate mounts "over" box –
not to the box



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

PT#: SP0119A0513

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008