

Job:
Type:
Notes:


100 Line

Featuring CosmoPolis Electronic HID System

Page 1 of 3

109 Contura Sconce

The Philips Gardco 109 Contura high performance sconces offer an excellent alternative to unsightly wall mounted fixtures. These architecturally refined luminaires mirror the styling of the Philips Gardco Contura luminaire and are designed to integrate naturally to wall surfaces. The 109 luminaires are available with three (3) different distribution patterns. Each luminaire is designed to accept HID sources up to 175MH, and Compact Fluorescent sources up to 42 watts. 109 luminaires installed in the normal downlight position, with a flat glass lens, provide full cutoff performance.

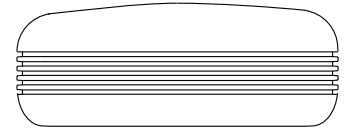

PREFIX	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS

Enter the order code into the appropriate box above. Note: Philips Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

PREFIX

- 109** Contutra Sconce
- 109EM** Emergency Sconce
- 109EMC** Emergency Sconce, Cold Temperature
- 109EMR** Remote Emergency Sconce

Refer to configuration chart below for available combinations.

DISTRIBUTION

- FT** Forward Throw *Not Available with Fluorescent or LPS sources.*
- WT** Wide Throw *Not Available with Fluorescent or LPS sources.*
- MT** Medium Throw

WATTAGE AND VOLTAGE

LAMP / VOLTAGE CHART - 109

HID*	Voltage					
	120	208	240	277	347	480
60CMPE	•	200 - 277				
50MH	•			•		
70MH	•	•	•	•	•	
100MH	•	•	•	•	•	•
150MH	•	•	•	•	•	•
175MH**	•	•	•	•	•	•
50CMHE¹	UNIV					
70CMHE¹	UNIV					
100CMHE¹	UNIV					
35HPS	•					
50HPS	•			•		
70HPS	•	•	•	•	•	•
100HPS	•	•	•	•	•	•
150HPS	•	•	•	•	•	•
Fluorescent						
26QF¹	UNIV					
226QF¹	UNIV					
32TRF¹	UNIV					
232TRF¹	UNIV					
42TRF¹	UNIV					
242TRF¹	UNIV					

Combinations marked with a dot, shown with "UNIV" or "200-277" are available for ordering.

60CMPE

60 Watt CosmoPolis high performance electronic ceramic MH lamp and ballast system.

Available in FT, WT and MT

Available 120V or 200V - 277V only.

* MH, CMHE and HPS types require medium based E17 lamps. All MH 150W and below are pulse start by design, including CMHE types.

** 175MH not available for sale in the United States.

MH - Metal Halide
CMHE - Ceramic Metal Halide with Electronic Ballast
HPS - High Pressure Sodium
LPS - Low Pressure Sodium
TRF - Triple Tube Fluorescent
QF - Quad Fluorescent

CONFIGURATION CHART - 109EM OR 109EMC⁵

Fluorescent	Distribution			Voltage					
	FT	WT	MT	120	208	240	277	347	480
226QF²			•	•			•		
32TRF			•	•			•		
42TRF			•	•			•		

CONFIGURATION CHART - 109EMR⁵

Fluorescent	Distribution			Voltage					
	FT	WT	MT	120	208	240	277	347	480
226QF^{2,3,4}			•	•			•		
32TRF			•	•			•		
232TRF^{2,3,4}			•	•			•		
42TRF			•	•			•		
242TRF^{2,4}			•	•			•		

1. Fluorescent and CMHE luminaires feature electronic ballasts that accept 120V through 277V, 50hz to 60hz, input. Specify "UNIV" voltage for 120V through 277V.
2. One (1) lamp is powered in emergency mode with EM, EMC and EMR types with the B84CG option.
3. Available with ICE420 option, which powers two (2) lamps in emergency mode. ICE420 option only available with 226QF or 232TRF. CAUTION: Maximum battery pack input power for EMR units with ICE420 option is 100 watts (.83 amps) when heating element is on. This is in addition to the normal input power for luminaire lamps and ballast.
4. Available with I162 option, which powers two (2) lamps in emergency mode. Lamps are wired in parallel. In emergency mode, should one lamp become inoperable, the remaining lamp will operate with a minimum total initial output of 2,250 lumens.
5. Refer to "109 Emergency Sconce Table" on page 3 for additional information.

1611 Clovis Barker Road, San Marcos, TX 78666
(800) 227-0758 (512) 753-1000 FAX: (512) 753-7855 sitelighting.com

© 2012 Koninklijke Philips Electronics N.V. All Rights Reserved.

Philips Gardco reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

G200-013/0512

PHILIPS





FINISH

BRP	Bronze Paint
BLP	Black Paint
WP	White Paint
NP	Natural Aluminum Paint
BGP	Beige Paint
LGP	Light Granite
DGP	Dark Granite
LSP	Light Sandstone
DSP	Dark Sandstone
RBP	Red Brick
OC	Optional Color Paint <i>Specify Optional Color or RAL ex: OC-LGP or OC-RAL7024.</i>
SC	Special Paint <i>Specify. Must supply color chip.</i>


OPTIONS

F⁶	Fusing	6. 120V through 277V only
PCB⁷	Button Type Photocontrol	7. Not available with 480V.
QS⁸	Quartz Standby	8. HID only, Not available with CMHE Ballasts, FT Optics or in 480V. 100 watt Quartz maximum.
QST⁸	Quartz Standby - Timed Delay	9. WT Optic only. 150w HID maximum, 100w Quartz maximum.
Q924⁹	Quartz Emergency	10. WT Optic only. 50CMHE or 70CMHE only. Supplied with two (2) 20W MR16 or two (2) 35W MR16 Flood (40° beam) lamps.
QT924⁹	Quartz Emergency - Timed Delay	11. Not available with WG or POLY options. Not available with EM, EMC or EMR types.
Q12V^{9,20}	Quartz 12V Emergency	12. Rear entry permitted.
Q20MR^{10,20}	(2)MR16 12V Emergency - 20 Watt	13. Not Available with WLU option.
Q35MR^{10,20}	(2)MR16 12V Emergency - 35 Watt	14. 100 watt HID maximum. Polycarbonate lenses carry a 1 year warranty only.
ELED^{19,20}	(2)LED 12V Emergency Modules - 6.2 Watt	15. All Emergency Battery Packs for EMR types MUST be ordered with luminaires and supplied by Philips Gardco.
SL	Solite® Diffusing Lens	16. CAUTION: Maximum battery pack input power for EMR units with ICE420 option is 100 watts (.83 amps) when heating element is on. This is in addition to the normal input power for luminaire lamps and ballast.
UT	5° Uptilt	17. Lamps are wired in parallel. In emergency mode, should one lamp become inoperable, the remaining lamp will operate with a minimum total initial output of 2,250 lumens.
WLU¹¹	Wet Location Door for Inverted Mount	18. Available with CosmoPolis™ system only. See submittal sheet GE200-005 for complete information on LumiStep™ ballasts.
WS¹²	Wall Mounted Box for Surface Conduit	19. WT Optic only. 50CMHE or 70CMHE only. Supplied with two (2) 6.2 watt, 300 lumen LED modules.
WS/UT¹²	WS Option w/5° Uptilt	20. Requires a separate source of 12V power by others.
WG¹³	Wire Guard	
POLY^{13,14}	Polycarbonate Sag Lens	
L6¹⁸	Lumistep™ Ballast - 6 hour	
L8¹⁸	Lumistep™ Ballast - 8 hour	
L10¹⁸	Lumistep™ Ballast - 10 hour	
EMR LUMINAIRES ONLY¹⁵		
B84CG	Bodine Remote Emergency Pack	
ICE420¹⁶	IOTA Remote Emergency Battery Pack 226QF / 232TRF only.	
I162¹⁷	IOTA Remote Emergency Battery Pack 226QF / 232TRF / 242TRF only.	

DIMENSIONS

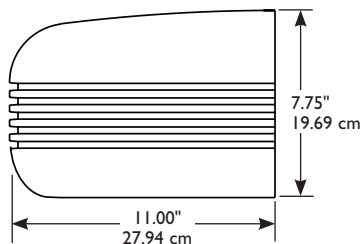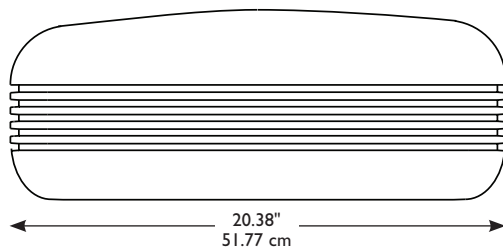

Mounting Plate

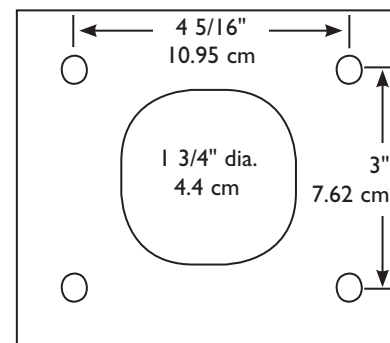

Mounting Bolt Pattern

Note: Mounting plate center is located in the center of the luminaire width and 3.5"(8.89cm) above the luminaire bottom (lens down position). Splices must be made in the J-box (by others). Mounting plate must be secured by max. 5/16" (.79cm) diameter bolts (by others) structurally to the wall.

SPECIFICATIONS

GENERAL: Each Philips Gardco 109 luminaire is a wall mounted cutoff luminaire for high intensity discharge or compact fluorescent lamps. Internal components are totally enclosed in a rain-tight, dust-tight and corrosion resistant housing. The housing, back plate and door frame are die cast aluminum. A choice of three (3) optical systems is available. Luminaires are suitable for wet locations (damp locations if inverted).

HOUSING: Housings are die cast aluminum. A memory retentive gasket seals the housing to the door frame to exclude moisture, dust, insects and pollutants from the optical system. A black, die cast ribbed backplate dissipates heat for longer lamp and ballast life.

DOOR FRAME: A single-piece die cast aluminum door frame integrates to the housing form. The door frame is hinged closed and secured to the housing with two (2) captive stainless steel fasteners. The heat and impact resistant 1/8 (.32cm) tempered glass lens and one-piece gasket are mechanically secured to the door frame with four (4) galvanized steel retainers.

OPTICAL SYSTEMS: Reflectors are composed of specular extruded and faceted components, electropolished, anodized and sealed. Reflector segments are set in arc tube image duplicating patterns to achieve the wide throw, forward throw or medium throw downlight distributions.

ELECTRICAL:

STANDARD LUMINAIRES: Each high power factor HID core and coil ballast is the separate component type. For luminaires provided with CosmoPolis™, each high power factor ballast is electronic, designed specifically for the CosmoPolis™ high performance ceramic metal halide electronic system. All HID ballasts are capable of providing reliable lamp starting down to -20°F/-29°C. Standard fluorescent units have a starting temperature of 0°F/-18°C. Standard fluorescent ballasts are high power factor electronic solid state. Component-to-component wiring within the luminaire will carry no more than 80% of rated current and is listed by UL for use at 600 VAC at 150°C or higher. Plug disconnects are listed by UL for use at 600 VAC, 15A or higher.

LUMINAIRES with Q924 / G12V / QMR20 / QMR35 / ELED OPTIONS: Luminaires with the Q924 or QT924 options require a separate source of 120V power (by others.) Luminaires with Q12V, Q20MR, Q35MR or ELED options require a separate source of 12V power (by others.)

EMERGENCY LUMINAIRES: All emergency luminaires feature an indicator light visible through the lens and a test switch accessible through the door assembly. Minimum battery pack ambient temperatures are as indicated in the 109 Emergency Sconce Table. In the event of a power interruption, emergency luminaires will power compact fluorescent lamps as indicated in the 109 Emergency Sconce Table at reduced light levels for a minimum of 90 minutes.

EMR LUMINAIRES include a 7.5'x2.29m, 12 wire, quick disconnect assembly for wiring through conduit (by others) to a B84CG, 1162 or ICE420 fluorescent emergency battery pack. The fluorescent emergency battery pack MUST be supplied by Philips Gardco. The B84CG option, the 1162 option or the ICE420 option required on the order to the factory.

CAUTION: Maximum battery pack input power for EMR units with ICE420 option is 100 watts (.83 amps) when heating element is on. This is in addition to the normal input power for luminaire lamps and ballast.

109 Emergency Luminaire	Battery Pack Min. Ambient Temperature	Lamps Powered in Emergency Mode
109EM (Integral)	32°F / 0°C	(1) 26, (1) 32, or (1) 42 Watt Compact Fluorescent Lamp
109EMC (Integral)	-4°F / -20°C	
109EMR (Remote) with B84CG Option	32° F/ 0°C	(2) 26, (2) 32 or (2) 42 Watt Compact Fluorescent Lamps
109EMR (Remote) with 1162 Option ²²	32° F/ 0°C	
109EMR (Remote) with ICE420 Option ²³	0°F / -18°C	(2) 26, or (2) 32 Watt Compact Fluorescent Lamps

- Notes:
- 21. See *Philips Gardco Emergency Light Output Information (79115-155)* for emergency lumen output data.
 - 22. Lamps are wired in parallel. In emergency mode, should one lamp become inoperable, the remaining lamp will operate with a minimum total initial output of 2,250 lumens.
 - 23. CAUTION: Maximum battery pack input power for EMR units with ICE420 option is 100 watts (.83 amps) when heating element is on. This is in addition to the normal input power for luminaire lamps and ballast.

LAMPHOLDER: Pulse rated medium base sockets are glazed porcelain with nickel plated screw shell. Fluorescent sockets are high temperature (PBT) with brass contacts.

FINISH: Each standard color luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat finish. Standard colors are as listed. Consult factory for specs on custom colors.

LABELS: All luminaires bear UL or CUL (where applicable) labels, except as noted. Lens down application is Wet Location and lens up is Damp Location. Emergency luminaires do not bear CUL label.

WARRANTY: Philips Gardco luminaires feature a 5 year limited warranty. See Warranty Information on www.sitelighting.com for complete details and exclusions. Polycarbonate lenses carry a 1 year warranty only.

FULL CUTOFF PERFORMANCE: Full cutoff performance means a luminaire distribution where zero candela intensity occurs at an angle at or above 90° above nadir. Additionally, the candela per 1000 lamp lumens does not numerically exceed 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.

CUTOFF PERFORMANCE: Cutoff performance means a luminaire distribution where the candela per 1000 lamp lumens does not numerically exceed 25 (2.5 percent) at an angle at or above 90° above nadir, and 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.