

Job:
Type:
Notes:


Infinity II

Area Luminaires

Page 1 of 3

The Infinity II is a rectangular area luminaire which provides full cutoff, even illumination, and wide spacings. Housings are manufactured in rugged extruded aluminum. All units are thoroughly sealed and gasketed preventing intrusion of moisture, dust, pollutants, and insects. Four (4) segmented aluminum optical systems are available, providing the desired photometric distribution and illumination levels.

Infinity II luminaires provide full cutoff performance.

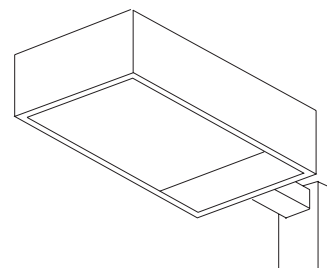

PREFIX	MOUNTING	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS

Enter the order code into the appropriate box above. Note: Philips Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

PREFIX	MOUNTING	DISTRIBUTION
PAES Small Housing	1 Single Pole Mount	<u>Horizontal Lamp</u>
PAEM Medium Housing	2 Twin Pole Mount at 180°	<u>All Housing Sizes</u>
PAEL Large Housing	2@90 Twin Pole Mount at 90°	2H Type II
	3 3-way Pole Mount at 90°	3H Type III
	3@120° 3-way Pole Mount at 120°	FH Type IV Forward Throw
	4 4-way Pole Mount	<u>Medium Housing Only</u>
	WA Wall Mount with Arm	QH Type V
	<i>Small or Medium housing only.</i>	

WATTAGE	VOLTAGE			
	<u>Small Housing</u>	<u>Medium Housing</u>		<u>Large Housing</u>
Pulse Start Metal Halide Magnetic Ballast	<u>2H, 3H, FH Optics</u>	<u>2H, 3H Optics</u>	<u>FH, QH Optics</u>	<u>2H, 3H, FH Optics</u>
	70MH	175PSMH [ⓔ]	175PSMH [ⓔ]	750PSMH
	100MH	200MH [ⓔ]	200MH [ⓔ]	875PSMH
	150MH	250PSMH [ⓔ]	250PSMH [ⓔ]	
	175PSMH [ⓔ]	250PS90* [ⓔ]	320PSMH² [ⓔ]	
	200MH [ⓔ]	320PSMH² [ⓔ]	350PSMH² [ⓔ]	
	250PS90* [ⓔ]	350PSMH¹ [ⓔ]	400PSMH² [ⓔ]	
	250PSMH [ⓔ]	400PSMH¹ [ⓔ]		
Standard MH Magnetic Ballast				<u>2H, 3H, FH Optics</u> 1000MH¹
High Pressure Sodium Magnetic Ballast	<u>2H, 3H, FH Optics</u>	<u>2H, 3H, FH Optics</u>	<u>QH Optics</u>	<u>2H, 3H, FH Optics</u>
	50HPS	250HPS	150HPS	750HPS
	150HPS	400HPS	250HPS	1000HPS
	70HPS		400HPS	
	250HPS			
	100HPS			
* 250 watt Pulse Start Metal Halide with a 90% efficient magnetic ballast. Complies with California Title 20 effective 1/1/2010. Available in 120, 208, 240 or 277V only.				
<div>ⓔ</div> Wattages marked with Circle "E" meet federal energy efficiency standards applicable to 150 watt through 500 watt metal halide luminaires only.				

1. Requires E37 / BT37 lamp.
2. Requires E28 / BT28 lamp.

FINISH


BRA	Bronze Anodized
BLA	Black Anodized
NA	Natural Aluminum Anodized
BRP	Bronze Paint
BLP	Black Paint
NP	Natural Aluminum Paint
WP	White Paint
BGP	Beige Paint
OC	Optional Color Paint Specify Optional Color or RAL ex: OC-LGP or OC-RAL7024.
SC	Special Paint Specify. Must supply color chip.

OPTIONS⁵

F	Fusing
LF⁷	In-Pole/In-Line Fusing <i>(Kit includes In-Line Fuses)</i>
PCT	Photocontrol Receptacle with Photocontrol <i>(Not available with 480V)</i>
PCR	Photocontrol Receptacle
AT	Adjustable Knuckle - Tenon Mount <i>(Not available with Large Housing)</i>
PTF2	Pole Top Fitter 2.375" X 4"
PTF3	Pole Top Fitter 3" - 3.5" X 6"
PTF4	Pole Top Fitter 3.5" - 4" X 6"


DIMENSIONS AND EPA

					EPA - Effective Projected Area (ft ² / m ²)					
Dimensions (In./cm)										
Housing Size	A Width	B Depth	C Height	D	1 Single Arm	2 Twin, 180°	2@90 Twin, 90°	3 Triple, 90°	3@120 Triple, 120°	4 Quad
PAES (Small)	15 / 38.1	21 / 53.34	6.6 / 16.764	47 / 21.32	1.62 / .151	3.24 / .302	3.24 / .302	4.25 / .395	4.25 / .395	4.25 / .395
PAEM (Medium)	20 / 50.8	27 / 68.58	6.6 / 16.764	60 / 27.22	2.79 / .260	5.58 / .519	5.58 / .519	7.70 / .716	7.70 / .716	7.70 / .716
PAEL (Large)	24 / 60.96	31 / 78.74	11.3 / 28.702	93 / 42.19	3.45 / .321	6.90 / .642	6.90 / .642	8.80 / .818	8.80 / .818	8.80 / .818

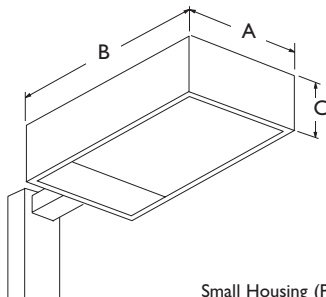

Arm Length and Size

	1 or 2 way 90° Mounting		Size
Small Housing (PAES)	6" 15.24cm	9" 22.86cm	2" X 5" 3.08cm x 12.7cm
Medium Housing (PAEM)	9" 22.86cm	12" 30.48cm	2" X 5" 3.08cm x 12.7cm
Large Housing (PAEL)	12" 30.48cm	12" 30.48cm	2" X 8" 3.08cm x 20.32cm

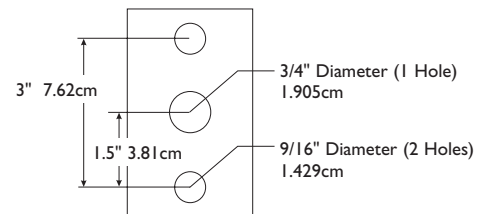

Drill Template

SPECIFICATIONS

GENERAL DESCRIPTION:

The Infinity II is a rectangular full cutoff luminaire for high intensity discharge lamps. Internal components are totally enclosed, rain-tight, dust-tight and corrosion resistant. Arm mounted units attach to pole with no visible hardware or welding.

HOUSING:

Extruded housings feature four precisely mitered aluminum side sections. The top piece is sheet aluminum, crowned for strength and water runoff. The top is secured to the housing and sealed for weathertight integrity.

LENS:

A mitered, extruded, anodized aluminum door frame retains the optically clear, heat and impact resistant, tempered flat glass in a sealed manner. Access to the housing requires no tools.

OPTICAL SYSTEMS:

The segmented reflector system consists of individually formed aluminum facets precisely aligned to provide IES Type II, Type III, Type V Square or Forward Throw lighting distributions.

MOUNTING:

Lampholders are glazed porcelain with nickel plated screw shells. Luminaires are designed for mogul base lamps except 150W and lower metal halide units, which feature medium base lampholders. All mogul base lampholders in metal halide units are position oriented. HPS and MH units all feature pulse-rated lampholders.

ELECTRICAL:

Each high power factor ballast is the separate component type, capable of providing reliable lamp starting down to -20° F. Component-to-component wiring within the luminaire will carry no more than 80% of rated current and is listed by UL for use at 600 VAC at 150°C or higher. Plug disconnects are listed by UL for use at 600 VAC, 15A or higher.

FINISH:

Extruded units are offered with natural, bronze or black non-fading anodized finish applied after fabrication. Powdercoat finishes are also available.

LABELS:

All Luminaires bear UL or CUL (where applicable) Wet Location labels.

WARRANTY: Infinity II Luminaires feature a 1 year limited warranty. See Warranty Information on www.sitelighting.com for complete details and exclusions.

FULL CUTOFF PERFORMANCE: Full cutoff performance means a luminaire distribution where zero candela intensity occurs at an angle at or above 90° above nadir. Additionally, the candela per 1000 lamp lumens does not numerically exceed 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.

CUTOFF PERFORMANCE: Cutoff performance means a luminaire distribution where the candela per 1000 lamp lumens does not numerically exceed 25 (2.5 percent) at an angle at or above 90° above nadir, and 100 (10 percent) at a vertical angle of 80° above nadir. This applies to all lateral angles around the luminaire.



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

G200-045/0413

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008