


Job:  
 Type:  
 Notes:

# Cylinders

## 300 Line Enclosed Uplight

The Philips Gardco 300 Line is a series of compact, high performance cylinder luminaires in a variety of styles and mounting configurations. The Enclosed Uplight style uses high intensity discharge, or incandescent lamps. Housings are die cast aluminum with twin architectural reveals located near the luminaire apertures. Wall mounting with dual clear assembly lens is standard.



PREFIX	MODEL	MOUNTING	TRIMS	LAMP	VOLTAGE	FINISH	OPTIONS

Enter the order code into the appropriate box above. Note: Philips Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

PREFIX	MODEL	MOUNTING	TRIMS
300	U Enclosed Uplight	W Wall	CL Clear Lens

*Luminaires cannot be field modified to change optics or lamp types.*

Voltage:	120	208	240	277	347	480
<i>E17</i>						
50MH	●			●	●	
70MH	●	●	●	●	●	
100MH	●	●	●	●	●	●
50HPS	●			●	●	
70HPS	●	●	●	●	●	
100HPS	●	●	●	●		
<i>PAR38</i>						
P70MH	●	●	●	●	●	
P100MH	●	●	●	●	●	●
<i>Incandescent</i>						
250PAR38	●					
300R40	●					

FINISH
<b>BRP</b> Bronze Paint
<b>BLP</b> Black Paint
<b>WP</b> White Paint
<b>NP</b> Natural Aluminum Paint
<b>BGP</b> Beige Paint
<b>VP</b> Verde Green Paint
<b>OC</b> Optional Color Paint <i>Specify RAL designation ex: OC-RAL7024.</i>
<b>SC</b> Special Color Paint <i>Specify. Must supply color chip.</i>

OPTIONS
<b>F</b> Fusing
<b>PCB</b> Button Type Photocontrol
<b>WS</b> Wall Mounted Box for Surface Conduit

MH - Metal Halide HPS - High Pressure Sodium

*Luminaires cannot be field modified to change optics or lamp types.*

1611 Clovis Barker Road, San Marcos, TX 78666  
 (800) 227-0758 (512) 753-1000 FAX: (512) 753-7855 [sitelighting.com](http://sitelighting.com)

© 2011 Koninklijke Philips Electronics N.V. All Rights Reserved.

Philips Gardco reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

79115-107/0711

**PHILIPS**



### SPECIFICATIONS

**HOUSING:** Housings are die cast aluminum in a single-piece cylindrical form of corrosion resistant alloy, 1/8" min. wall thickness. Units are 7.5" in diameter and 12" in height, nominal measurements.

#### MOUNTING:

**Wall Bracket (W):** Cast aluminum canopy with integrated aluminum arm secured to housing with (2) 5/16" bolts. Requires mounting to a structural member of the building.

#### LIGHT CONTROL (Trim):

**Clear Dual Lens Assembly (CL):** Clear lens trims include a dual lens assembly mounted within a die cast aluminum frame.

**ELECTRICAL:** Internal ballast will be provided based on the specified lamp configuration.


**LAMPHOLDER:** Pulse rated medium base lampholders are glazed porcelain with nickel-plated screw shell.

**FINISH:** Each luminaire receives a fade and abrasion resistant, electrostatically applied, thermally cured, textured TGIC polyester powder coat finish.

**LABELS:** All luminaires bear UL or CUL (where applicable) Wet Location labels.

**WARRANTY:** Philips Gardco luminaires feature a 5 year limited warranty. See Warranty Information on [www.sitelighting.com](http://www.sitelighting.com) for complete details and exclusions. Polycarbonate lenses carry a 1 year warranty only.

### DIMENSIONS

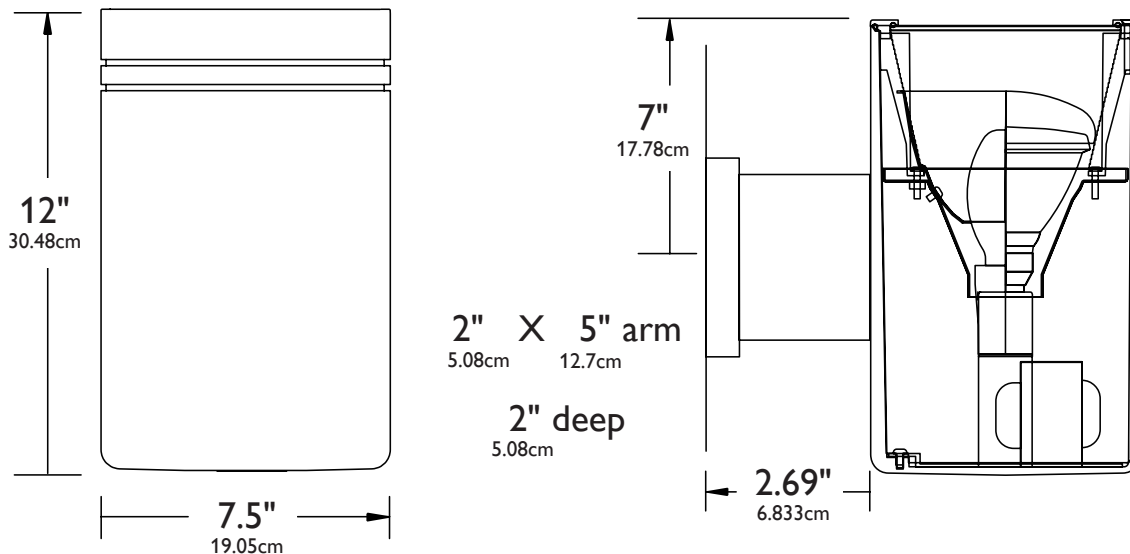

1611 Clovis Barker Road, San Marcos, TX 78666

(800) 227-0758 (512) 753-1000 FAX: (512) 753-7855 [sitelighting.com](http://www.sitelighting.com)

© 2011 Koninklijke Philips Electronics N.V. All Rights Reserved.

Philips Gardco reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

79115-107/0711

**PHILIPS**

**GARDCO**