


Job:
Type:
Notes:

Fascia Plates

600 Series

Page 1 of 2

Philips Gardco Fascia Plates are wall mounted luminaires utilizing compact fluorescent, incandescent, and high intensity discharge lamps. Fascia Plates are graceful architectural accents in the daytime and serve as elegant markers or signage at night. Faces are square or round, perforated or center cut, painted or finished by others in tile. White glass lens diffuses light to produce a soft luminous glow. These luminaires are suitable for outdoor applications and feature rugged die cast housings, silicone seals and gaskets, and polyester powdercoat finishes.



| PREFIX | LENS | WATTAGE | VOLTAGE | LIGHT SHAPE | PLATES | FINISH | COLORED FILTERS | OPTIONS |
|--------|------|---------|---------|-------------|--------|--------|-----------------|---------|
| | | | | | | | | |

Enter the order code into the appropriate box above. Note: Philips Gardco reserves the right to refuse a configuration. Not all combinations and configurations are valid. Refer to notes below for exclusions and limitations. For questions or concerns, please consult the factory.

| PREFIX | LENS | WATTAGE |
|----------------------------|---|--|
| 600D 600C | Drywall Only Concrete Only <i>Allows for installation in poured concrete.</i> | D Diffuse Glass |
| 600U 610S | Universal Surface Mount <i>Fluorescent or Incandescent only.</i> | |
| | | 70MH 70HPS 26QF⁴ INC 100MH 100HPS 32TRF⁴ <i>150w maximum</i> 150MH^{1,2} 150HPS^{1,3} 42TRF⁴ |
| | | <i>MH Metal Halide</i> <i>150 watt and lower are pulse start by design</i> <i>HPS High Pressure Sodium</i> <i>QF Quad Tube Compact Fluorescent</i> <i>TRF Triple Tube Compact Fluorescent</i> <i>INC Incandescent</i> |

1. Available on 600C only.
2. Available with reactor ballast, 277V only.
3. Available with reactor ballast, 120V only.
4. Electronic ballast accepts 120V through 277V, 50 or 60 Hz. Specify "UNIV" for 120V through 277V. 0° F starting temperature


| VOLTAGE | LIGHT SHAPE | PLATES |
|--|---|--|
| UNIV <i>120V though 277V, 50hz to 60Hz, input. Fluorescent luminaires only.</i> | 360 360° Distribution 180U 180° Uplight Distribution 180D 180° Downlight | RS Round Solid ST Square Tile SS Square Solid DT Diamond Tile DS Diamond Solid RL Round Logo RP Round Perforated SL Square Logo SP Square Perforated DL Diamond Logo DP Diamond Perforated |

| FINISH | |
|--|--|
| BRP Bronze Paint OC Optional Color Paint BLP Black Paint <i>Specify RAL designation ex: OC-RAL7024.</i> WP White Paint SC Special Color Paint NP Natural Aluminum Paint <i>Specify. Must supply color chip.</i> BGP Beige Paint | |


| COLORED FILTERS | |
|--------------------|---|
| XX No Color | Flat RD Red FP Fluorescent Pink BD Dark Blue YM Yellow AM Amber BL Light Blue PL Pearl GD Dark Green MR Mirror SL Light Smoke BR Bronze DW White |
| | Radiused RR Red FR Fluorescent Pink DR Dark Blue YR Yellow AR Amber LR Light Blue PR Pearl GR Dark Green SR Light Smoke BE Bronze WR White |

| OPTIONS | |
|--|--|
| F Fusing | |
| WS Wall Mounted Box for Surface Conduit <i>610S only.</i> | |


Round Embossed Plates:



Square Embossed Plates:



Diamond Embossed Plates:



1611 Clovis Barker Road, San Marcos, TX 78666
(800) 227-0758 (512) 753-1000 FAX: (512) 753-7855 sitelighting.com

© 2011 Koninklijke Philips Electronics N.V. All Rights Reserved.

Philips Gardco reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

79115-95/0311

PHILIPS



SPECIFICATIONS

MOUNTING: Wall mount only, outdoor and indoor.

FACEPLATES: Solid, perforated, embossed and custom logo faceplates are one-piece aluminum. Faceplate assemblies are secured to housing with three (3) tamper-resistant hex socket-head screws. Standoffs are machined stainless steel. Ceramic tile tray accepts nine (9) 4 1/4" (10.80cm) square ceramic or stone tile (supplied and set by others) and can be specified with or without center color filter (filter supplied as same size as one tile).

LOGO PLATES: All logos are custom manufactured by Philips Gardco Lighting from a "DXF" file supplied by customer. Philips Gardco will provide electronic file for approval of proportion and reproduction. Logo will be backlit in white (standard) or optional color filters can be selected (Logo in one color filter only).

COLOR FILTER: Color filters, round or square, are nominal 1/8" (.32cm) acrylic.

LENS: Single-piece diffuse white molded glass. Single piece die-cut silicone gasket secures seal between the diecast surface plate and lens.

REFLECTOR: White powdercoat painted spun aluminum.

HOUSING: Housing is corrosion resistant diecast aluminum. Finish is white powdercoat paint. Individual housings must be specified and are suitable for installation in all types of wall construction including concrete and masonry and drywall. Housing mounting application is recessed behind mounting surface.

J-BOX

Recessed Units 600C/600D/600U: Die cast aluminum. Factory installed, field-adjustable to two different mounting positions.

Surface Mounted Units 610S: Recessed J-Box required (by others). Mounting plate mounts over the recessed J-Box and must be attached to structure. VWS option is required if no recessed J-Box is present.

ELECTRICAL: HID units include high power factor ballast. Suitable for -20°F/-29°C starting temperature. Fluorescent models feature an electronic solid state ballast as standard. Accepts (1) 26W, 32W, or 42W lamp. Incandescent unit includes a medium base socket with nickel plated screw shell.


FINISH: Standard finish is fade and abrasion resistant, electrostatically applied, thermally cured TGIC textured polyester powdercoat paint.

LABELS: All luminaires bear either UL or CUL (where applicable) Wet Location labels.



WARRANTY: Philips Gardco luminaires feature a 5 year limited warranty. See Warranty Information on www.sitelighting.com for complete details and exclusions. Polycarbonate lenses carry a 1 year warranty only.

DIMENSIONS

600 D/C/U

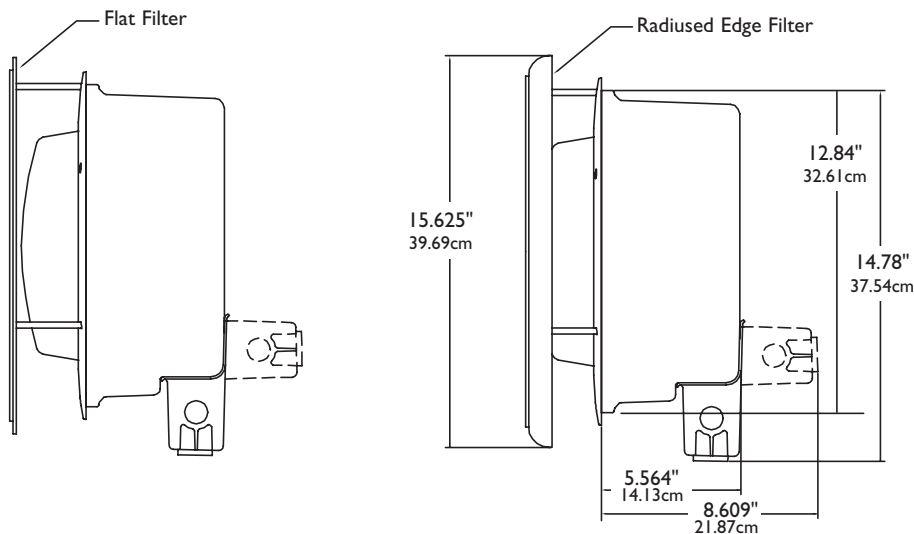

610 S

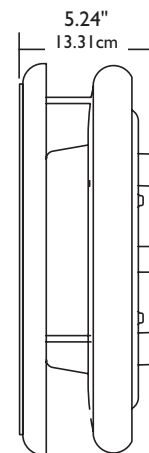

Mounting Bolt Pattern
610S

Center J-Box within
hole pattern
5/16" (.79cm) maximum
fastener size

1611 Clovis Barker Road, San Marcos, TX 78666

(800) 227-0758 (512) 753-1000 FAX: (512) 753-7855 [sitelighting.com](http://www.sitelighting.com)

© 2011 Koninklijke Philips Electronics N.V. All Rights Reserved.

Philips Gardco reserves the right to change materials or modify the design of its product without notification as part of the company's continuing product improvement program.

79115-95/0311

PHILIPS

