


# Aluminum Steplyte (RRCBL1) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

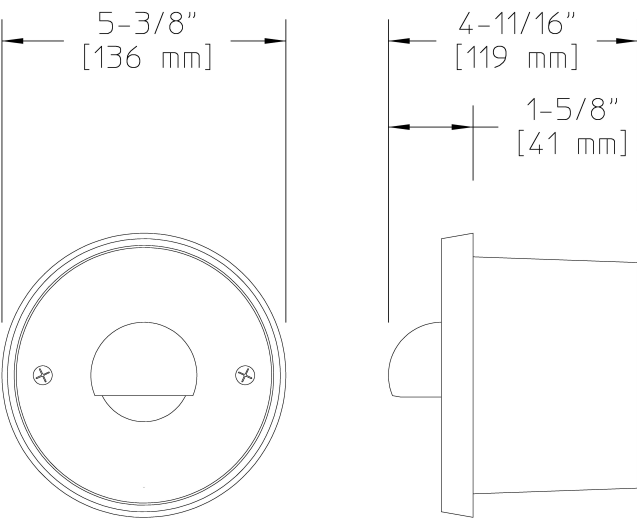

## Ordering Guide

Example: RRCBL1 A

Product Code	RRCBL1	Aluminum Steplyte
Finish	A B H	Black White Bronze

## Specifications

**HOUSING:**  
One-piece cast aluminum housing, cast aluminum (copper free) faceplate. Fasteners are 300 series stainless steel.

**FINISH:**  
Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting. Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B117 specifications.

**OPTICAL ASSEMBLY:**  
Tempered glass spread lens.

**LAMPING:**  
50W maximum MR16 bi-pin lamp. Lower wattage lamps are acceptable. Lamp is not included.

**ELECTRICAL ASSEMBLY:**  
Bi-pin socket type (GU5.3) with 250° C high temperature teflon coated wire leads. 12 volt fixture is pre-wired with 6-ft. pigtail of 18-2 AWG, 105° C, SPT-1W wire. Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included. 12 Volt system requires remote transformer, not included.

**WARRANTY:**  
Three-year limited warranty.

**CERTIFICATIONS:**  
ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

**Width:**  
5 3/8" (136mm)

**Depth:**  
4 11/16" (119mm)

**Max. Weight:**  
2.3 lb