


Aluminum Steplyte (RRCL14) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

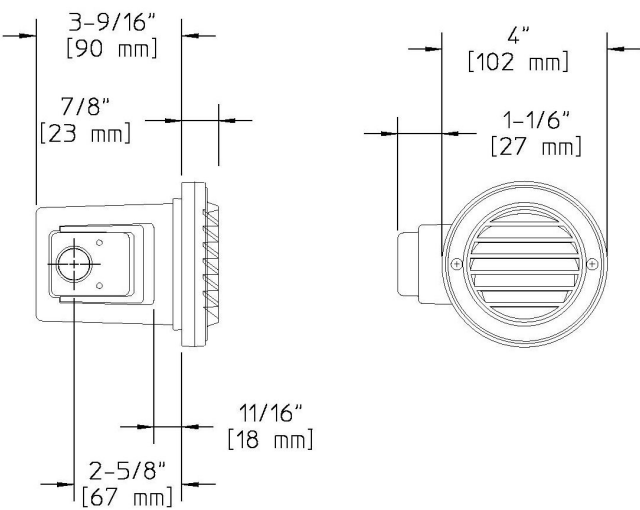

Ordering Guide

Example: RRCL14 P A

Product Code	RRCL14	Aluminum Steplyte
Finish	A B H	Black White Bronze
Thermal Protection	P	Thermal Protection Device *1

*1 Thermal protection device is required for installations in drywall plaster, wood or other non-masonry materials. Add the suffix "P" to the catalog number to order.

Specifications

- HOUSING:**
Housing and finish ring are die-cast aluminum. Aluminum housing contains less than 0.3% copper to prevent corrosion in concrete applications. Flange made of die-cast aluminum containing less than 0.3% copper to resist corrosion. Single-piece molded silicone gasket to prevent water, dust, and insect filtration. Fasteners are 300 series stainless steel. Internal wiring compartment contains two (2) 1/2" NPT conduit taps in the bottom and one (1) 1/2" NPT conduit tap in both sides. A removable plug will be provided for one (1) tap.
- FINISH:**
Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B117 specifications. Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting.
- OPTICAL ASSEMBLY:**
High performance aluminum reflector for optimum symmetrical light output. Horizontal louver lens made of die-cast copper-free aluminum with a 45° cutoff and frosted tempered glass.
- LAMPING:**
10W maximum T3 bi-pin lamp. Lamp is included with fixture. Lower wattage lamps are acceptable.
- ELECTRICAL ASSEMBLY:**
Bi-pin socket type (G4) with 250° C high temperature teflon coated wire leads. Single contact bayonet (S-8). 12 volt fixture is pre-wired with 6-ft. pigtail of 18-2 AWG, 105° C, SPT-1W wire. Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included. 12 Volt system requires remote transformer, not included.
- ACCESSORIES:**
MAKM - Masonry construction mounting kit. MAKNS - New stud wall construction mounting kit. MAKES - Existing stud wall construction mounting kit.
- WARRANTY:**
Three-year limited warranty.
- CERTIFICATIONS:**
ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards. ADA Compliant when used in indoor and outdoor wall applications.
- Height :**
4" 102mm)
- Depth:**
3 9/16" (90mm)
- Max. Weight:**
1.65 lb.