


P170 Specification Sheet

|               |              |                    |
|---------------|--------------|--------------------|
| Project Name: | Location:    | MFG: Philips Hadco |
| Fixture Type: | Catalog No.: | Qty:               |

Ordering Guide

Example: P170 10 A T D

|                            |      |   |
|----------------------------|------|---|
| Product Code               | P170 |   |
| Pole Height                | 10   | 10'   |
|                            | 12   | 12'   |
|                            | 14   | 14'   |
|                            | 16   | 16'   |
|                            | 18   | 18'   |
|                            | 20   | 20'   |
| Finish                     | A    | Black                                       |
|                            | B    | White                                       |
|                            | G    | Verde                                       |
|                            | H    | Bronze                                      |
|                            | I    | Gray  |
|                            | J    | Green                                       |
| Outlet Location (Optional) | T    | 12" Down from Top - Aligned with House Side |
| Outlet Options (Optional)  | D    | Standard Duplex                             |
|                            | G    | GFI Duplex                                  |

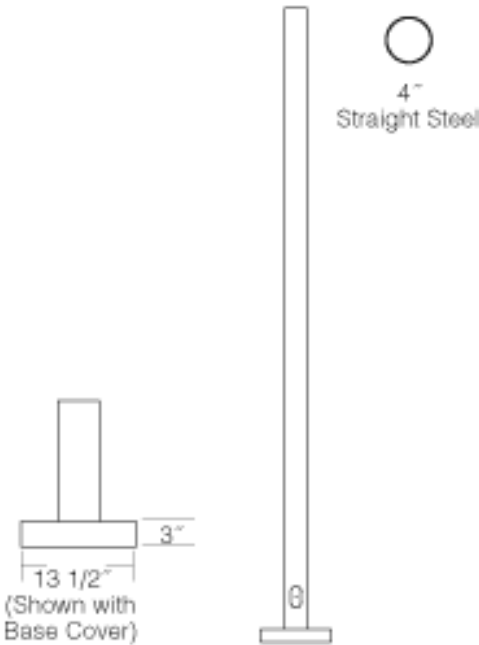

Specifications

**HOUSING:**  
Hot rolled low carbon steel. 1100-0 spun aluminum alloy. 7 ga. hot rolled steel. Anchor rods are hot dipped galvanized steel .

**FINISH:**  
A durable polyurethane enamel finish is applied after assemblies are shot blasted to create a surface profile which allows for the highest level of paint adhesion. Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B-117-64 and ANSI/ASTM G53-77 specifications. For larger projects where a custom color is required, contact the factory for more information.

**WARRANTY:**  
Three-year limited warranty.

**OUTLET:**  
Standard Duplex Outlet has universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant. GFI Duplex Outlet has dual-function indicator light, universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant.

**Tenon/Top:**  
4" OD

**Bolt Circle:**  
7 - 11"

**Anchor Rods:**  
(4) 3/4" dia. x 19"

**Base Dimensions:**  
13" dia. x 3/4"

**Base Cover:**  
(Included) 13 1/2" dia. x 3"

**Hand Hole :**  
2" x 4" Oval

P170 Specification Sheet

|               |              |                    |
|---------------|--------------|--------------------|
| Project Name: | Location:    | MFG: Philips Hadco |
| Fixture Type: | Catalog No.: | Qty:               |

Shaft:  
4" Straight

Wall Thickness:  
7 ga. steel

Height :  
10', 12', 14', 16', 18', 20'

Pole EPA Values

| Windspeed(mph) | Height  |         |         |         |         |         |
|----------------|---------|---------|---------|---------|---------|---------|
|                | 10'     | 12'     | 14'     | 16'     | 18'     | 20'     |
| 80             | 43.3200 | 36.3000 | 24.8000 | 21.4000 | 18.6200 | 16.2800 |
| 100            | 27.2200 | 22.6200 | 15.2900 | 13.0000 | 11.1100 | 9.5000  |