


Aluminum Pathlyte (SML3) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

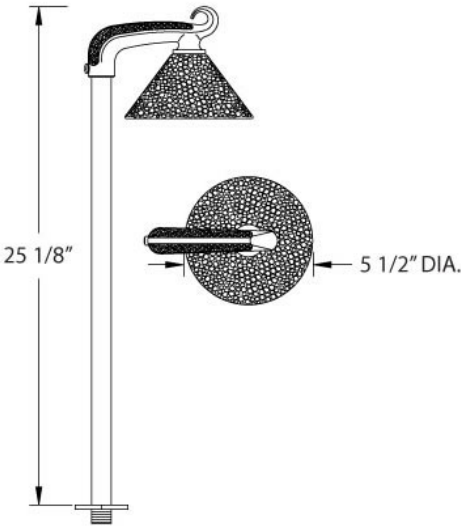

Ordering Guide

Example: SML3 A

Product Code	SML3	Aluminum Pathlyte
Finish	A H G	Black Bronze Verde

Specifications

- HOUSING:**
Cast aluminum decorative arm. 1/2" schedule 40 Aluminum stem 20" long, threads to screw on to accessory mounting stake or junction box. Hammered copper shade brushed finish with clear coat.
- FINISH:**
Black thermoset, hand rubbed-verde antiqued over black thermoset powdercoat, or bronze thermoset powdercoat.
- LAMPING:**
Lamp is included with fixture. Xenon lamp life is approximately 10,000 hours. Higher wattages may be used only with glass panels installed. 18W maximum wedge base T-5 Xenon.
- ELECTRICAL ASSEMBLY:**
12 Volt system requires remote transformer, not included. Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included. 12 Volt fixture is pre-wired with 4-ft pigtail of 18-2 AWG. Wedge base socket type (T3-1/4 or T5).
- WARRANTY:**
Three-year limited warranty.
- CERTIFICATIONS:**
ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations.
- Height :**
25 1/8" (638mm)
- Width:**
5 1/2" (140mm)
- Max. Weight:**
5.25 lb.