


Aluminum Pathlyte (OPSL1) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

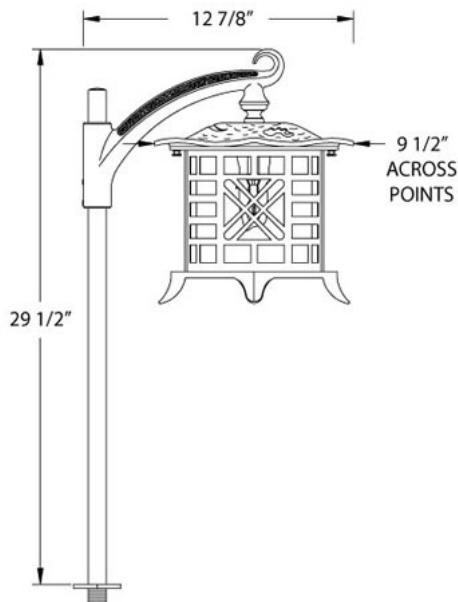

Ordering Guide

Example: OPSL1 G

Product Code	OPSL1	Aluminum Pathlyte
Finish	G A	Verde Black

Specifications

HOUSING:

Cast aluminum decorative arm. All cast aluminum construction. 1/2" schedule 40 Aluminum stem 20" long, threads to screw on to accessory mounting stake or junction box. Two-piece aluminum cage with cone bottom. Cast aluminum roof.

FINISH:

Black thermoset, hand rubbed-verde antiqued over black thermoset powdercoat, or bronze thermoset powdercoat.

OPTICAL ASSEMBLY:

White acrylic lens.

LAMPING:

Lamp is included with fixture. Xenon lamp life is approximately 10,000 hours. 18W maximum wedge base T-5 Xenon. Higher wattages may be used only with glass panels installed.

ELECTRICAL ASSEMBLY:

12 Volt system requires remote transformer, not included. Low voltage quick connector, catalog #LVC3 included for easy hook-up to the low voltage supply cable, not included. 12 Volt fixture is pre-wired with 4-ft pigtail of 18-2 AWG. Wedge base socket type (T3-1/4 or T5).

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations.

Height :

29 1/2" (749mm)

Width:

9 1/2" (241mm)

Projection:

12 7/8" (327mm)

Max. Weight: