LED Aluminum Downlyte (DRL1D) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

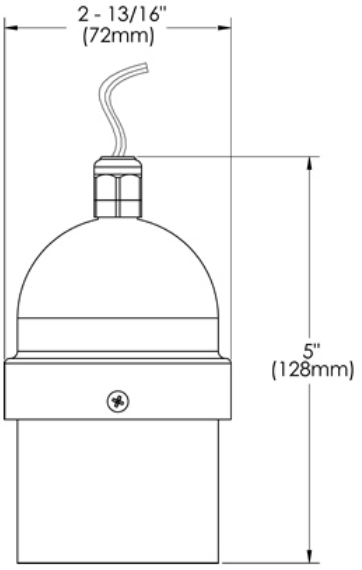

Ordering Guide

Example: DRL1D C2 A

Product Code	DRL1D	LED Aluminum Downlyte
CCT	C2	Cool Low Power (2.4 total watts)
	C3	Cool High Power (3.8 total watts)
	W2	Warm Low Power (2.4 total watts)
	W3	Warm High Power (3.8 total watts)
Finish	A	Black
	G	Verde

Specifications

HOUSING:
Cast aluminum top cap with aluminum body and 5-ft stainless suspension cable. Fasteners are 300 series stainless steel.

FINISH:
Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting. Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B117 specifications.

OPTICAL ASSEMBLY:
Clear tempered glass lens.

LAMPING:
3,000K or 4,000K color temperature (CCT). Approximately 50,000 hours of operational life (at 25°C ambient temp. and 70% lumen maintenance).

ELECTRICAL ASSEMBLY:
Input voltage range (VAC): 10 - 14. Input frequency: 60Hz. (magnetic low voltage transformer required). Integral surge protector built into LED driver circuit. 12 volts, 3.8 total watts consumed (high wattage) or 2.4 total watts consumed (low wattage). 12 Volt fixture is pre-wired with 8-ft pigtail of 18-2 AWG, 105° C, SPT-1W wire.

IP RATING:
IP66: Dust-tight and sealed against direct jets of water.

WARRANTY:
Five-year limited warranty.

CERTIFICATIONS:
ETL listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

Height :
6 1/16" (154mm)

Width:
2 13/16" (71mm)

Max. Weight:
1.2 lb

Note: Philips reserves the right to modify the above details to reflect changes in the cost of materials and/or production and/or design without prior notice.
100 Craftway Drive, Littlestown, PA 17340 | P: +1-717-359-7131 F: +1-717-359-9289 | http://www.hadco.com | Copyright 2013 Philips
HW2