


Independence (V1503) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

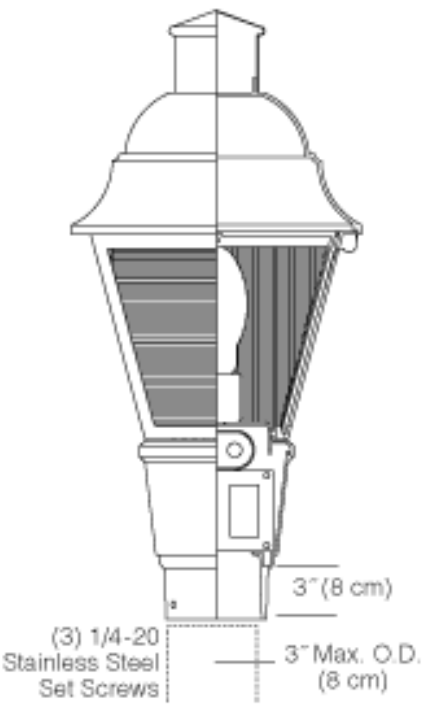

Ordering Guide

Example: V1503 A B3 N D 70S E

Product Code	V1503	Independence
Finish	A B G H J	Black White Verde Bronze Green
Optics	B3 B5	Type III Refractive Panels Type V Refractive Panels
Photo Control	N	None
Socket	D G	Medium Mogul
Wattage	70S 100S 70H 100H	70W HPS 100W HPS 70W MH 100W MH
Voltage	E F G H	120V 208V 240V 277V

\*1 Available with Medium base (D) socket only.

Specifications

- HOUSING:**  
356 HM high-strength, low-copper, proprietary cast aluminum alloy . Hinged roof with stainless steel thumb screw. A weatherproof ballast assembly isolates the ballast from water and heat for longer life. Easy access to lamp. All non-ferrous fasteners prevent corrosion and ensure longer life. Slip Fitter Dimensions: 3" I.D. x 3" deep .
- FINISH:**  
Thermoset polyester powdercoat is electrostatically applied after a five-stage conversion cleaning process and bonded by heat fusion thermosetting. Laboratory tested for superior weatherability and fade resistance in accordance with ASTM B117 specifications. For larger projects where a custom color is required, contact the factory for more information.
- OPTICAL ASSEMBLY:**  
Type III Refractive Panels. Type V Refractive Panels. Optically designed, U.V. stabilized, injection molded, acrylic refractive panels. Tool-less removal panels for ease of cleaning.
- LAMPING:**  
MH and HPS Medium base: E17. HPS Mogul base: E23.5.
- ELECTRICAL ASSEMBLY:**  
Ballast assemblies are mounted to an aluminum plate or spinning, which is mounted inside the ballast pod. 4kv rated porcelain mini-can base. Nickel-plated screw shell with center contact. 4kv rated mogul base porcelain socket. Nickel-plated screw shell with center contact.
- BALLAST:**  
All HID ballasts are core and coil and regulated with power factors better than 90% (HPF). Ballast provides +/- 5% lamp power regulation with +/- 10% input voltage regulation. Ballasts are factory pre-wired and tested. Metal halide ballasts are capable of starting at -20° F or -30° C and HPS at -40°F or -40°C. NOTE: All ballasts are EISA / Title 20 / Title 24 compliant where applicable.
- CERTIFICATIONS:**  
ETL Listed to U.S. safety standards for wet locations. cETL listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.
- WARRANTY:**  
Three-year limited warranty.
- Height :**  
21 1/4" (54cm)

# Independence (V1503) Specification Sheet

Project Name:	Location:	MFG: Philips Hadco
Fixture Type:	Catalog No.:	Qty:

**Width:**  
10 1/8" (26cm)

**Max. EPA:**  
1.12 sq. ft.

**Max. Weight:**  
20 lbs

**IESNA Classifications:**  
Semi Cutoff: Refractive Panels