


# Providence (1630) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

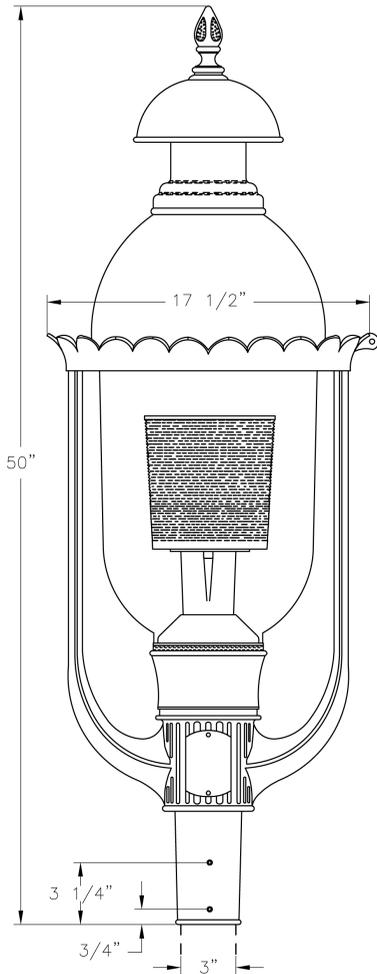

## Ordering Guide

Example: 1630 P ABS B D 50H E B B

Product Code	1630	Providence
<b>Dome/Roof</b>	P W U C	Match Finish White White Cap Copper
<b>Finish</b>	ABS ACP ARD ASI BLK BRN BRZ FGN GRA IRN RBZ SRT VBZ VCP VGN VTC WBZ WHT	Antique Brass Antique Copper Antique Red Antique Silver Black Brown Bronze Forest Green Granite Ironstone Rustic Bronze Shadow Rust Verde Bronze Verde Copper Verde Vintage Copper Weathered Bronze White
<b>Panel/Globe</b>	B P GF	Opal Acrylic Clear Polycarbonate Flat Glass
<b>Socket</b>	D G L R	Medium Mogul LED Induction
<b>Wattage/Source</b>	50H 70H 100H 150H 35S 50S 70S 100S 150S 150I 55R 85R 165R LED	50W MH 70W MH 100W MH 150W MH 35W HPS 50W HPS 70W HPS 100W HPS 150W HPS 150W INC. 55W Induction 85W Induction 165W Induction LED
<b>Voltage</b>	E F G H	120V 208V 240V 277V
<b>Distribution</b>	B C D E M P S	6" Type V Distrib. 6" Type III Distrib. 8" Type V Distrib. 8" Type II Distrib. Type III - Cutoff Optic Type V - Cutoff Optics Type III - Full

# Providence (1630) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

	T	Cutoff (GF lens only) Type V - Full Cutoff (GF lens only)	
	V	Type V - Cone Frosted	
	W	Chimney - No Internal Optics	
<b>Photoeye</b>	B	Button Eye	
	R	Twist-Lock	*1
	N	None	

\*1 Twist-Lock (R) only available with optics (M) and (P).  
 \*2 (S) and (T) optics only available with (GF) flat glass lens.

## Specifications

### CONSTRUCTION:

Cast aluminum finial with Spun aluminum roof cap & neck. Dome is hinged and self captive with spring loaded fastener supplied for easy relamping. Cast aluminum scalloped band. Gasket supplied between body & scalloped band. Cast aluminum main housing and 2 piece refractor holder assembly. Cast aluminum top ballast housing cap. Decorative brass band.

### FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

### PANELS/LENS/GLOBE:

See lenses for available options.

### ELECTRICAL ASSEMBLY:

Lantern will be prewired and tested. All electrical components are ETL listed.

### BALLAST:

Cast aluminum moisture proof compartment houses ballast and component parts. (Customer must specify wattage & voltage required.)

### MOUNTING:

Fixture mounts to 3" dia. post or tenon.

### WARRANTY:

Three-year limited warranty.

### CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

### Height:

50"

### Width:

17 1/2"

### EPA:

2.60

### Max. Weight:

40 lbs.