
Pathlight Bollard ((DISCONTINUED) 28285) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

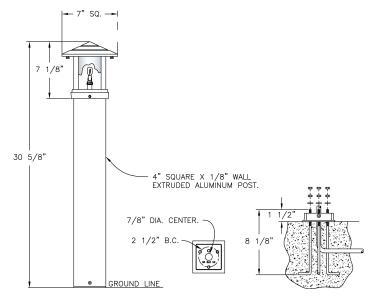

Ordering Guide

Example: (DISCONTINUED) 28285 ABS

Product Code	(DISCON 28285	ITINU (Pab) light Bollard	
Finish	ABS ACP ARD ASI BLK BRN BRZ FGN GRA IRN RBZ SRT VBZ VCP VGN VTC WBZ	Antique Brass Antique Copper Antique Red Antique Silver Black Brown Bronze Forest Green Granite Ironstone Rustic Bronze Shadow Rust Verde Bronze Verde Copper Verde Vintage Copper Weathered Bronze White	
	VVIII	VVIIIC	

Specifications

CONSTRUCTION:

Cast aluminum construction. 4" sq. x 24" long extruded aluminum tubing.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

Set of 4 Opalescent Honey Glass (OHG) panels (standard). Contact factory for other available panel options.

LAMPING

60W maximum A19 lamp per medium base socket. Lamp is not included. Higher wattages may be used only with glass panels installed.

ELECTRICAL ASSEMBLY:

Porcelain medium base socket.

INSTALLATION & MOUNTING:

Tube is mounted to the base plate with three (3) 1/4-20 x 1/2" flat head stainless steel black oxide socket cap screws.

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Height:

30 5/8" (778mm)

Width:

7" sq. (178mm)

Max. Weight:

6.25 lb.

Anchor Rods:

(3) 1/4" dia. x 8" long

Bolt Circle:

2 1/2" (64mm)



Pathlight Bollard ((DISCONTINUED) 28285) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Base Diameter:

4 1/8" sq. (105mm)

