
Small Avalon Post Mount (B8630) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Ordering Guide

Example: B8630 ABS P D

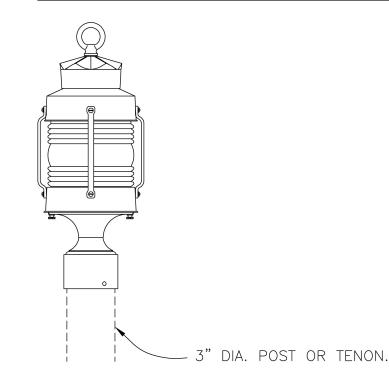

	D 0 0 0 0	
Product Code	B8630	Small Avalon
		Post Mount
Finish	ABS	Antique Brass
	ACP	Antique Copper
	ARD	Antique Red
	ASI	Antique Silver
	BLK	Black
	BRN	Brown
	BRZ	Bronze
	FGN	Forest Green
	GRA	Granite
	IRN	Ironstone
	RBZ	Rustic Bronze
	SRT	Shadow Rust
	VBZ	Verde Bronze
	VCP	Verde Copper
	VGN	Verde
	VTC	Vintage Copper
	WBZ	Weathered
		Bronze
	WHT	White
Panel/Globe	Р	Clear
		Polycarbonate
		Fresnel Lens
Lamping	D	Medium Base

Specifications

CONSTRUCTION:

Cast aluminum cage top & bottom with cast aluminum loop secured on top. Cast aluminum tie bars. Cast aluminum post fitter slips over 3" dia. post (order separately) or tenon.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

Clear Polycarbonate Fresnel Lens (CP) only.

LAMPING:

60W maximum A19 lamp per medium base socket. Lamp is not included. Higher wattages may be used only with glass panels installed.

ELECTRICAL ASSEMBLY:

Porcelain medium base socket. Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested. All electrical components are ETL listed.

MOUNTING:

Fixture mounts to 3" dia. post or tenon.

WARRANTY:

Lifetime limited warranty.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Height: 17 1/2"

Width: 6 3/4"

Max. Weight:



Copyright 2014 Koninklijke Philips N.V. (Royal Philips). All rights reserved. Specifications are subject to change without notice. Philips Lighting Company 200 Franklin Square Drive, Somerset, NJ 08873 | P: +1-855-486-2216 | www.philips.com/luminaires