


Medium Fluorescent Clifton Park Wall Mount (B174FSMFL) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

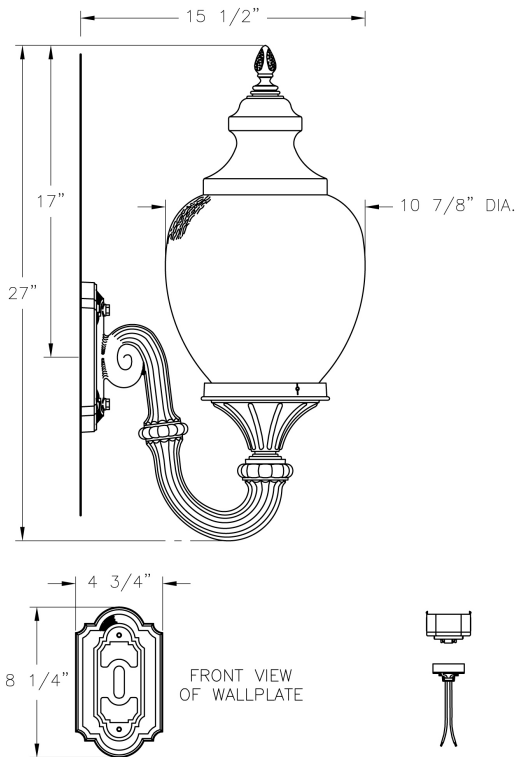

Ordering Guide

Example: B174FSMFL ABS T 13W

Product Code	B174FSMFL Medium Fluorescent Clifton Park Wall Mount
Finish	ABS Antique Brass ACP Antique Copper ARD Antique Red ASI Antique Silver BLK Black BRN Brown BRZ Bronze FGN Forest Green GRA Granite IRN Ironstone RBZ Rustic Bronze SRT Shadow Rust VBZ Verde Bronze VCP Verde Copper VGN Verde VTC Vintage Copper WBZ Weathered Bronze WHT White
Panel/Globe	T Lg. Clear Textured Polycarbonate
Wattage/Source	13W Fluorescent 13W 18W Fluorescent 18W 26W Fluorescent 26W 32W Fluorescent 32W 42W Fluorescent 42W

Specifications

CONSTRUCTION:

Cast aluminum fluted holder with two (2) weep holes. Cast Aluminum "S" fluted bracket arm. Cast aluminum finial attached to roof.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

Clear Textured Polycarbonate Globe (CTPG) only, UV stabilized

LAMPING:

42W maximum fluorescent ballast. Twist lock GX24q four (4) pin socket ballast provided. Electronic fluorescent ballast (Customer must specify wattage). 120 volt HPF supplied. (Lamp not supplied).

ELECTRICAL ASSEMBLY:

Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested. All electrical components are ETL listed.

MOUNTING:

See template for dimensions & mounting instructions.

WARRANTY:

Lifetime limited warranty.

Medium Fluorescent Clifton Park Wall Mount (B174FSMFL) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Height:

27"

Width:

10 7/8"

Projection:

15 1/2"

Top to Outlet:

17"

Max. Weight: