
## Medium Fluorescent Aerial Wall Mount (B55412FL) Specification Sheet

 Project Name:
 Location:
 MFG: Philips Lighting

 Fixture Type:
 Catalog No.:
 Qty:

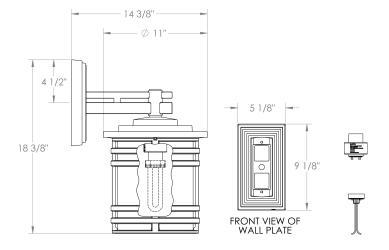

## **Ordering Guide**

Example: B55412FL ABS B 13W

Product Code	B55412FL	Medium
		Fluorescent
		Aerial Wall
		Mount
Finish	ABS	Antique Brass
	ACP	Antique Copper
	ARD	Antique Red
	ASI	Antique Silver
	BLK	Black
	BRN	Brown
	BRZ	Bronze
	FGN	Forest Green
	GRA	Granite
	IRN	Ironstone
	RBZ	Rustic Bronze
	SRT	Shadow Rust
	VBZ	Verde Bronze
	VCP	Verde Copper
	VGN	Verde
	VTC	Vintage Copper
	WBZ	Weathered
		Bronze
	WHT	White
Panel/Globe	В	Opal Acrylic
		Cylinder (only)
Wattage/Source	13W	Fluorescent
		13W
	18W	Fluorescent
		18W
	26W	Fluorescent
		26W
	32W	Fluorescent
		32W
	42W	Fluorescent
		42W

## **Specifications**

## CONSTRUCTION:

Cast aluminum bracket arm. Cast aluminum wallplate. One (1) piece cast aluminum cage. Cast aluminum round top.

#### FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

### PANELS/LENS/GLOBE:

Opal Acrylic (OA) cylinder available only.

#### LAMPING:

42W maximum fluorescent ballast. Twist lock GX24q four (4) pin socket ballast provided. Electronic fluorescent ballast (Customer must specify wattage). 120 volt HPF supplied. (Lamp not supplied).

#### **ELECTRICAL ASSEMBLY:**

Fixture is pre-wired with 18 AWG black, white, and ground wires. Lantern will be prewired and tested. All electrical components are ETL listed.

#### **MOUNTING**

See template for dimensions & mounting instructions.

## WARRANTY:

Lifetime limited warranty.

## **CERTIFICATIONS:**



# Medium Fluorescent Aerial Wall Mount (B55412FL) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Height: 18 3/8"

Width:

Projection:

14 3/8"

Top to Outlet:

Max. Weight:

20 lb.

