
Anchor Base Post (773-) Specification Sheet

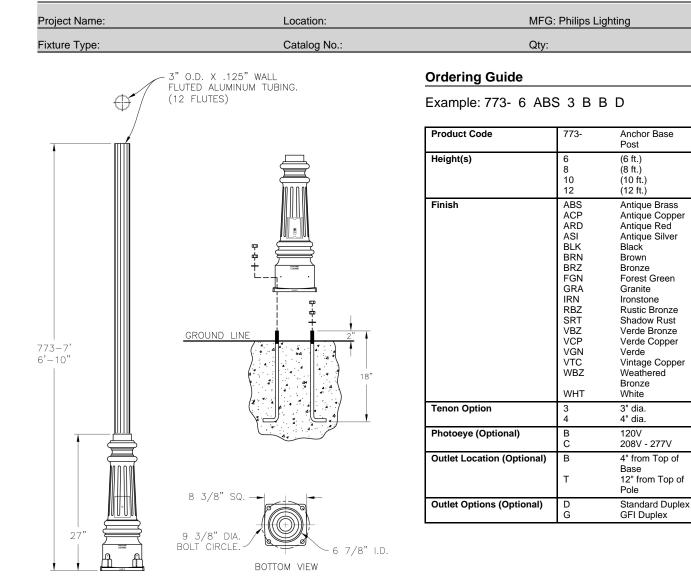

Specifications

OUTLET:

GFI Duplex Outlet has dual-function indicator light, universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant. Standard Duplex Outlet has universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant.

CONSTRUCTION:

Cast aluminum anchor base. Cast aluminum removable access door. Round Fluted post welded to base. Cast aluminum anchor bolt covers included with post.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

WARRANTY:

Three-year limited warranty.

Tenon/Top:

3" O.D.





Copyright 2014 Koninklijke Philips N.V. (Royal Philips). All rights reserved. Specifications are subject to change without notice. Philips Lighting Company 200 Franklin Square Drive, Somerset, NJ 08873 | P: +1-855-486-2216 | www.philips.com/luminaires

Anchor Base Post (773-) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Bolt Circle: 9 3/8" dia.

Anchor Rods: (4) 1/2" dia. x 18" long zinc plated steel

Base Dimensions: 8 1/2" sq. x 27"

Shaft:

3" Round Fluted

Wall Thickness: .125"

Height: 6', 8', 10', 12'

Pole EPA Values

	Height			
Windspeed(mph)	6'	8'	10'	12'
80	18.1400	11.4200	8.0400	5.9400
110	9.3800	5.7000	3.8000	2.5700
130	8.1600	4.7500	2.9100	1.6900



Copyright 2014 Koninklijke Philips N.V. (Royal Philips). All rights reserved. Specifications are subject to change without notice. Philips Lighting Company 200 Franklin Square Drive, Somerset, NJ 08873 | P: +1-855-486-2216 | www.philips.com/luminaires