
Direct Burial Post (360-) Specification Sheet

Location:



Catalog No.:

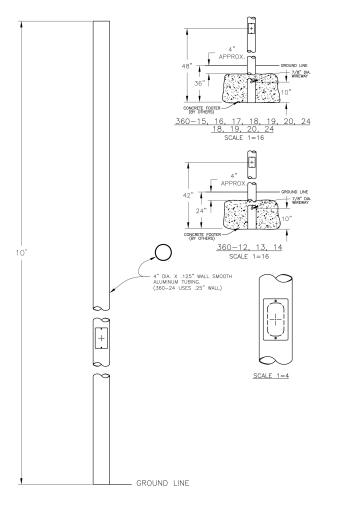

Qty:

MFG: Philips Lighting

Ordering Guide

Example: 360- 8 ABS 3 B 0 D

Product Code	360-	Direct Burial Post		
Height(s)	8 10 12 14	(8 ft.) (10 ft.) (12 ft.) (14 ft.)		
Finish	ABS ACP ARJ BLK BRN BRZN GRA IRN RBZ VCP VGN VTC WBZ WHT	Antique Brass Antique Copper Antique Red Antique Silver Black Brown Bronze Forest Green Granite Ironstone Rustic Bronze Shadow Rust Verde Bronze Verde Copper Verde Vintage Copper Weathered Bronze White		
Tenon Option	3 4	3" dia. 4" dia.		
Photoeye (Optional)	B C D	120V 208V - 277V 120V only (for 3" OD Post)		
Outlet Location (Optional)	0 T	For Direct Burial & Anchor Base 12" from Top of Pole		
Outlet Options (Optional)	D G	Standard Duplex GFI Duplex		

Specifications

OUTLET:

GFI Duplex Outlet has dual-function indicator light, universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant. Standard Duplex Outlet has universal metal weatherproof cover. Weatherproof while in use. Heavy-duty all-metal construction. Lockable security cover. Meets NEC 406.9 (B). Weather resistant.

CONSTRUCTION:

Straight aluminum direct burial post. Aluminum removable access door.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

WARRANTY:

Three-year limited warranty.

Tenon/Top: 4" O.D.

Shaft:

4" Straight





Copyright 2014 Koninklijke Philips N.V. (Royal Philips). All rights reserved. Specifications are subject to change without notice. Philips Lighting Company 200 Franklin Square Drive, Somerset, NJ 08873 | P: +1-855-486-2216 | www.philips.com/luminaires

Direct Burial Post (360-) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

Wall Thickness:

.125"

Height: 8', 10', 12', 14'

Pole EPA Values

	Height				
Windspeed(mph)	8'	10'	12'	14'	
80	9.0100	6.3000	4.5000	3.1700	
110	3.7900	2.3600	1.3200	0.5000	



Copyright 2014 Koninklijke Philips N.V. (Royal Philips). All rights reserved. Specifications are subject to change without notice. Philips Lighting Company 200 Franklin Square Drive, Somerset, NJ 08873 | P: +1-855-486-2216 | www.philips.com/luminaires