


# Bollards (6337) Specification Sheet

|               |              |                       |
|---------------|--------------|-----------------------|
| Project Name: | Location:    | MFG: Philips Lighting |
| Fixture Type: | Catalog No.: | Qty:                  |

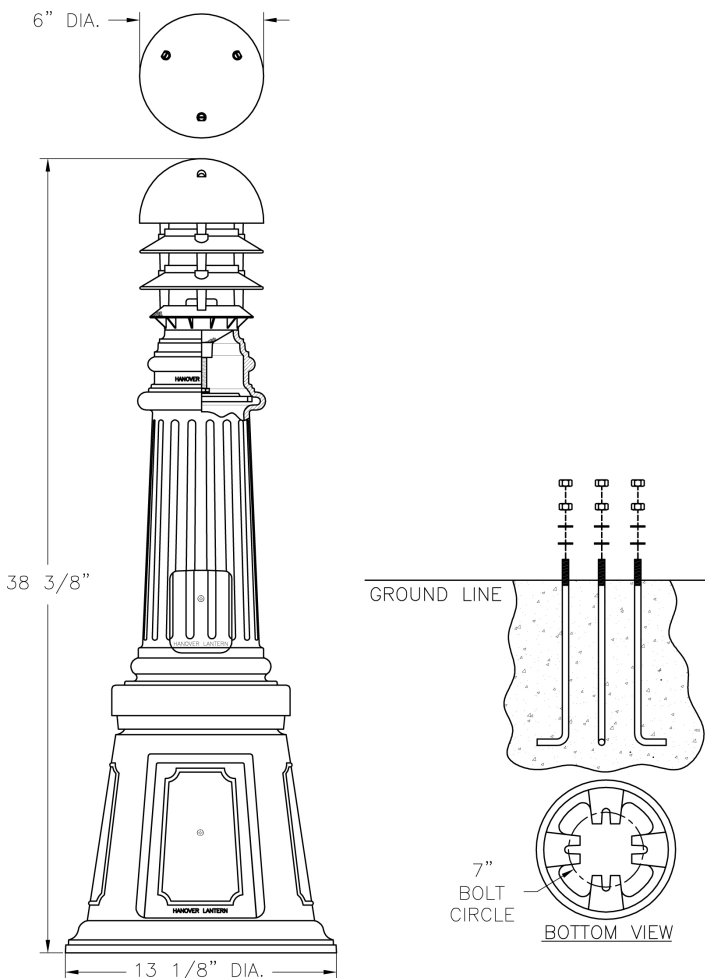

## Ordering Guide

Example: 6337 ABS G D 50H E

| Product Code          | 6337   | Bollards  |
|-----------------------|--|---|
| <b>Finish</b>         | ABS<br>ACP<br>ARD<br>ASI<br>BLK<br>BRN<br>BRZ<br>FGN<br>GRA<br>IRN<br>RBZ<br>SRT<br>VBZ<br>VCP<br>VGN<br>VTC<br>WHT<br>WBZ | Antique Brass<br>Antique Copper<br>Antique Red<br>Antique Silver<br>Black<br>Brown<br>Bronze<br>Forest Green<br>Granite<br>Ironstone<br>Rustic Bronze<br>Shadow Rust<br>Verde Bronze<br>Verde Copper<br>Verde<br>Vintage Copper<br>White<br>Weathered<br>Bronze |
| <b>Panel/Globe</b>    | G  | Clear Glass   |
| <b>Socket</b>         | D<br>F   | Medium<br>Fluorescent   |
| <b>Wattage/Source</b> | 50H<br>70H<br>100H<br>35S<br>50S<br>70S<br>100S<br>100I<br>13F<br>18F<br>26F   | 50W MH<br>70W MH<br>100W MH<br>35W HPS *1<br>50W HPS<br>70W HPS<br>100W HPS<br>100W INC. *1<br>13W *2<br>Fluorescent<br>18W *2<br>Fluorescent<br>26W *2<br>Fluorescent  |
| <b>Voltage</b>        | E<br>F<br>G<br>H   | 120V<br>208V<br>240V<br>277V  |

\*1 120V (E) Voltage Only

\*2 Only (F) Socket for Fluorescent Models

## Specifications

### CONSTRUCTION:

Die cast aluminum top round cap. Two (2) die cast aluminum tiered louvers. Die cast aluminum bottom seats on top neoprene seal. Lantern bottom fitter secured to top base with internal heavy duty mounting bar. Cast aluminum fluted top base with access door. Adapter plate welded to bottom base from inside bottom base. Cast aluminum round bottom base with access door and ground lug.

### FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

### PANELS/LENS/GLOBE:

Clear Glass bullet-shaped jar with threaded end for relamping. Neoprene gasket supplied.

### LAMPING:

Lamp is not included.

# Bollards (6337) Specification Sheet

|               |              |                       |
|---------------|--------------|-----------------------|
| Project Name: | Location:    | MFG: Philips Lighting |
| Fixture Type: | Catalog No.: | Qty:                  |

**ELECTRICAL ASSEMBLY:**

Lantern will be pre-wired and tested. All electrical components are ETL listed.

**BALLAST:**

Customer must specify wattage and voltage desired.

**MOUNTING:**

See template for dimensions & mounting instructions.

**WARRANTY:**

Three-year limited warranty.

**CERTIFICATIONS:**

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

**Bolt Circle:**

7" dia.

**Anchor Rods:**

(4) 1/2" x 15 1/2" long zinc plated steel

**Base Dimensions:**

13 1/8" dia.

**Height:**

38 3/8"