


Bollards (8646) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

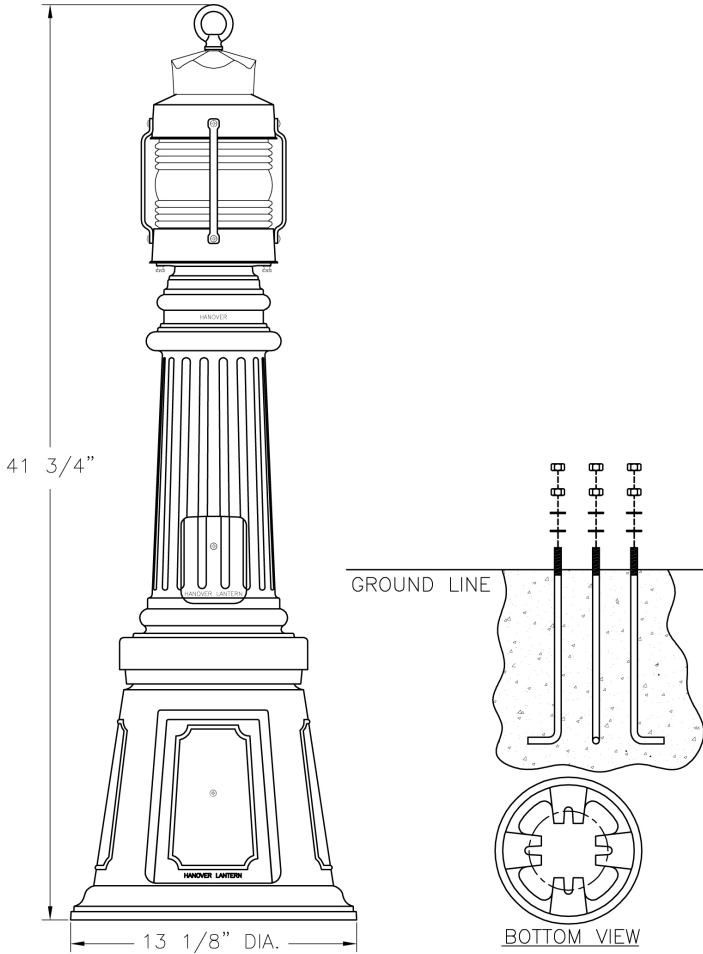

Ordering Guide

Example: 8646 WBZ P D 50H E

Product Code	8646	Bollards	
Finish	WBZ	Weathered Bronze	
	ABS	Antique Brass	
	ACP	Antique Copper	
	ARD	Antique Red	
	ASI	Antique Silver	
	BLK	Black	
	BRN	Brown	
	BRZ	Bronze	
	FGN	Forest Green	
	GRA	Granite	
	IRN	Ironstone	
	RBZ	Rustic Bronze	
	SRT	Shadow Rust	
	VBZ	Verde Bronze	
	VCP	Verde Copper	
	VGN	Verde	
VTC	Vintage Copper		
WHT	White		
Panel/Globe	P	Clear Polycarbonate	
Socket	D	Medium Fluorescent	
	F	Fluorescent	
Wattage/Source	50H	50W MH	
	35S	35W HPS	*1
	50S	50W HPS	
	60I	60W INC.	*1
	26F	26W Fluorescent	*2
	32F	32W Fluorescent	*2
Voltage	E	120V	
	F	208V	
	G	240V	
	H	277V	

*1 120V (E) Voltage Only
 *2 Only (F) Socket for Fluorescent Models

Specifications

CONSTRUCTION:

Cast aluminum loop, cap, roof. Cast aluminum round bottom base with access door & ground lug. Adapter plate welded to the bottom base from inside bottom base. Cast aluminum 16 flute top base with access door, top base secured to bottom base with adapter plate. Cast aluminum cage top & bottom with cast aluminum legs secured to roof and cage bottom.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

Clear Polycarbonate (P) U.V. stabilized Lens.

LAMPING:

Lamp is not included.

ELECTRICAL ASSEMBLY:

Lantern will be pre-wired and tested. All electrical components are ETL listed.

BALLAST:

Customer must specify wattage desired.

Bollards (8646) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

MOUNTING:

See template for dimensions & mounting instructions.

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Bolt Circle:

7" dia.

Anchor Rods:

(4) 1/2" x 15 1/2" long zinc plated steel

Base Dimensions:

13 1/8" dia.

Height:

41 3/8"