
Bollards ((DISCONTINUED) 14246) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

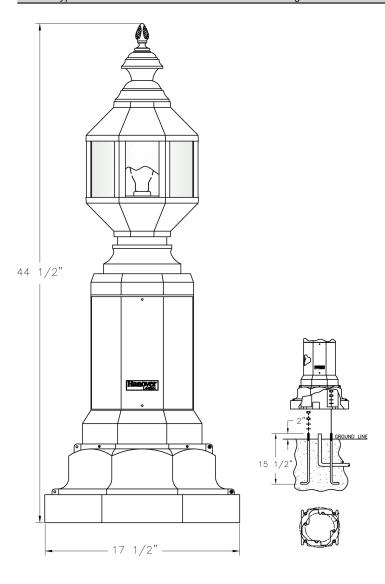

Ordering Guide

Example: (DISCONTINUED) 14246 WBZ A D 50H E

Product Code	(DISCONTINUE De)rds		
	14246		
Finish	WBZ	Weathered	
		Bronze	
	ABS	Antique Brass	
	ACP	Antique Copper	
	ARD	Antique Red	
	ASI	Antique Silver	
	BLK	Black	
	BRN	Brown	
	BRZ	Bronze	
	FGN	Forest Green	
	GRA	Granite	
	IRN	Ironstone	
	RBZ	Rustic Bronze	
	SRT	Shadow Rust	
	VBZ	Verde Bronze	
	VCP	Verde Copper	
	VGN	Verde	
	VTC	Vintage Copper	
	WHT	White	
Panel/Globe	Α	Clear Acrylic	
	В	Opal Acrylic	
	С	Clear Seeded	
		Acrylic	
	D	Bronze Tone	
		Acrylic	
	E	Clear Textured	
		Acrylic	
	M	Opal	
		Polycarbonate	
	Р	Clear	
		Polycarbonate	
	Q	Prismatic	
		Polycarbonate	
Socket	D	Medium	
	F	Fluorescent	
Wattage/Source	50H	50W MH	
	70H	70W MH	
	35S	35W HPS	*1
	50S	50W HPS	
	70S	70W HPS	
	751	75W INC.	*1
	26F	26W	*2
	l	Fluorescent	
	32F	32W	*2
		Fluorescent	
Voltage	E	120V	
_	F	208V	
	G	240V	
	Н	277V	
	-		

^{*1 120}V (E) Voltage Only

Specifications

CONSTRUCTION:

Cast aluminum finial, cap, neck, roof cap and roof. Eight extruded aluminum legs. Cast aluminum bottom cage welded to base. Cast aluminum octagon base with removable door. Cast aluminum octagonal wrap around cover.



^{*2} Only (F) Socket for Fluorescent Models

Bollards ((DISCONTINUED) 14246) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

See lenses for available options.

LAMPING:

Lamp is not included.

ELECTRICAL ASSEMBLY:

Lantern will be pre-wired and tested. All electrical components are ETL listed.

BALLAST:

Customer must specify wattage desired.

MOUNTING:

See template for dimensions & mounting instructions.

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Bolt Circle:

9" or 12 3/8" dia.

Anchor Rods:

(4) 1/2" x 15 1/2" long zinc plated steel

Base Dimensions:

17 1/2"

Height:

14 1/2"

