
Bollard ((DISCONTINUED) 28285) Specification Sheet

Project Name: Location: MFG: Philips Lighting

Fixture Type: Catalog No.: Qty:

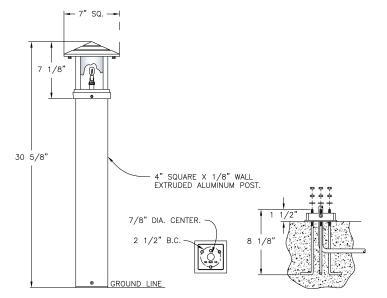

Ordering Guide

Example: (DISCONTINUED) 28285 WBZ A D 40I E

	T	
Product Code	(DISCONTINUS DE)rd	
	28285	
Finish	WBZ	Weathered
		Bronze
	ABS	Antique Brass
	ACP	Antique Copper
	ARD	Antique Red
	ASI	Antique Silver
	BLK	Black
	BRN	Brown
	BRZ	Bronze
	FGN	Forest Green
	GRA	Granite
	IRN	Ironstone
	RBZ	Rustic Bronze
	SRT	Shadow Rust
	VBZ	Verde Bronze
	VCP	Verde Copper
	VGN VTC	Verde
	WHT	Vintage Copper White
Panel/Globe	A	Clear Acrylic
	В	Opal Acrylic
	С	Clear Seeded
	_	Acrylic
	D	Bronze Tone
	F	Acrylic Frosted Glass
	l F	Prosted Glass Opalescent
	"	Honey Glass
	к	Clear Seeded
		Glass
	L	Opal Iridescent
		Glass
	М	Opal
	1*1	Polycarbonate
Socket	D	Medium
Wattage/Source	40I	40W INC.
Voltage	E	120V

Specifications

CONSTRUCTION:

Cast aluminum square roof. Four (4) extruded aluminum legs. Cast aluminum square bottom cage frame. 4" sq. x .125" wall extruded aluminum post. Cast aluminum 4" sq. anchor base supplied with anchor rods.

FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

PANELS/LENS/GLOBE:

See lenses for available options.

LAMPING:

Lamp is not included.

ELECTRICAL ASSEMBLY:

Poreclain medium base socket.

MOUNTING:

See template for dimensions & mounting instructions.



Bollard ((DISCONTINUED) 28285) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

WARRANTY:

Three-year limited warranty.

CERTIFICATIONS:

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations.

Bolt Circle:

2 1/2" dia.

Anchor Rods:

(3) 1/4-20 zinc plated steel

Base Dimensions:

4 1/2" sq.

Height:

30 5/8"

