


# Large Palermo Wall Mount (57612) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

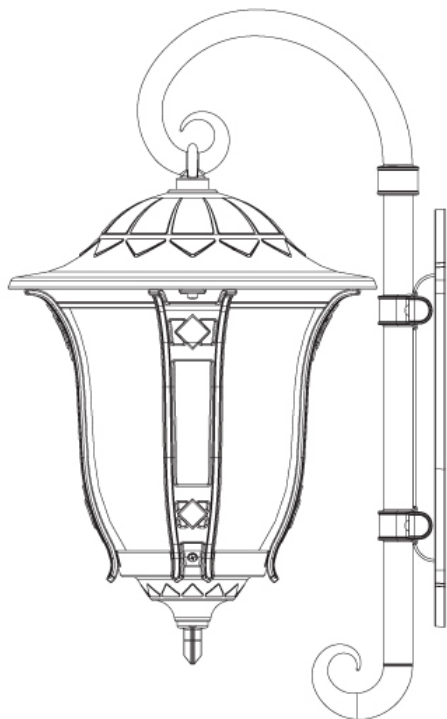

## Ordering Guide

Example: 57612 ABS FL U W N

<b>Product Code</b>	57612	Large Palermo Wall Mount
<b>Finish</b>	ABS ACP ARD ASI BLK BRN BRZ FGN GRA IRN RBZ SRT VBZ VCP VGN VTC WBZ WHT	Antique Brass Antique Copper Antique Red Antique Silver Black Brown Bronze Forest Green Granite Ironstone Rustic Bronze Shadow Rust Verde Bronze Verde Copper Verde Vintage Copper Weathered Bronze White
<b>Source</b>	FL LED	Compact Fluorescent Light Emitting Diode
<b>Panel/Globe</b>	U G F R	Linen Glass Clear Glass Globe Frosted Glass Globe Thumb Print Globe
<b>Wattage/Source</b>	W N 13 18 26 32	LED 3000K *1 LED 4000K *1 13W Fluorescent (GX24Q-1) 18W Fluorescent (GX24Q-2) 26W Fluorescent (GX24Q-3) 32W Fluorescent (GX24Q-4)
<b>Photo Control</b>	N E	None 120V

\*1 Clear glass or thumb print glass lens not recommended.

## Specifications

### CONSTRUCTION:

The housing is constructed of low copper die-cast aluminum. Cast aluminum finial. Cast aluminum roof secured with two stainless steel, black oxide or brass screws. Both the top cage frame and bottom cage frame are constructed of cast aluminum. Four decorative cast aluminum cage legs. Cast aluminum post fitter slips over 3" dia. post or tenon.

### FINISH:

Resilient TGIC thermoset polyester powdercoat paint is electrostatically applied to every fixture. Specially formulated for Philips Outdoor Lighting, it provides UV protection, and the highest temperature rating in the industry. In addition to the standard color choices shown, a spectrum of custom colors is available.

# Large Palermo Wall Mount (57612) Specification Sheet

Project Name:	Location:	MFG: Philips Lighting
Fixture Type:	Catalog No.:	Qty:

**PANELS/LENS/GLOBE:**

Precision designed frosted glass globe with silicone rubber gasket on top and bottom.

**LAMPING:**

Fluorescent: Wattage specific, 120V only. -20°C to 50°C operating temperature. Medium LED: Driver set at 700mA. 24W 120-277 VAC, 50-60Hz. Large LED: Driver set at 700mA. 24W 120-277 VAC, 50-60Hz.

**ELECTRICAL ASSEMBLY:**

Driver or ballast and component parts mounted inside ballast compartment.

**WARRANTY:**

Five Year Limited Warranty

**CERTIFICATIONS:**

ETL Listed to U.S. safety standards for wet locations. cETL Listed to Canadian safety standards for wet locations. Manufactured to ISO 9001:2008 Standards.

**Height:**

30 1/4"

**Width:**

15 3/4"

**Ext.:**

18 5/8"

**Top to Outlet:**

12 7/8"

**Max. Weight:**

20 lbs.