

# Pique™



Recessed

2'x2'

1 TT5 (25W)




mesoOptics®



airwave™



RESPONSE®

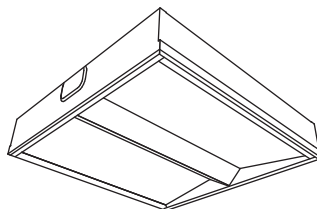

Project Name

Spec Type

Notes




## Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.


9122 [ ] [ ] B125 - [ ] - [ ] - [ ] - [ ] - [ ]							
Product Series & Size	Version	Configuration	Lamping	Housing	Wiring	Voltage	Ballast
Pique 2'x2'	<b>D1</b> Standard T-Grid <b>D2</b> Slot T-Grid <b>A1</b> Air Return on Standard T-Grid <b>A2</b> Air Return on Slot T-Grid	<b>ST</b> Standalone <b>CR</b> Continuous Row	1 TT5 (25W)	<b>S</b> Standard (22ga.) <b>C</b> Chicago Plenum <b>T</b> Standard w/ Frame Restraint	<b>1</b> 1 cct <b>7</b> 1 cct Dimming	<b>1</b> 120V <b>2</b> 277V <b>3</b> 347V	<b>E</b> Standard Ballast
	See details on next page				Consult website for complete list of standard wiring options		Consult website for ballast manufacturer information

## Upgrades & Accessories


Please indicate with check mark.

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Lamps Included & Installed
<input type="checkbox"/> Job Pack	<input type="checkbox"/> Flex Whip
<input type="checkbox"/> Drywall Kit  <p>Not available in continuous row</p>	Can be mounted to wood frame or with hanger wire   <p>Wood Frame    Hanger Wire</p>
<input type="checkbox"/> Response Daylight For details visit <a href="http://www.ledalite.com/response">www.ledalite.com/response</a>	

## Cross Section

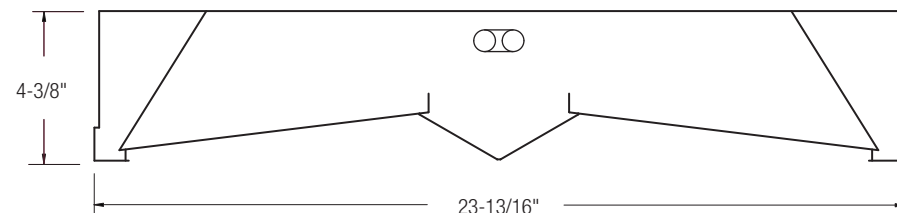

## Side View

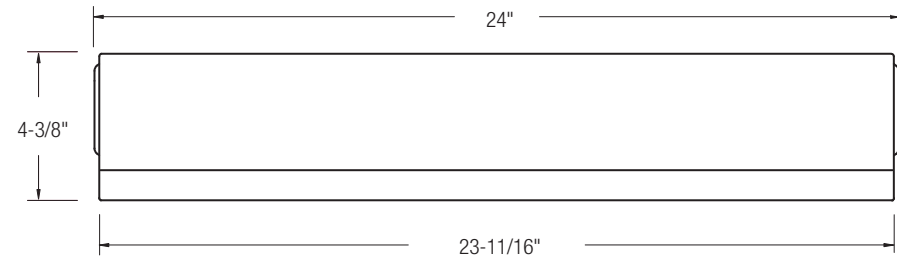


# Pique™

Recessed

2'x2'

1 TT5 (25W)



## Photometry

### Report Summary


**Report #** 9901484  
**Filename** 9122D1B125.ies  
**Efficiency** 82.3%

**Spacing Criteria** 1.23 @ 0° along  
1.44 @ 90° across

Meets RP-1-04 recommendations for VDT-Normal spaces

### Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	770	770	770	770	770	
5	767	771	781	786	797	76
15	744	767	819	862	891	232
25	683	733	822	899	919	373
35	577	640	701	759	742	430
45	436	467	503	541	520	384
55	287	309	325	356	354	296
65	165	187	205	232	229	204
75	69	89	109	130	131	114
85	10	25	31	40	39	33
90	0	0	0	0	0	

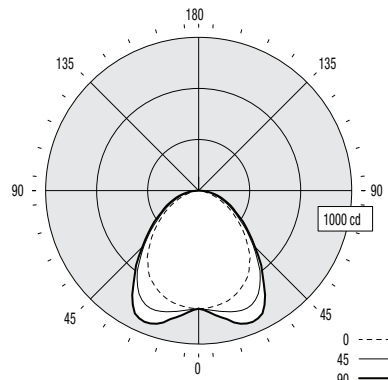

### Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0
	70	50	30	10	70	50	30	10	70	50	30	10	0
0 RCR	98	98	98	98	95	95	95	91	91	91	91	82	
1	90	86	83	80	88	84	81	81	78	76	70		
2	82	76	71	66	80	74	70	71	67	64	59		
3	75	67	61	56	73	66	60	64	58	54	51		
4	69	60	53	48	67	59	52	57	51	47	44		
5	64	54	47	42	62	53	46	51	45	41	38		
6	59	49	42	37	58	48	41	46	40	36	34		
7	55	44	37	32	54	44	37	42	36	32	30		
8	51	40	34	29	50	40	33	39	33	29	27		
9	48	37	31	26	47	37	30	36	30	26	24		
10	45	34	28	24	44	34	28	33	27	24	22		

Based on a floor reflectance of 0.2

### Avg. Luminance (cd/m²)


Vertical Angle	Horizontal Angle		
	0	45	90
55	1460	1654	1801
65	1140	1416	1582
75	778	1229	1477
85	335	1038	1306

IES files for this and other photometric options can be downloaded online at [www.ledalite.com](http://www.ledalite.com)

## Additional Information


### Mounting

Integrates with most common T-bar ceiling types.



D1 Standard T-Grid

Option D1 works with 9/16" and 15/16" flat T-grid ceilings. It can also be used with slot T-grid ceilings, but it will not sit flush with the bottom of the T-bar.




D2 Slot T-Grid


Option D2 is designed to sit flush with slot T-grid ceilings and some tegular tile ceiling types.

### Ceiling Types

Integrated mounting tabs can be field-adjusted to various T-bar ceiling heights for fastening directly to the T-bar grid and/or tied-off to the building structure.

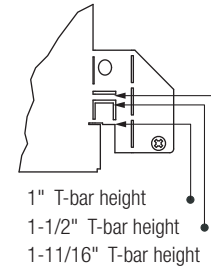

### Air Return

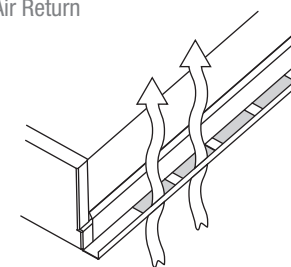

The air return version features slotted vents along the sides of the fixture. As a result, the installation method of the air return version is different to the standard version, and the fixture cannot be installed in continuous rows.

## Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

### Housing

Die-formed, post-painted, 22 gauge cold-rolled steel (New York City version is 20 gauge). Wire entrances are positioned on the side of the housing to allow easy wiring access for the installer. Multiple wire entrances are available on top or side to allow continuous row mounting of fixtures. Optional frame restraint is available to provide additional support to the optical frame.

### Weight

Maximum 23 lbs.

### Optical System

Optical assembly consists of flat acrylic panels and a center acrylic extrusion, both with a layer of protected MesoOptics® film, which efficiently provides a fully luminous, controlled, low glare batwing distribution. The optical frame ends are constructed from die-formed cold-rolled steel assembled together with extruded aluminum profiles in a sturdy frame. The frame is hinged to allow easy access to the inside of the fixture. Maintenance can be performed from below the ceiling without tools. No hardware is visible.

### Mounting

Fixture is compatible with most ceiling types. Integrated bend-out tabs are provided for different T-grid heights. Optional drywall kit is available for non-accessible ceilings. Use screws or hanger wire (supplied by others) to secure fixture.

### Ballast

Electronic. Supplied with pre-installed ballast disconnects as per national electric codes.

### Wiring

Optional flex whips are supplied in 6' lengths for 1x4, 2x2 and 2x4 fixtures. Flex connectors are supplied in 9' lengths for standard master/satellite configurations.

### Air Return

Air return option available in 2'x2' and 2'x4' sizes only. Side rails are finished in black.

### Approvals

Certified to UL & CSA Standards.  
City of Chicago Approved CCEA (housing option C).  
Designed to comply with NYC code requirements (Housing Option N).

### Finish

Housing and Frame: Post-painted, high quality powder coat. Available in white only.