

LIGHTOLIER

by  Signify


Downlighting

Uniframe CFL 5"

1001HCB Horizontal Cross Blade Trim

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

 UNIFRAME

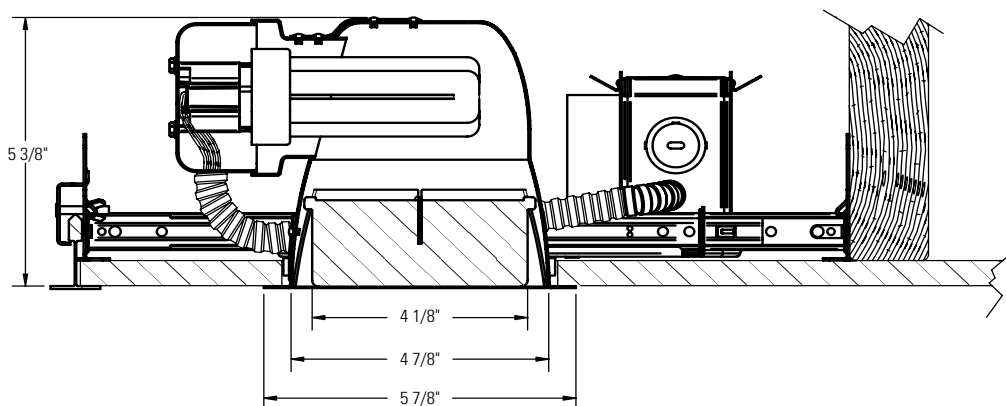

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims		Compatible Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1001HACB 1001HWHCB	5" Horizontal Shielded Cross Blade – Aluminum 5" Horizontal Shielded Cross Blade – Matte White	1001F13U	Uniframe™ Non-IC 120/277v	13w Quad/Triple
		1001F18U	Uniframe™ Non-IC 120/277v	18w Triple
		1001FR18U	Uniframe™ Non-IC Remodeler 120/277v	
		1001F18UEM	Uniframe™ Non-IC Emergency 120/277v	
		1001F26U	Uniframe™ Non-IC 120/277v	26w Triple
		1001FR26U	Uniframe™ Non-IC Remodeler 120/277v	
		1001F26UEM	Uniframe™ Non-IC Emergency 120/277v	
		1001FD26L1	Uniframe™ Non-IC Lutron Dimming 120v	26w Triple
		1001FD26L2	Uniframe™ Non-IC Lutron Dimming 277v	
		1001FD26MX1	Uniframe™ Non-IC Advance Mark10 Dimming 120v	26w Triple
		1001FD26MX2	Uniframe™ Non-IC Advance Mark10 Dimming 277v	
		1001FD13M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	13w Triple
		1001FD18M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	18w Triple
		1001FD26M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	26w Triple
		1001FRD26MX1	Uniframe™ Non-IC Advance Mark10 Dimming 120v Rem.	26w Triple
		1001FRD26MX2	Uniframe™ Non-IC Advance Mark10 Dimming 277v Rem.	
		1001F13ICU/N	Performance IC 120/277v	13w Quad/Triple
		1001F18ICU/N	Performance IC 120/277v	18w Triple
		1001F26ICU/N	Performance IC 120/277v	26w Triple
		1001FDICMX1/N	Performance IC Advance Mark10 Dimming 120v	26w Triple
		1001FDICMX2/N	Performance IC Advance Mark10 Dimming 277v	

1001HCB Uniframe CFL 5"

Horizontal Cross Blade Trim


Features

- 1. **Reflector:** Formed aluminum. Matte White flange.
- 2. **Finishes:** WH = Matte White Paint
A = Aluminum Paint
- 3. **Cross Blade:** .50" thick aluminum "floating" cross blade painted white or aluminum.
- 4. **Performance Data:** 60° Cutoff angle.
See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

26W TRIPLE TUBE LAMP, LUMEN RATING = 1710 LMS, ELECTRONIC BALLAST, WHITE CROSS BLADE



SC = 0.88 x 1.02
1 – 0°
2 – 90°
CERTIFIED TEST REPORT NO. 3347FR
COMPUTED BY LSI PROGRAM
**TEST-LITE*

CANDLEPOWER SUMMARY			ZONAL LUMEN SUMMARY		ZONAL LUMENS AND PERCENTAGES			
Angle	0° CP	90° CP	Zone	Lumens	Zone	Lumens	%Lamp	%Fixt
0	410	410	0-10	38.54	0-30	259.77	15.2	49
5	399	416	10-20	99.44	0-40	361.86	21.2	68.3
10	371	412	20-30	121.79	0-60	475.74	27.8	89.8
15	332	379	30-40	102.09	0-90	529.86	31	100
20	291	352	40-50	67.1	90-120	0	0	0
25	254	310	50-60	46.79	90-150	0	0	0
30	214	247	60-70	31.49	90-180	0	0	0
35	170	178	70-80	17.63	0-180	529.86	31	100
40	124	114	80-90	5	** Efficiency = 30% **			
45	90	75	90-100	0				
50	69	62	100-110	0				
55	51	51	110-120	0				
60	41	40	120-130	0				
65	32	32	130-140	0				
70	24	24	140-150	0				
75	17	17	150-160	0				
80	10	10	160-170	0				
85	4	5	170-180	0				
90	0	0						

COEFFICIENTS OF UTILIZATION												
Ceiling	80%				70%				50%			
Wall	70	50	30	10	50	10	50	10	50	10	50	10
RCR	Zonal Cavity Method - Effective Floor Reflectance = 20%											
0	37	37	37	37	36	36	33	33	32	32	31	31
1	34	33	32	31	33	31	31	30	30	29	27	27
2	32	30	28	27	29	27	28	26	27	25	24	24
3	30	27	25	24	27	23	26	23	25	23	22	22
4	28	25	23	21	24	21	24	21	23	20	19	19
5	26	23	21	19	16	19	22	19	21	18	18	18
6	24	21	19	17	21	17	20	17	20	17	16	16
7	23	19	17	16	19	16	19	15	18	15	15	15
8	22	18	16	14	18	14	18	14	17	14	14	14
9	20	17	15	13	17	13	16	13	16	13	13	13
10	19	16	14	12	16	12	15	12	15	12	12	12
Determined In Accordance With Current IES Published Procedures Luminaire Input Watts = 33.0												

