

LIGHTOLIER


by  Signify

Downlighting

Uniframe CFL 5"

1001HL Horizontal Wet Location Trim

 UNIFRAME

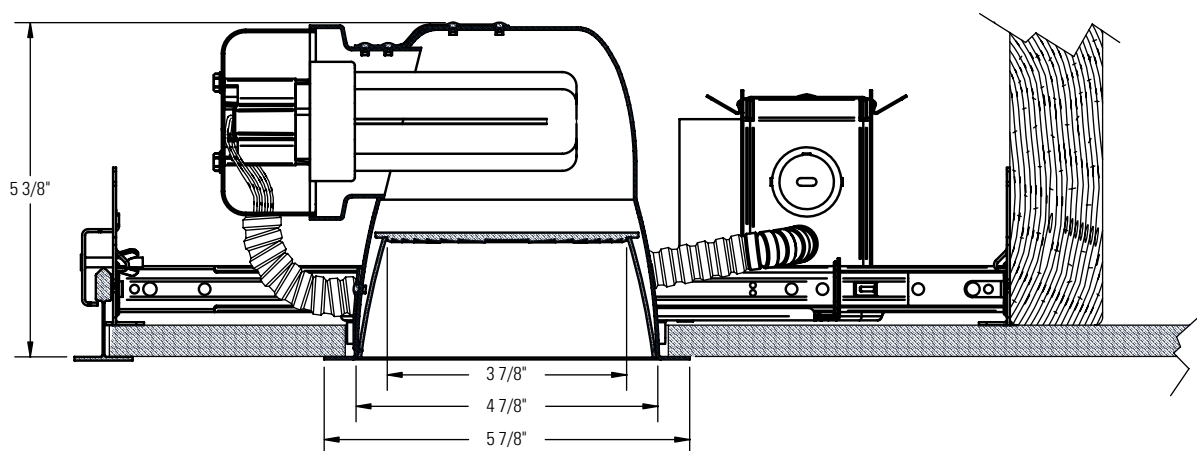

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims		Compatible Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1001HCLF 1001HCDF 1001HWHF 1001HCLC 1001HCDC 1001HWHC 1001HCLO 1001HCDO 1001HWHO	5" Horizontal Wet Location Fresnel – Specular Clear 5" Horizontal Wet Location Fresnel – Clear Diffuse 5" Horizontal Wet Location Fresnel – Matte White 5" Horizontal Wet Location Clear – Specular Clear 5" Horizontal Wet Location Clear – Clear Diffuse 5" Horizontal Wet Location Clear – Matte White 5" Horizontal Wet Location Opal – Specular Clear 5" Horizontal Wet Location Opal – Clear Diffuse 5" Horizontal Wet Location Opal – Matte White	1001F13U	Uniframe™ Non-IC 120/277v	13w Quad/Triple
		1001F18U 1001FR18U 1001F18UEM	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v Uniframe™ Non-IC Emergency 120/277v	18w Triple
		1001F26U 1001FR26U 1001F26UEM	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v Uniframe™ Non-IC Emergency 120/277v	26w Triple
		1001FD26L1 1001FD26L2	Uniframe™ Non-IC Lutron Dimming 120v Uniframe™ Non-IC Lutron Dimming 277v	26w Triple
		1001FD26MX1 1001FD26MX2	Uniframe™ Non-IC Advance Mark10 Dimming 120v Uniframe™ Non-IC Advance Mark10 Dimming 277v	26w Triple
		1001FD13M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	13w Triple
		1001FD18M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	18w Triple
		1001FD26M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	26w Triple
		1001FRD26MX1 1001FRD26MX2	Uniframe™ Non-IC Advance Mark10 Dimming 120v Rem. Uniframe™ Non-IC Advance Mark10 Dimming 277v Rem.	26w Triple
		1001F13ICU/N	Performance IC 120/277v	13w Quad/Triple
		1001F18ICU/N	Performance IC 120/277v	18w Triple
		1001F26ICU/N	Performance IC 120/277v	26w Triple
		1001FDICMX1/N 1001FDICMX2/N	Performance IC Advance Mark10 Dimming 120v Performance IC Advance Mark10 Dimming 277v	26w Triple

1001HL Uniframe CFL 5"

Horizontal Wet Location Trim


Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- Lenses:** Clear Acrylic, Textured Acrylic Fresnel, Opal Acrylic.
- Performance Data:** 60° Cutoff angle.
See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.

Labels


cULus Listed. Suitable for Wet Locations. I.B.E.W.

26W TRIPLE TUBE LAMP, LUMEN RATING = 1710 LMS, ELECTRONIC BALLAST, CL FINISH TRIM WITH CLEAR LENS

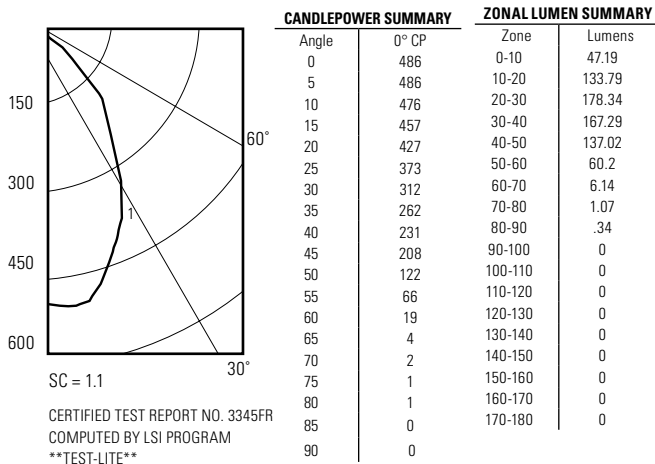

COEFFICIENTS OF UTILIZATION												
Ceiling	80%				70%		50%		30%		0	
Wall	70	50	30	10	50	10	50	10	50	10	0	0
RCR	Zonal Cavity Method - Effective Floor Reflectance = 20%											
Room Cavity Ratio	0	51	51	51	51	50	50	48	48	46	46	43
	1	48	47	45	44	46	44	44	42	42	41	39
	2	45	43	41	39	42	38	40	38	39	37	35
	3	42	39	36	34	38	34	37	34	36	33	32
	4	39	36	33	31	35	30	34	30	33	30	29
	5	37	33	30	27	32	27	31	27	31	27	26
	6	35	30	27	25	30	25	29	25	28	24	23
	7	32	28	25	23	27	23	27	22	26	22	21
	8	31	26	23	21	25	21	25	20	24	20	20
	9	29	24	21	19	24	19	23	19	23	19	18
10	27	22	19	18	22	19	22	17	21	17	17	
Determined In Accordance With Current IES Published Procedures Luminaire Input Watts = 33.0												

26W TRIPLE TUBE LAMP, LUMEN RATING = 1710 LMS, ELECTRONIC BALLAST, CL FINISH TRIM WITH FRESNEL LENS

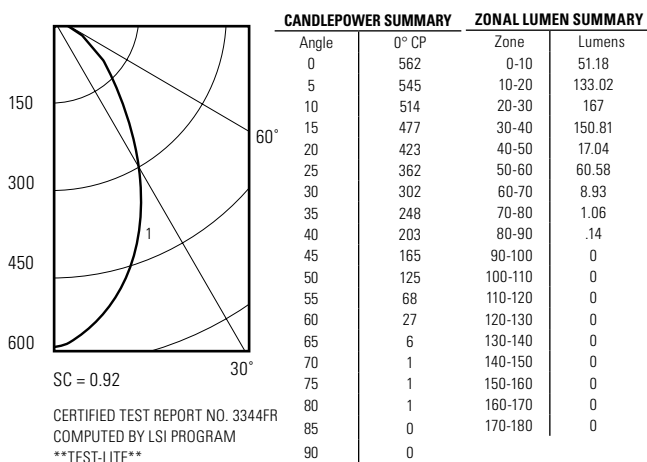

COEFFICIENTS OF UTILIZATION												
Ceiling	80%				70%				50%			
Wall	70	50	30	10	50	10	50	10	50	10	50	10
RCR	Zonal Cavity Method - Effective Floor Reflectance = 20%											
Room Cavity Ratio	0	48	48	48	48	47	47	45	45	43	43	40
	1	45	44	43	42	43	41	42	40	40	39	37
	2	43	40	38	37	40	36	38	36	37	35	33
	3	40	37	34	33	36	32	35	32	34	31	30
	4	37	34	31	29	33	31	32	29	31	28	27
	5	35	31	28	26	31	26	30	29	27	26	25
	6	33	29	26	24	32	24	28	23	27	23	22
	7	31	26	24	22	26	22	26	21	25	21	21
	8	29	25	22	20	24	20	24	20	23	20	19
	9	27	23	20	18	23	18	22	18	22	18	17
	10	26	21	19	17	21	17	21	17	21	17	16

Determined In Accordance With Current IES Published Procedures
Luminaire Input Watts = 33.0

1001HL Uniframe CFL 5"

Horizontal Wet Location Trim

26W TRIPLE TUBE LAMP, LUMEN RATING = 1710 LMS, ELECTRONIC BALLAST, CL FINISH TRIM WITH OPAL LENS

