


Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____



1001HCLSW/1001F Series
Uniframe CFL Wall Wash

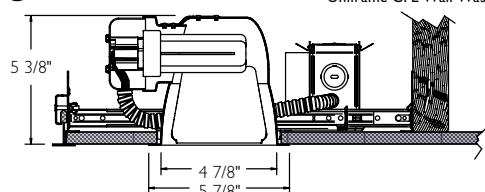

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe Performance Series Reflector Trims		Compatible Compact Fluorescent Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1001HCLSW	5" Horizontal Single Wall Wash Specular Clear	1001F13U	Uniframe Non-IC 120/277v	13w Quad Triple
		1001F18U 1001FR18U 1001F18UEM	Uniframe Non-IC 120/277v Uniframe Non-IC Remodeler 120/277v Uniframe Non-IC Emergency 120/277v	18w Triple
		1001F26U 1001FR26U 1001F26UEM	Uniframe Non-IC 120/277v Uniframe Non-IC Remodeler 120/277v Uniframe Non-IC Emergency 120/277v	26w Triple
		1001FD26MX1 1001FD26MX2	Uniframe Non-IC Advance Mark10 Dimming 120v Uniframe Non-IC Advance Mark10 Dimming 277v	26w Triple
1001HCDSW	5" Horizontal Single Wall Wash Clear Diffuse	1001FD13M7U 1001FD18M7U 1001FD26M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	13w Triple 18w Triple 26w Triple
1001HWHSW	5" Horizontal Single Wall Wash Matte White	1001FRD26MX1 1001FRD26MX2	Uniframe Non-IC Advance Mark10 Dimming 120v Rem. Uniframe Non-IC Advance Mark10 Dimming 277v Rem.	26w Triple
		1001F13ICU/N 1001F18ICU/N 1001F26ICU/N	Performance IC 120/277v	13w Quad/Triple 18w Triple 26w Triple
		1001FDICMX1/N	Performance IC Advance Mark10 Dimming 120v	26w Triple

Features

Reflector: Formed aluminum. Matte White flange.

Finishes: CL = Specular Clear (Iridescent Free coating)

CD = Clear Diffuse

WH = Matte White Paint

Wall Wash Kick Reflector: Formed aluminum. Clear finish.

Performance Data: 60° Cutoff angle. See attached photometric reports for distribution and efficiency data.

Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

©2015 Koninklijke Philips N.V. All rights reserved.
philips.com/luminaires


1001HSW 10/15

1001HSW Uniframe CFL 5"

Horizontal Wall Wash Trim

Lighting Data

Footcandles On Wall: Multiple Units

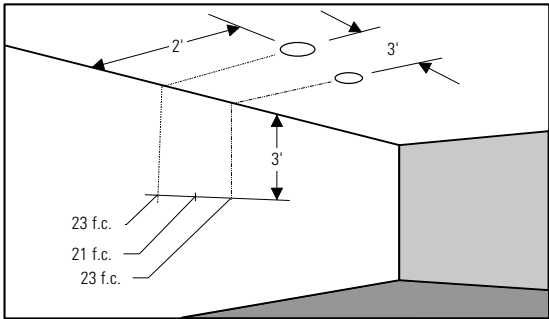

EXAMPLE: 26w with multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 23 f.c. beneath units and 21 f.c. between units.

26w Triple Tube Lamp

2' from Wall - 2' On Center

		2'		
Distance From Ceiling in Feet	1'	29	27	29
2'	43	43	43	
3'	33	33	33	
4'	24	25	24	
5'	17	18	17	
6'	12	13	12	
7'	9	9	9	
8'	7	7	7	
9'	5	5	5	

2' from Wall - 3' On Center

		3'		
Distance From Ceiling in Feet	1'	23	16	23
2'	27	29	27	
3'	23	21	23	
4'	17	17	17	
5'	12	12	12	
6'	9	9	9	
7'	7	7	7	
8'	5	5	5	
9'	4	4	4	

18w Triple Tube Lamp

2' from Wall - 2' On Center

		2'		
Distance From Ceiling in Feet	1'	27	26	27
2'	41	42	41	
3'	32	33	32	
4'	23	23	23	
5'	16	17	16	
6'	11	12	11	
7'	8	8	8	
8'	6	6	6	
9'	5	5	5	

2' from Wall - 3' On Center

		3'		
Distance From Ceiling in Feet	1'	22	16	22
2'	26	27	26	
3'	22	21	22	
4'	16	16	16	
5'	12	12	12	
6'	9	9	9	
7'	7	7	7	
8'	5	5	5	
9'	4	4	4	

13w Quad Tube Lamp

2' from Wall - 2' On Center

		2'		
Distance From Ceiling in Feet	1'	13	12	13
2'	19	19	19	
3'	16	16	16	
4'	12	12	12	
5'	8	8	8	
6'	6	6	6	
7'	4	4	4	
8'	3	3	3	
9'	2	2	2	

2' from Wall - 3' On Center

		3'		
Distance From Ceiling in Feet	1'	11	7	11
2'	12	13	12	
3'	11	11	11	
4'	8	8	8	
5'	6	6	6	
6'	4	4	4	
7'	3	3	3	
8'	2	2	2	
9'	1	1	1	

