

LIGHTOLIER

by  Signify



Downlighting

Uniframe CFL 5"

1001SW Vertical Wall Wash Trim

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

 Uniframe

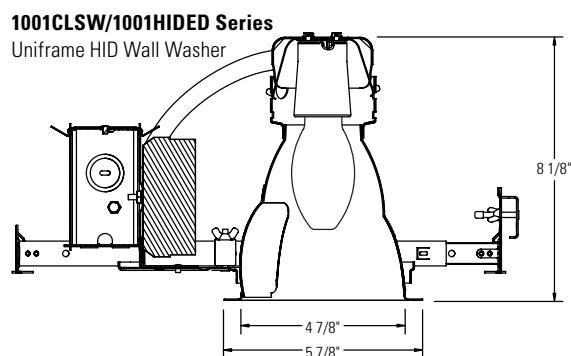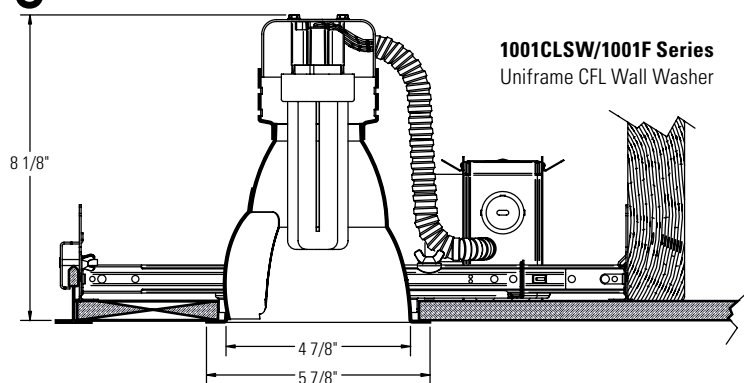

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe Performance Series Reflector Trims

Compatible Compact Fluorescent Uniframe Frame-In Kits
 (See Individual Frame-In Kit Specification Sheets)

Catalog No.	Description	Catalog No.	Installation Type	Lamping
1001CLSW 1001CDSW 1001WHSW*	5" Vertical Single Wall Wash – Specular Clear 5" Vertical Single Wall Wash – Clear Diffuse 5" Vertical Single Wall Wash – Matte White	1001F13U	Uniframe Non-IC 120/277v	13w Quad/Triple
		1001F18U 1001FR18U 1001F18UEM	Uniframe Non-IC 120/277v Uniframe Non-IC Remodeler 120/277v Uniframe Non-IC Emergency 120/277v	18w Triple
		1001F26U 1001FR26U 1001F26UEM	Uniframe Non-IC 120/277v Uniframe Non-IC Remodeler 120/277v Uniframe Non-IC Emergency 120/277v	26w Triple
		1001FD26L1 1001FD26L2	Uniframe Non-IC Lutron Dimming 120v Uniframe Non-IC Lutron Dimming 277v	26w Triple
		1001FD26MX1 1001FD26MX2	Uniframe Non-IC Advance Mark10 Dimming 120v Uniframe Non-IC Advance Mark10 Dimming 277v	26w Triple
		1001FD13M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	13w Triple
		1001FD18M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	18w Triple
		1001FD26M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	26w Triple
		1001FRD26MX1 1001FRD26MX2	Uniframe Non-IC Advance Mark10 Dimming 120v Rem. Uniframe Non-IC Advance Mark10 Dimming 277v Rem.	26w Triple
		Compatible HID Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
		1001HIDED50U 1001HIDED70U	Uniframe Non-IC	50W ED17 Open 70W ED17 Open
		1001HIDED50ULC 1001HIDED70ULC	Non-IC Chicago Plenum	50W ED17 Open 70W ED17 Open

* Not listed for HID

1001SW Uniframe CFL 5"

Vertical Wall Wash Trim


Features

- 1. **Reflector:** Formed aluminum. Matte White flange.
- 2. **Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- 3. **Wall Wash Kick Reflector:** Formed aluminum. Clear finish.
- 4. **Performance Data:** 60° Cutoff angle.
See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.


Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Lighting Data Footcandles On Wall: Multiple Units

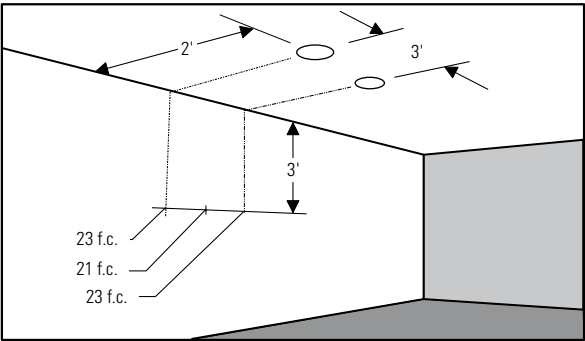

EXAMPLE: 26w with multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 23 f.c. beneath units and 21 f.c. between units.

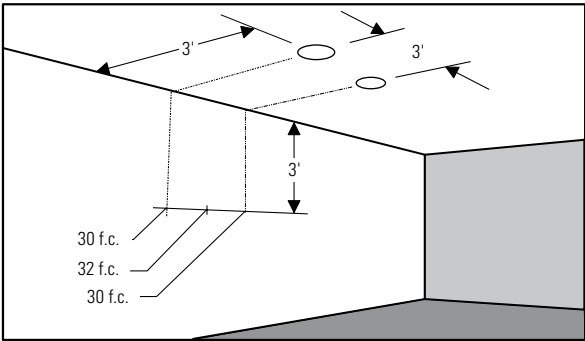

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 30 f.c. beneath units and 32 f.c. between units.

26w Triple Tube Lamp

2' from Wall - 2' On Center

		2'		
	1'	24	23	24
	2'	35	34	35
	3'	32	33	32
	4'	25	25	25
	5'	18	19	18
	6'	13	13	13
	7'	10	10	10
	8'	7	7	7
	9'	6	6	6

2' from Wall - 3' On Center

		3'		
	1'	19	13	19
	2'	26	23	26
	3'	23	21	23
	4'	17	17	17
	5'	13	13	13
	6'	9	10	9
	7'	7	7	7
	8'	6	6	6
	9'	4	4	4

70W ED17 Coated Metal Halide

2' from Wall

		3'		
	1'	29	25	29
	2'	51	47	51
	3'	55	54	55
	4'	46	46	46
	5'	35	35	35
	6'	26	26	26
	7'	20	20	20
	8'	15	16	15
	9'	12	12	12

Reflector Trim: 1001CLSW
Report No.: 4068FR
Initial lumens: 4700 lms
Efficiency: 49.0%

1001SW Uniframe CFL 5"

Vertical Wall Wash Trim

Lighting Data Footcandles On Wall: Multiple Units

2' from Wall - 2' On Center

Distance From Ceiling in Feet

1'	33	30	33
2'	48	46	48
3'	38	38	38
4'	28	28	28
5'	20	20	20
6'	15	15	15
7'	12	12	12
8'	10	10	10
9'	8	8	8

2' from Wall - 3' On Center

Distance From Ceiling in Feet

1'	22	16	27
2'	36	27	36
3'	26	25	26
4'	19	19	19
5'	14	14	14
6'	11	11	11
7'	9	9	9
8'	7	7	7
9'	6	6	6

3' from Wall

Distance From Ceiling in Feet

1'	10	10	10
2'	21	21	21
3'	30	32	30
4'	36	36	36
5'	33	33	33
6'	27	27	27
7'	21	22	21
8'	17	17	17
9'	13	14	13

3' from Wall

Distance From Ceiling in Feet

1'	8	6	8
2'	17	14	17
3'	24	23	24
4'	28	26	28
5'	25	25	25
6'	22	22	22
7'	18	18	18
8'	14	14	14
9'	11	12	11

Footcandle values are initial, rounded off and based on minimum of six units.

